



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038ML-H8TRF
(X10SLD-F single node, Intel Xeon E3-1281 v3)

SPECint®_rate2006 = 227

SPECint_rate_base2006 = 220

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

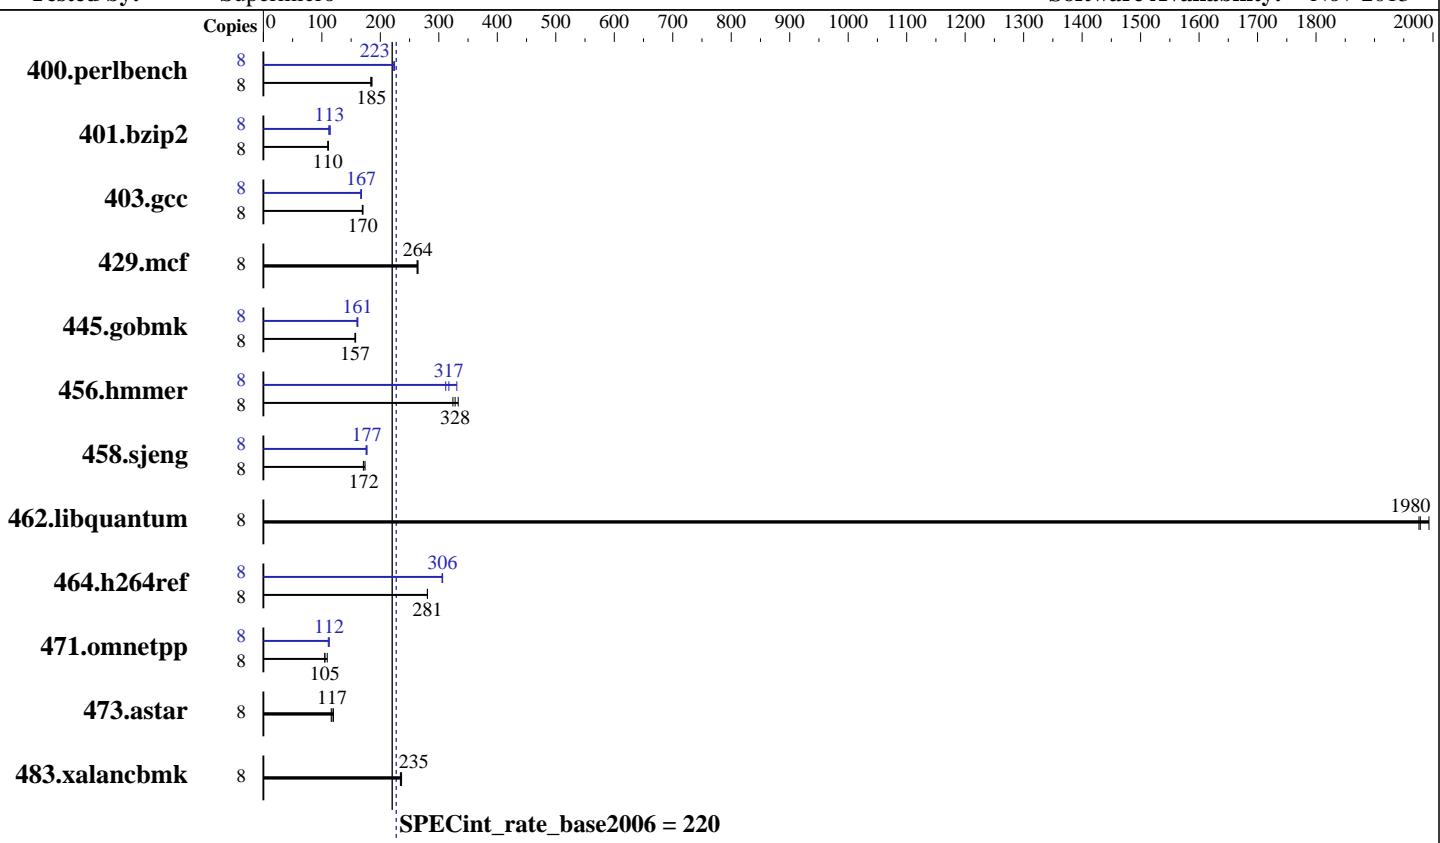

Hardware		Software	
CPU Name:	Intel Xeon E3-1281 v3	Operating System:	Red Hat Enterprise Linux Server release 6.5, Kernel 2.6.32-431.el6.x86_64
CPU Characteristics:	Intel Turbo Boost Technology up to 4.10 GHz	Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
CPU MHz:	3700	Auto Parallel:	No
FPU:	Integrated	File System:	ext4
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1 chip	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V10.0
L3 Cache:	8 MB I+D on chip per chip		
Other Cache:	None		
Memory:	16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)		
Disk Subsystem:	1 x 500 GB SATA III, 7200 RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038ML-H8TRF
(X10SLD-F single node, Intel Xeon E3-1281 v3)

SPECint_rate2006 = 227

SPECint_rate_base2006 = 220

CPU2006 license: 001176

Test date: Jun-2014

Test sponsor: Supermicro

Hardware Availability: May-2014

Tested by: Supermicro

Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	421	186	423	185	426	184	8	350	223	350	223	348	224
401.bzip2	8	699	110	700	110	694	111	8	675	114	690	112	681	113
403.gcc	8	378	170	381	169	379	170	8	385	167	384	168	387	166
429.mcf	8	278	263	276	264	276	264	8	278	263	276	264	276	264
445.gobmk	8	536	157	532	158	534	157	8	519	162	525	160	522	161
456.hmmer	8	230	324	228	328	224	333	8	239	312	235	317	226	331
458.sjeng	8	566	171	557	174	564	172	8	547	177	548	177	551	176
462.libquantum	8	83.8	1980	83.9	1980	83.2	1990	8	83.8	1980	83.9	1980	83.2	1990
464.h264ref	8	631	281	632	280	631	281	8	578	306	579	306	578	306
471.omnetpp	8	458	109	476	105	475	105	8	444	113	451	111	445	112
473.astar	8	484	116	469	120	479	117	8	484	116	469	120	479	117
483.xalancbmk	8	234	236	235	235	236	234	8	234	236	235	235	236	234

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038ML-H8TRF
(X10SLD-F single node, Intel Xeon E3-1281 v3)

SPECint_rate2006 = 227

SPECint_rate_base2006 = 220

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038ML-H8TRF
(X10SLD-F single node, Intel Xeon E3-1281 v3)

SPECint_rate2006 = 227

SPECint_rate_base2006 = 220

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hammer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038ML-H8TRF
(X10SLD-F single node, Intel Xeon E3-1281 v3)

SPECint_rate2006 = 227

SPECint_rate_base2006 = 220

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 00:05:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 July 2014.