



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**  
(A1SAi-2750F , Intel Atom C2750)

**SPECint®\_rate2006 = 103**

**SPECint\_rate\_base2006 = 101**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

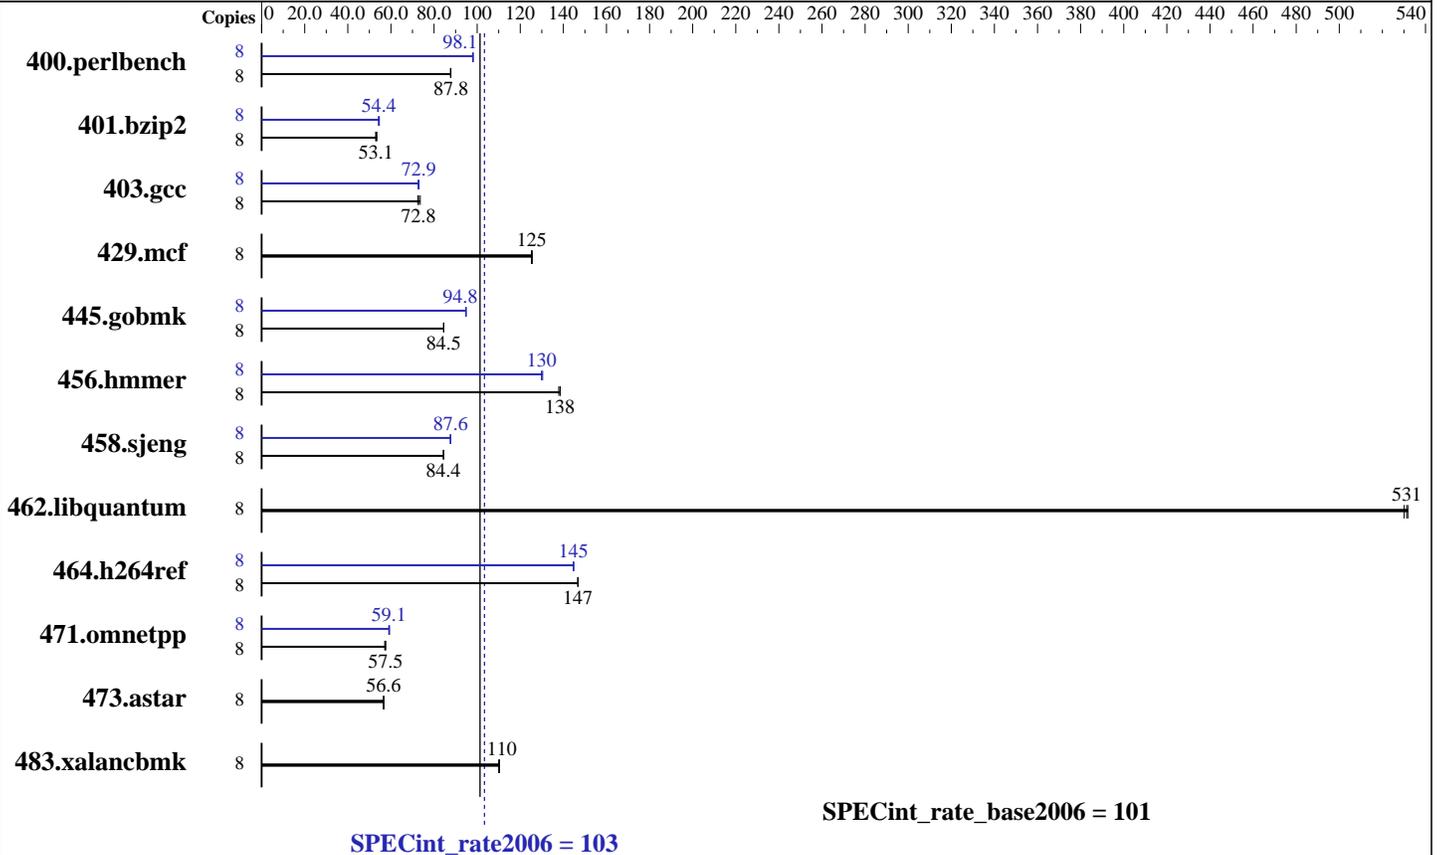

## Hardware

CPU Name: Intel Atom C2750  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 24 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 1 MB I+D shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx8 EP3L-12800E-11, ECC)  
 Disk Subsystem: 1 x 300 GB SATA II, 5000 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**  
(A1SAi-2750F , Intel Atom C2750)

SPECint\_rate2006 = 103

SPECint\_rate\_base2006 = 101

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jun-2014  
Hardware Availability: Dec-2013  
Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	892	87.6	890	87.8	<b>890</b>	<b>87.8</b>	8	796	98.2	<b>796</b>	<b>98.1</b>	798	97.9
401.bzip2	8	1457	53.0	1443	53.5	<b>1455</b>	<b>53.1</b>	8	<b>1419</b>	<b>54.4</b>	1424	54.2	1413	54.6
403.gcc	8	875	73.6	<b>884</b>	<b>72.8</b>	888	72.5	8	882	73.0	887	72.6	<b>884</b>	<b>72.9</b>
429.mcf	8	583	125	<b>582</b>	<b>125</b>	581	126	8	583	125	<b>582</b>	<b>125</b>	581	126
445.gobmk	8	993	84.5	<b>993</b>	<b>84.5</b>	994	84.4	8	<b>885</b>	<b>94.8</b>	885	94.8	884	94.9
456.hammer	8	539	139	<b>539</b>	<b>138</b>	541	138	8	575	130	572	130	<b>574</b>	<b>130</b>
458.sjeng	8	<b>1147</b>	<b>84.4</b>	1147	84.4	1147	84.4	8	1106	87.5	1103	87.8	<b>1105</b>	<b>87.6</b>
462.libquantum	8	<b>312</b>	<b>531</b>	312	532	313	530	8	<b>312</b>	<b>531</b>	312	532	313	530
464.h264ref	8	1206	147	<b>1206</b>	<b>147</b>	1206	147	8	1224	145	<b>1224</b>	<b>145</b>	1222	145
471.omnetpp	8	869	57.6	<b>870</b>	<b>57.5</b>	875	57.1	8	847	59.0	<b>845</b>	<b>59.1</b>	842	59.4
473.astar	8	991	56.7	993	56.5	<b>992</b>	<b>56.6</b>	8	991	56.7	993	56.5	<b>992</b>	<b>56.6</b>
483.xalancbmk	8	<b>501</b>	<b>110</b>	500	110	502	110	8	<b>501</b>	<b>110</b>	500	110	502	110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost Tue Jun 3 02:48:30 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Atom(TM) CPU C2750 @ 2.40GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
cache size : 1024 KB
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**  
**(A1SAi-2750F , Intel Atom C2750)**

**SPECint\_rate2006 = 103**

**SPECint\_rate\_base2006 = 101**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jun-2014  
**Hardware Availability:** Dec-2013  
**Software Availability:** Sep-2013

## Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      32866396 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
    Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 3 02:47

SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_home
                ext4      210G  35G  165G  18% /home

Additional information from dmidecode:
BIOS American Megatrends Inc. 1.0c 02/27/2014
Memory:
4x      8 GB
2x Samsung M474B1G73BH0-YK0 8 GB 1600 MHz 1 rank
2x Samsung M474B1G73BH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
System has 4x 8GB Samsung DIMMs installed.
Memory info from dmidecode is displayed incorrectly.
All four DIMMs should be 'Samsung M474B1G73BH0-YK0 8 GB 1600 MHz 2 rank'

```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

(A1SAi-2750F , Intel Atom C2750)

**SPECint\_rate2006 = 103**

**SPECint\_rate\_base2006 = 101**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jun-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xATOM_SSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3`

C++ benchmarks:

`-xATOM_SSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECint\_rate2006 = 103**

**(A1SAi-2750F , Intel Atom C2750)**

**SPECint\_rate\_base2006 = 101**

**CPU2006 license:** 001176

**Test date:** Jun-2014

**Test sponsor:** Supermicro

**Hardware Availability:** Dec-2013

**Tested by:** Supermicro

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xATOM\_SSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xATOM\_SSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: -xATOM\_SSE4.2 -ipo -O3 -no-prec-div  
429.mcf: basepeak = yes  
445.gobmk: -xATOM\_SSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xATOM\_SSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xATOM\_SSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xATOM\_SSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

### (A1SAi-2750F , Intel Atom C2750)

SPECint\_rate2006 = 103

SPECint\_rate\_base2006 = 101

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

471.omnetpp: -xATOM\_SSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 13 10:41:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 August 2014.