



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp®\_rate2006 = 64.1

SPECfp\_rate\_base2006 = 63.6

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

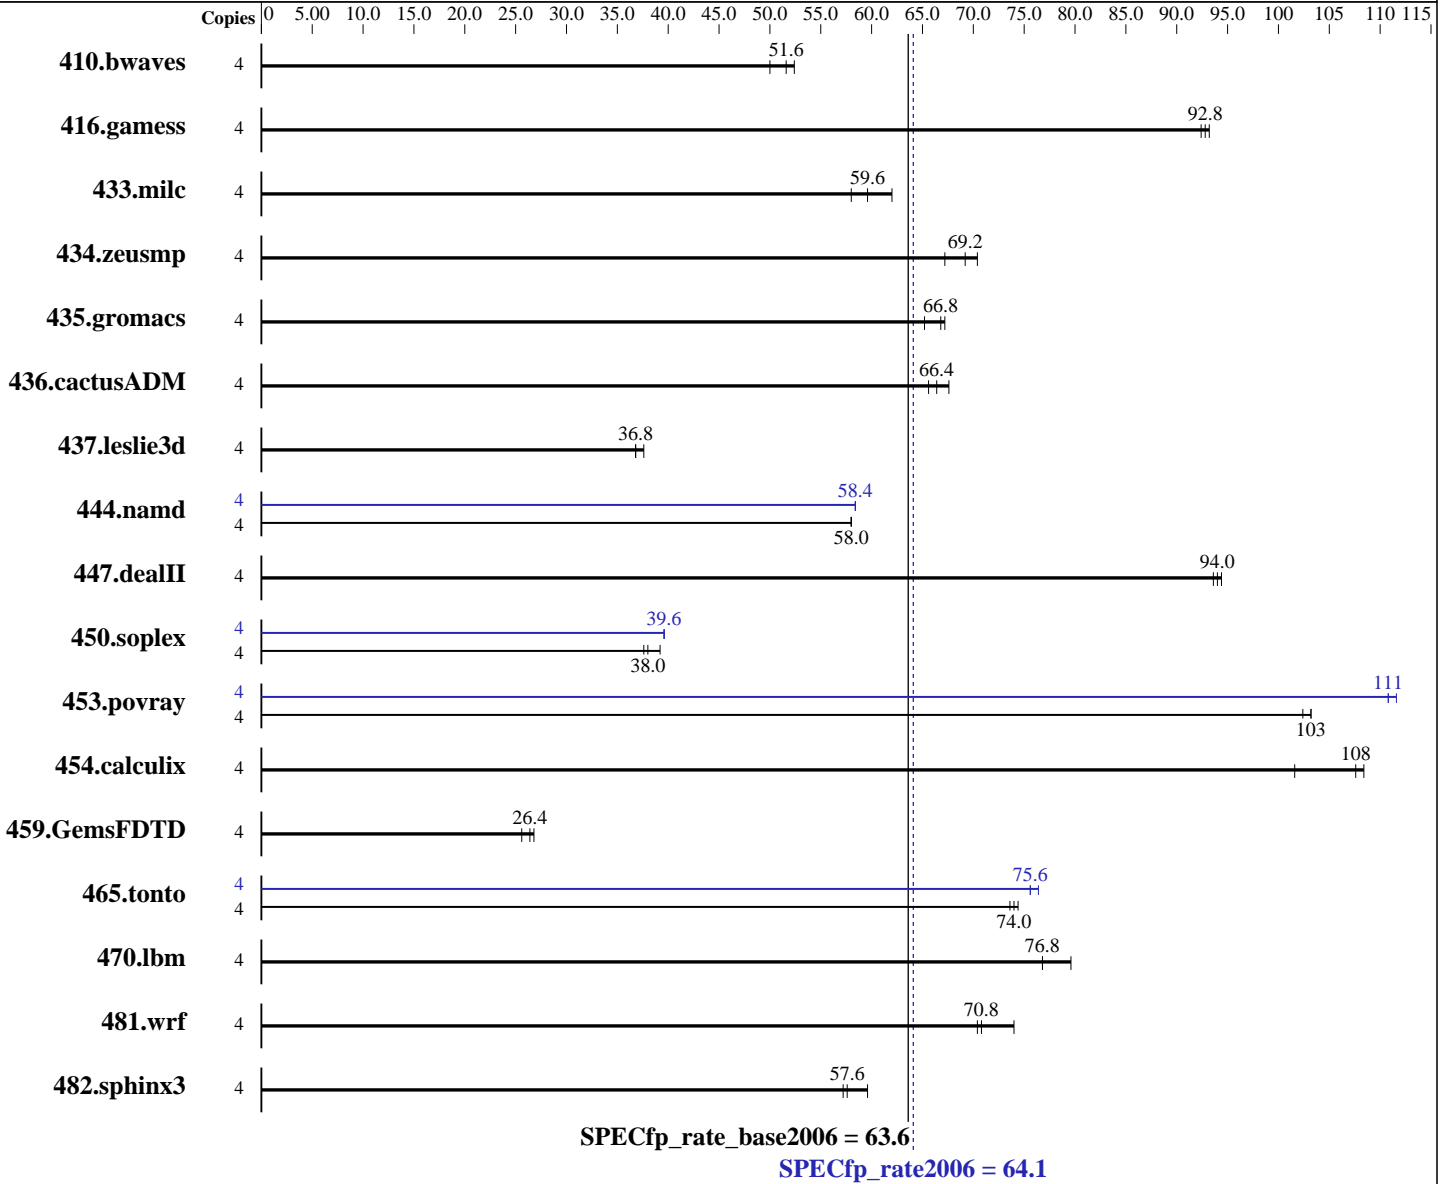

### Hardware

CPU Name: AMD A10-7850K  
 CPU Characteristics: AMD Turbo CORE technology up to 4.00 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

### Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;  
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: No

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp\_rate2006 = 64.1

SPECfp\_rate\_base2006 = 63.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

L3 Cache: None  
Other Cache: None  
Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)  
Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM  
Other Hardware: None

File System: NTFS  
System State: Default  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	1090	50.0	1038	52.4	<b>1056</b>	<b>51.6</b>	4	1090	50.0	1038	52.4	<b>1056</b>	<b>51.6</b>		
416.gamess	4	847	92.4	<b>843</b>	<b>92.8</b>	841	93.2	4	847	92.4	<b>843</b>	<b>92.8</b>	841	93.2		
433.milc	4	592	62.0	<b>616</b>	<b>59.6</b>	634	58.0	4	592	62.0	<b>616</b>	<b>59.6</b>	634	58.0		
434.zeusmp	4	518	70.4	<b>526</b>	<b>69.2</b>	540	67.2	4	518	70.4	<b>526</b>	<b>69.2</b>	540	67.2		
435.gromacs	4	<b>427</b>	<b>66.8</b>	438	65.2	425	67.2	4	<b>427</b>	<b>66.8</b>	438	65.2	425	67.2		
436.cactusADM	4	707	67.6	<b>719</b>	<b>66.4</b>	729	65.6	4	707	67.6	<b>719</b>	<b>66.4</b>	729	65.6		
437.leslie3d	4	995	37.6	<b>1018</b>	<b>36.8</b>	1027	36.8	4	995	37.6	<b>1018</b>	<b>36.8</b>	1027	36.8		
444.namd	4	<b>554</b>	<b>58.0</b>	554	58.0	554	58.0	4	550	58.4	<b>550</b>	<b>58.4</b>	550	58.4		
447.dealII	4	485	94.4	<b>486</b>	<b>94.0</b>	490	93.6	4	485	94.4	<b>486</b>	<b>94.0</b>	490	93.6		
450.soplex	4	855	39.2	<b>881</b>	<b>38.0</b>	887	37.6	4	<b>843</b>	<b>39.6</b>	843	39.6	840	39.6		
453.povray	4	207	103	208	102	<b>207</b>	<b>103</b>	4	190	112	<b>192</b>	<b>111</b>	192	111		
454.calculix	4	325	102	<b>307</b>	<b>108</b>	304	108	4	325	102	<b>307</b>	<b>108</b>	304	108		
459.GemsFDTD	4	1587	26.8	<b>1615</b>	<b>26.4</b>	1650	25.6	4	1587	26.8	<b>1615</b>	<b>26.4</b>	1650	25.6		
465.tonto	4	534	73.6	530	74.4	<b>532</b>	<b>74.0</b>	4	521	75.6	<b>519</b>	<b>75.6</b>	514	76.4		
470.lbm	4	691	79.6	<b>716</b>	<b>76.8</b>	716	76.8	4	691	79.6	<b>716</b>	<b>76.8</b>	716	76.8		
481.wrf	4	603	74.0	<b>630</b>	<b>70.8</b>	634	70.4	4	603	74.0	<b>630</b>	<b>70.8</b>	634	70.4		
482.sphinx3	4	1307	59.6	<b>1349</b>	<b>57.6</b>	1362	57.2	4	1307	59.6	<b>1349</b>	<b>57.6</b>	1362	57.2		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:  
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

**SPECfp\_rate2006 = 64.1**

**SPECfp\_rate\_base2006 = 63.6**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jun-2014

**Hardware Availability:** Jan-2014

**Software Availability:** Oct-2013

## Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on A88XPRO-PC Sun Jun 29 06:53:54 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 7 Enterprise  
OS Version : 6.1.7601 Service Pack 1 Build 7601  
System Manufacturer: System manufacturer  
System Model : System Product Name  
Processor(s) : 1 Processor(s) Installed.  
 [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3700 Mhz  
BIOS Version : American Megatrends Inc. 0703, 12/30/2013  
Total Physical Memory: 3,522 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0  
L2CacheSize : 4096  
L3CacheSize : 0  
MaxClockSpeed : 3700  
Name : AMD A10-7850K APU with Radeon(TM) R7 Graphics  
NumberOfCores : 4  
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply  
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp\_rate2006 = 64.1

SPECfp\_rate\_base2006 = 63.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64  
 416.gamess: -DSPEC\_CPU\_P64  
 433.milc: -DSPEC\_CPU\_P64  
 434.zeusmp: -DSPEC\_CPU\_P64  
 435.gromacs: -DSPEC\_CPU\_P64  
 436.cactusADM: -DSPEC\_CPU\_P64 /names:lowercase /assume:underscore  
 437.leslie3d: -DSPEC\_CPU\_P64  
 444.namd: -DSPEC\_CPU\_P64 /TP  
 447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
 -Qoption,cpp,--ms\_incompat\_treatment\_of\_commas\_in\_macros  
 450.soplex: -DSPEC\_CPU\_P64  
 453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NEED\_INVHYP -DNEED\_INVHYP  
 454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER /names:lowercase  
 459.GemsFDTD: -DSPEC\_CPU\_P64  
 465.tonto: -DSPEC\_CPU\_P64  
 470.lbm: -DSPEC\_CPU\_P64  
 481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
 482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp\_rate2006 = 64.1

SPECfp\_rate\_base2006 = 63.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

## Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000  
shlW64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib  
-link /FORCE:MULTIPLE

453.povray: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32  
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7850K APU with Radeon R7 Graphics)

SPECfp\_rate2006 = 64.1

SPECfp\_rate\_base2006 = 63.6

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

## Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F10000000000
           -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Aug 12 15:06:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2014.