



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

### SPECfp<sup>®</sup>\_rate2006 = 70.2

### Intel DQ87PG motherboard (Intel Pentium G3420)

### SPECfp\_rate\_base2006 = 69.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2012

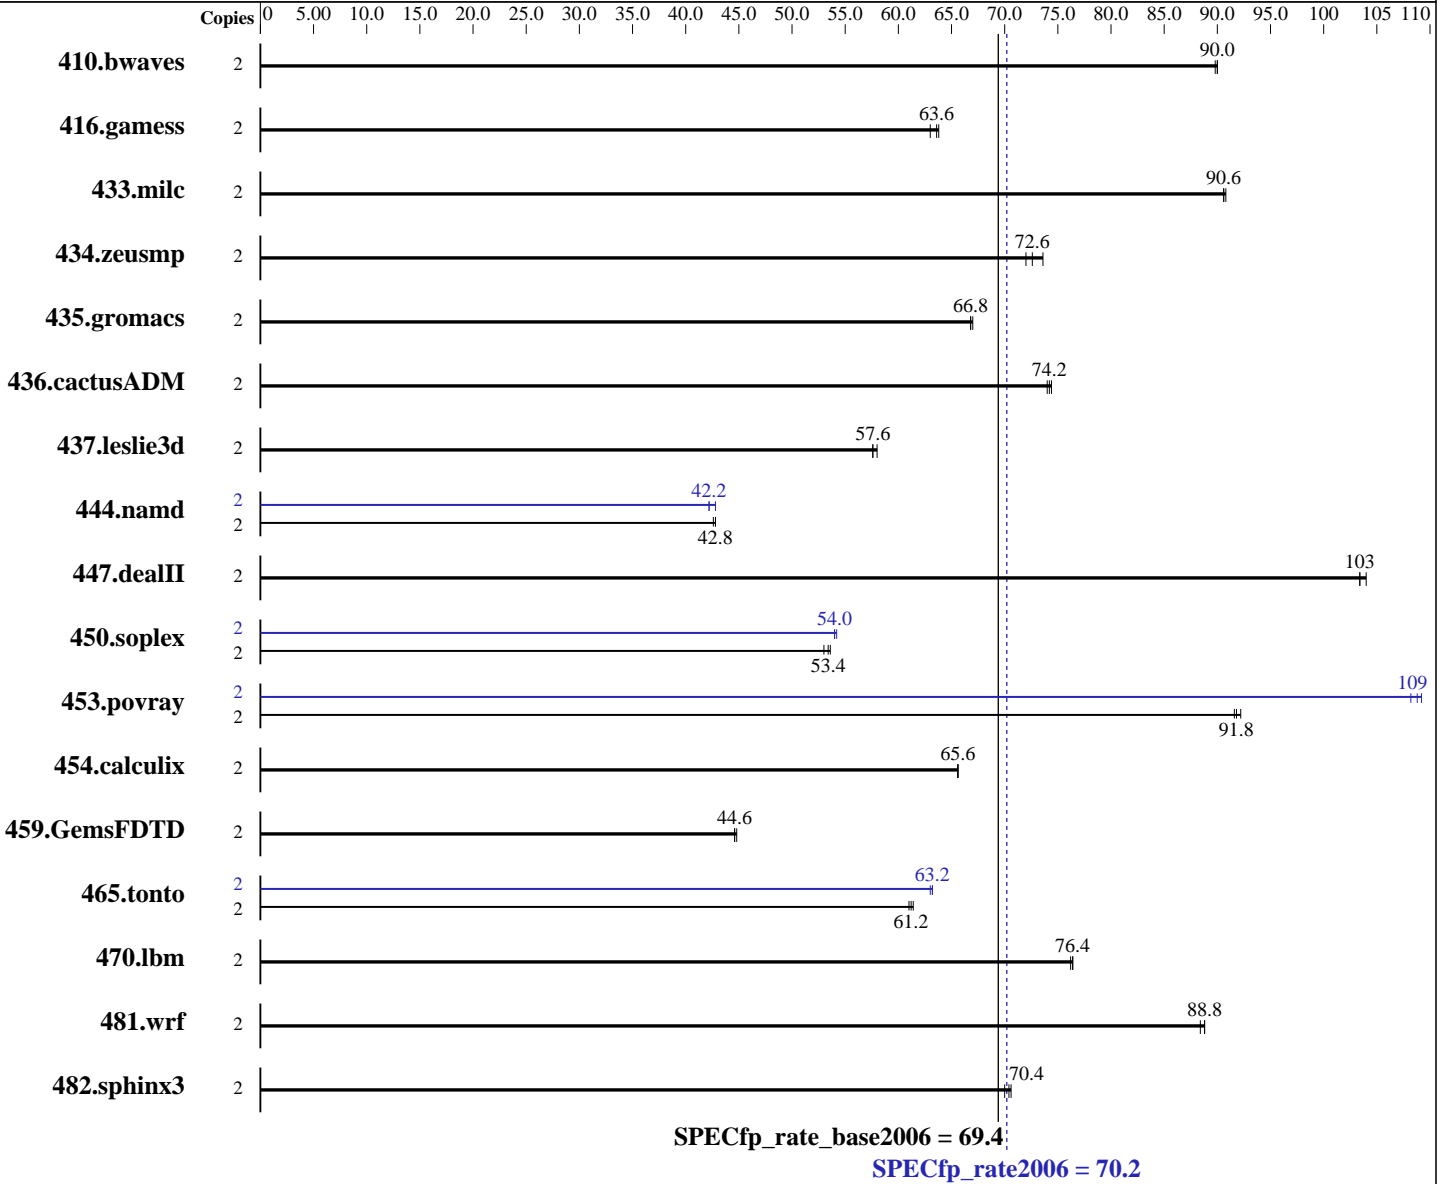

#### Hardware

CPU Name: Intel Pentium G3420  
 CPU Characteristics:  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;  
 Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1  
 Auto Parallel: No

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECfp\_rate2006 = 70.2

Intel DQ87PG motherboard (Intel Pentium G3420)

SPECfp\_rate\_base2006 = 69.4

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)  
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM  
 Other Hardware: None

File System: NTFS  
 System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	<b>302</b>	<b>90.0</b>	303	89.8	302	90.0	2	<b>302</b>	<b>90.0</b>	303	89.8	302	90.0
416.gamess	2	615	63.8	621	63.0	<b>617</b>	<b>63.6</b>	2	615	63.8	621	63.0	<b>617</b>	<b>63.6</b>
433.milc	2	202	90.8	203	90.6	<b>203</b>	<b>90.6</b>	2	202	90.8	203	90.6	<b>203</b>	<b>90.6</b>
434.zeusmp	2	247	73.6	253	72.0	<b>250</b>	<b>72.6</b>	2	247	73.6	253	72.0	<b>250</b>	<b>72.6</b>
435.gromacs	2	213	67.0	<b>214</b>	<b>66.8</b>	214	66.8	2	213	67.0	<b>214</b>	<b>66.8</b>	214	66.8
436.cactusADM	2	<b>322</b>	<b>74.2</b>	321	74.4	323	74.0	2	<b>322</b>	<b>74.2</b>	321	74.4	323	74.0
437.leslie3d	2	<b>326</b>	<b>57.6</b>	324	58.0	326	57.6	2	<b>326</b>	<b>57.6</b>	324	58.0	326	57.6
444.namd	2	<b>375</b>	<b>42.8</b>	376	42.6	375	42.8	2	375	42.8	379	42.2	<b>379</b>	<b>42.2</b>
447.dealII	2	220	104	<b>221</b>	<b>103</b>	221	103	2	220	104	<b>221</b>	<b>103</b>	221	103
450.soplex	2	<b>312</b>	<b>53.4</b>	311	53.6	315	53.0	2	<b>309</b>	<b>54.0</b>	309	54.0	308	54.2
453.povray	2	116	92.2	<b>116</b>	<b>91.8</b>	116	91.6	2	<b>97.8</b>	<b>109</b>	98.3	108	97.5	109
454.calculix	2	251	65.6	<b>252</b>	<b>65.6</b>	252	65.6	2	251	65.6	<b>252</b>	<b>65.6</b>	252	65.6
459.GemsFDTD	2	474	44.8	476	44.6	<b>476</b>	<b>44.6</b>	2	474	44.8	476	44.6	<b>476</b>	<b>44.6</b>
465.tonto	2	320	61.4	<b>321</b>	<b>61.2</b>	323	61.0	2	311	63.2	<b>311</b>	<b>63.2</b>	312	63.0
470.lbm	2	<b>360</b>	<b>76.4</b>	360	76.2	360	76.4	2	<b>360</b>	<b>76.4</b>	360	76.2	360	76.4
481.wrf	2	251	88.8	253	88.4	<b>251</b>	<b>88.8</b>	2	251	88.8	253	88.4	<b>251</b>	<b>88.8</b>
482.sphinx3	2	552	70.6	557	70.0	<b>554</b>	<b>70.4</b>	2	552	70.6	557	70.0	<b>554</b>	<b>70.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.0 was set up to generate 64-bit binaries with the command:  
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 70.2

Intel DQ87PG motherboard (Intel Pentium G3420)

SPECfp\_rate\_base2006 = 69.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2012

## Platform Notes

Sysinfo program C:\SPEC13.1/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt7C05070FB2EF Mon Sep 23 20:08:57 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 7 Enterprise  
OS Version : 6.1.7601 Service Pack 1 Build 7601  
System Manufacturer: INTEL\_  
System Model : DQ87PG\_\_  
Processor(s) : 1 Processor(s) Installed.  
 [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3200 Mhz  
BIOS Version : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013  
Total Physical Memory: 3,749 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0  
L2CacheSize : 512  
L3CacheSize : 3072  
MaxClockSpeed : 3200  
Name : Intel(R) Pentium(R) CPU G3420 @ 3.20GHz  
NumberOfCores : 2  
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)

BIOS: SATA mode set to RAID  
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066  
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply  
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 70.2

Intel DQ87PG motherboard (Intel Pentium G3420)

SPECfp\_rate\_base2006 = 69.4

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: /Qlowercase

436.cactusADM: -Qlowercase /assume:underscore

444.namd: /TP

447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG

-Qoption,cpp,--ms\_incompat\_treatment\_of\_commas\_in\_macros

453.povray: -DSPEC\_CPU\_NEED\_INVHYP -DNEED\_INVHYP

454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qcxx-features /F1000000000 shlw32M.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F1000000000 -link /FORCE:MULTIPLE

## Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 70.2

Intel DQ87PG motherboard (Intel Pentium G3420)

SPECfp\_rate\_base2006 = 69.4

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

## Peak Compiler Invocation (Continued)

C++ benchmarks:

ic1 -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ic1 -Qvc10 -Qstd=c99 ifort

## Peak Portability Flags

410.bwaves: /Qlowercase

436.cactusADM: -Qlowercase /assume:underscore

444.namd: /TP

447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG

-Qoption,cpp,--ms\_incompat\_treatment\_of\_commas\_in\_macros

453.povray: -DSPEC\_CPU\_NEED\_INVHYP -DNEED\_INVHYP

454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)

-Qipo -O3 -Qprec-div- -Oa /F1000000000 sh1W32M.lib

-link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)

-Qipo -O3 /F1000000000 sh1W32M.lib

-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)

-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

sh1W32M.lib -link /FORCE:MULTIPLE

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 70.2

Intel DQ87PG motherboard (Intel Pentium G3420)

SPECfp\_rate\_base2006 = 69.4

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000  
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:37:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2014.