



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp[®]_rate2006 = 68.6

SPECfp_rate_base2006 = 68.0

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

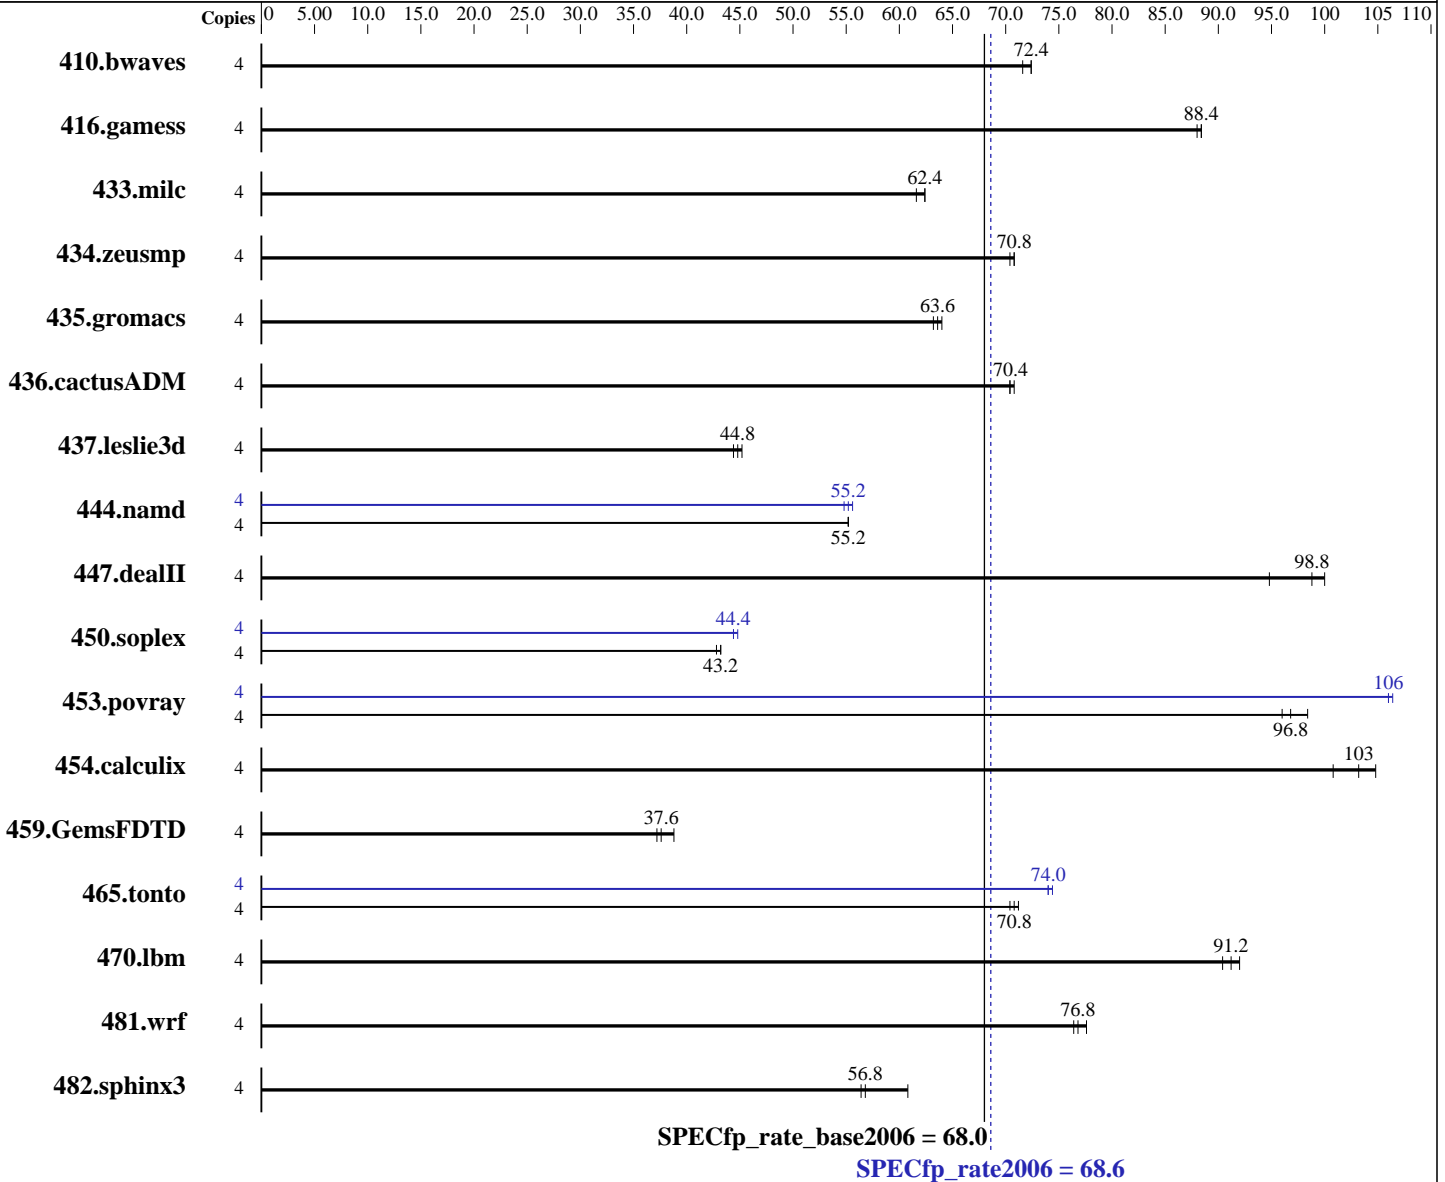

Hardware

CPU Name: AMD A10-7700K
 CPU Characteristics: AMD Turbo CORE technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp_rate2006 = 68.6

SPECfp_rate_base2006 = 68.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

L3 Cache: None
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	749	72.4	759	71.6	<u>751</u>	<u>72.4</u>	4	749	72.4	759	71.6	<u>751</u>	<u>72.4</u>		
416.gamess	4	<u>888</u>	<u>88.4</u>	890	88.0	885	88.4	4	<u>888</u>	<u>88.4</u>	890	88.0	885	88.4		
433.milc	4	587	62.4	595	61.6	<u>588</u>	<u>62.4</u>	4	587	62.4	595	61.6	<u>588</u>	<u>62.4</u>		
434.zeusmp	4	<u>516</u>	<u>70.8</u>	518	70.4	515	70.8	4	<u>516</u>	<u>70.8</u>	518	70.4	515	70.8		
435.gromacs	4	<u>448</u>	<u>63.6</u>	452	63.2	446	64.0	4	<u>448</u>	<u>63.6</u>	452	63.2	446	64.0		
436.cactusADM	4	676	70.8	<u>678</u>	<u>70.4</u>	680	70.4	4	676	70.8	<u>678</u>	<u>70.4</u>	680	70.4		
437.leslie3d	4	<u>837</u>	<u>44.8</u>	835	45.2	847	44.4	4	<u>837</u>	<u>44.8</u>	835	45.2	847	44.4		
444.namd	4	<u>583</u>	<u>55.2</u>	583	55.2	582	55.2	4	577	55.6	<u>579</u>	<u>55.2</u>	587	54.8		
447.dealII	4	458	100	484	94.8	<u>462</u>	<u>98.8</u>	4	458	100	484	94.8	<u>462</u>	<u>98.8</u>		
450.soplex	4	777	42.8	772	43.2	<u>776</u>	<u>43.2</u>	4	<u>748</u>	<u>44.4</u>	752	44.4	744	44.8		
453.povray	4	<u>220</u>	<u>96.8</u>	216	98.4	221	96.0	4	<u>200</u>	<u>106</u>	200	106	201	106		
454.calculix	4	327	101	<u>320</u>	<u>103</u>	314	105	4	327	101	<u>320</u>	<u>103</u>	314	105		
459.GemsFDTD	4	1137	37.2	<u>1125</u>	<u>37.6</u>	1094	38.8	4	1137	37.2	<u>1125</u>	<u>37.6</u>	1094	38.8		
465.tonto	4	<u>556</u>	<u>70.8</u>	551	71.2	559	70.4	4	530	74.4	<u>533</u>	<u>74.0</u>	533	74.0		
470.lbm	4	607	90.4	<u>603</u>	<u>91.2</u>	598	92.0	4	607	90.4	<u>603</u>	<u>91.2</u>	598	92.0		
481.wrf	4	586	76.4	<u>582</u>	<u>76.8</u>	574	77.6	4	586	76.4	<u>582</u>	<u>76.8</u>	574	77.6		
482.sphinx3	4	<u>1375</u>	<u>56.8</u>	1380	56.4	1283	60.8	4	<u>1375</u>	<u>56.8</u>	1380	56.4	1283	60.8		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp_rate2006 = 68.6

SPECfp_rate_base2006 = 68.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on CltD850E6BC6EA4 Tue Jul 1 22:37:04 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model : System Product Name
Processor(s) : 1 Processor(s) Installed.
 [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3400 Mhz
BIOS Version : American Megatrends Inc. 0703, 12/30/2013
Total Physical Memory: 7,106 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 4096
L3CacheSize : 0
MaxClockSpeed : 3400
Name : AMD A10-7700K APU with Radeon(TM) R7 Graphics
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp_rate2006 = 68.6

SPECfp_rate_base2006 = 68.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp_rate2006 = 68.6

SPECfp_rate_base2006 = 68.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECfp_rate2006 = 68.6

SPECfp_rate_base2006 = 68.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F10000000000
           -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:10:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.