



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5600K APU with Radeon HD Graphics)

SPECfp®\_rate2006 = 66.6

SPECfp\_rate\_base2006 = 65.8

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

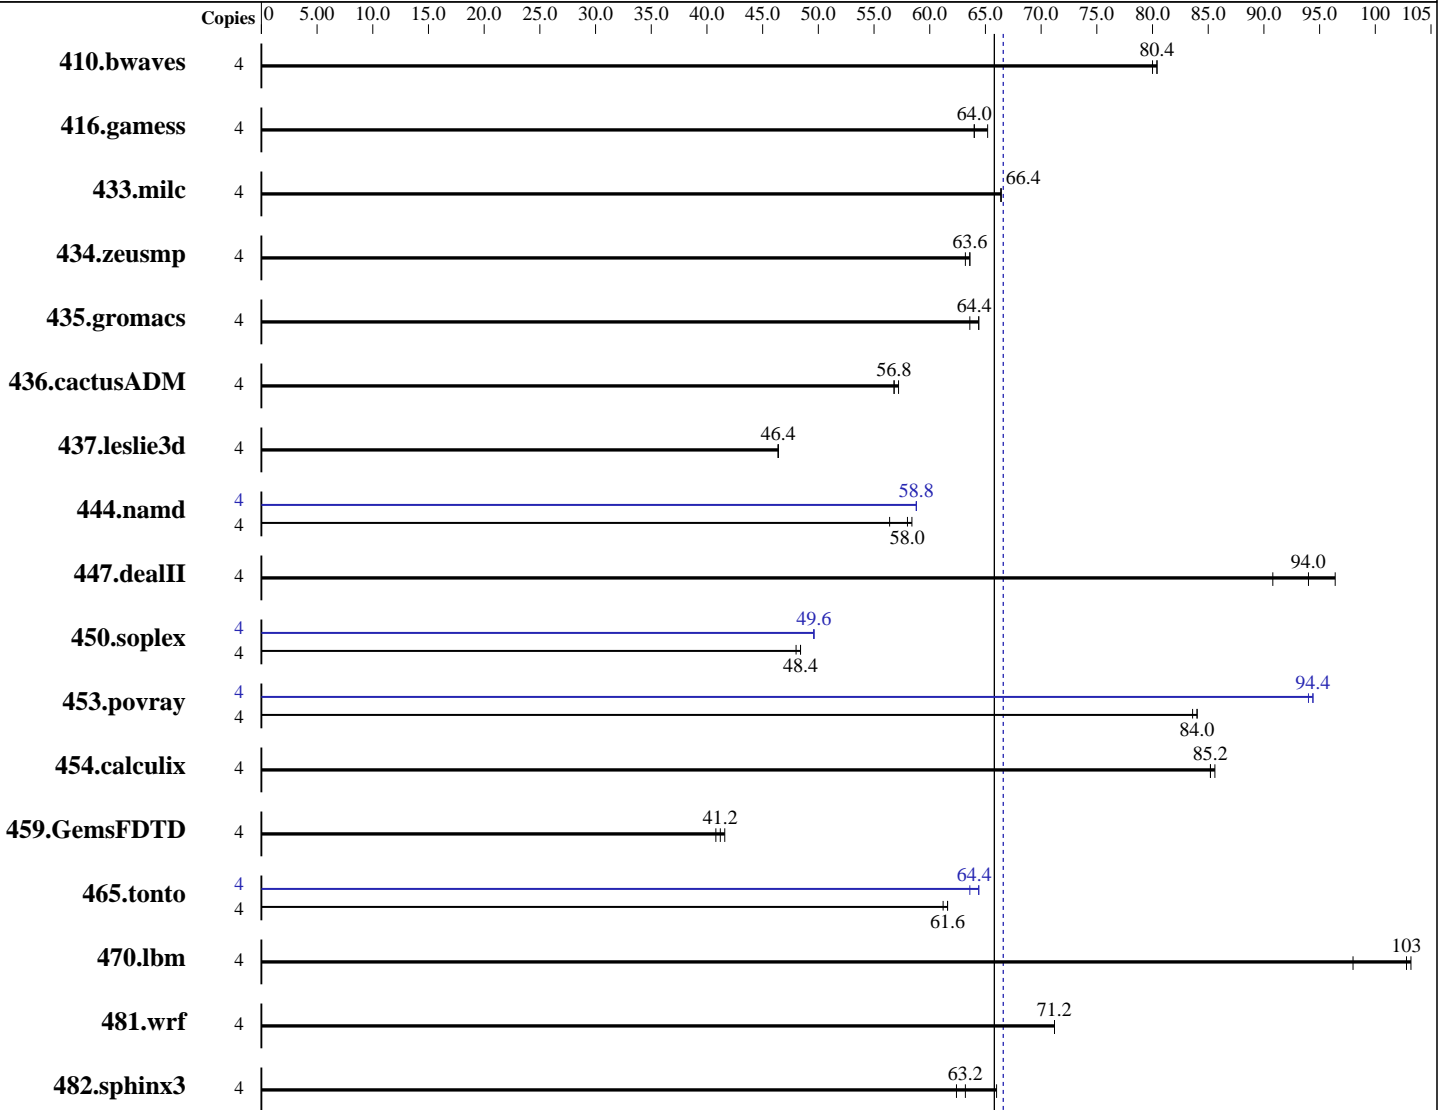

SPECfp\_rate\_base2006 = 65.8

SPECfp\_rate2006 = 66.6

### Hardware

CPU Name: AMD A8-5600K  
 CPU Characteristics: AMD Turbo CORE technology up to 3.90 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

### Software

Operating System: Microsoft Windows 8.1 Pro  
 6.3.9600 N/A Build 9600  
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;  
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: No

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5600K APU with Radeon HD Graphics)

SPECfp\_rate2006 = 66.6

SPECfp\_rate\_base2006 = 65.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)  
Disk Subsystem: 1 TB SATA HDD, 7200 RPM  
Other Hardware: None

File System: NTFS  
System State: Default  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	681	80.0	675	80.4	<b>676</b>	<b>80.4</b>	4	681	80.0	675	80.4	<b>676</b>	<b>80.4</b>
416.gamess	4	1227	64.0	<b>1221</b>	<b>64.0</b>	1204	65.2	4	1227	64.0	<b>1221</b>	<b>64.0</b>	1204	65.2
433.milc	4	552	66.4	553	66.4	<b>552</b>	<b>66.4</b>	4	552	66.4	553	66.4	<b>552</b>	<b>66.4</b>
434.zeusmp	4	576	63.2	<b>572</b>	<b>63.6</b>	571	63.6	4	576	63.2	<b>572</b>	<b>63.6</b>	571	63.6
435.gromacs	4	<b>444</b>	<b>64.4</b>	449	63.6	443	64.4	4	<b>444</b>	<b>64.4</b>	449	63.6	443	64.4
436.cactusADM	4	837	57.2	843	56.8	<b>843</b>	<b>56.8</b>	4	837	57.2	843	56.8	<b>843</b>	<b>56.8</b>
437.leslie3d	4	<b>808</b>	<b>46.4</b>	807	46.4	808	46.4	4	<b>808</b>	<b>46.4</b>	807	46.4	808	46.4
444.namd	4	<b>552</b>	<b>58.0</b>	567	56.4	550	58.4	4	546	58.8	546	58.8	<b>546</b>	<b>58.8</b>
447.dealII	4	474	96.4	503	90.8	<b>487</b>	<b>94.0</b>	4	474	96.4	503	90.8	<b>487</b>	<b>94.0</b>
450.soplex	4	696	48.0	691	48.4	<b>692</b>	<b>48.4</b>	4	<b>673</b>	<b>49.6</b>	670	49.6	673	49.6
453.povray	4	<b>254</b>	<b>84.0</b>	255	83.6	253	84.0	4	<b>226</b>	<b>94.4</b>	226	94.0	225	94.4
454.calculix	4	<b>387</b>	<b>85.2</b>	386	85.6	387	85.2	4	<b>387</b>	<b>85.2</b>	386	85.6	387	85.2
459.GemsFDTD	4	<b>1030</b>	<b>41.2</b>	1043	40.8	1022	41.6	4	<b>1030</b>	<b>41.2</b>	1043	40.8	1022	41.6
465.tonto	4	<b>641</b>	<b>61.6</b>	640	61.6	644	61.2	4	612	64.4	<b>612</b>	<b>64.4</b>	619	63.6
470.lbm	4	<b>536</b>	<b>103</b>	533	103	562	98.0	4	<b>536</b>	<b>103</b>	533	103	562	98.0
481.wrf	4	628	71.2	<b>628</b>	<b>71.2</b>	628	71.2	4	628	71.2	<b>628</b>	<b>71.2</b>	628	71.2
482.sphinx3	4	1183	66.0	1249	62.4	<b>1232</b>	<b>63.2</b>	4	1183	66.0	1249	62.4	<b>1232</b>	<b>63.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:  
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5600K APU with Radeon HD Graphics)

**SPECfp\_rate2006 = 66.6**

**SPECfp\_rate\_base2006 = 65.8**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jul-2014

**Hardware Availability:** Aug-2013

**Software Availability:** Oct-2013

## Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt50465D8B9365 Wed Jul 2 00:18:14 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro  
OS Version : 6.3.9600 N/A Build 9600  
System Manufacturer: System manufacturer  
System Model : System Product Name  
Processor(s) : 1 Processor(s) Installed.  
 [01]: AMD64 Family 21 Model 16 Stepping 1 AuthenticAMD ~3600 Mhz  
BIOS Version : American Megatrends Inc. 6303, 8/13/2013  
Total Physical Memory: 7,366 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0  
L2CacheSize : 4096  
L3CacheSize : 0  
MaxClockSpeed : 3600  
Name : AMD A8-5600K APU with Radeon(tm) HD Graphics  
NumberOfCores : 2  
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5600K APU with Radeon HD Graphics)

**SPECfp\_rate2006 = 66.6**

**SPECfp\_rate\_base2006 = 65.8**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jul-2014

**Hardware Availability:** Aug-2013

**Software Availability:** Oct-2013

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64  
 416.gamess: -DSPEC\_CPU\_P64  
 433.milc: -DSPEC\_CPU\_P64  
 434.zeusmp: -DSPEC\_CPU\_P64  
 435.gromacs: -DSPEC\_CPU\_P64  
 436.cactusADM: -DSPEC\_CPU\_P64 /names:lowercase /assume:underscore  
 437.leslie3d: -DSPEC\_CPU\_P64  
 444.namd: -DSPEC\_CPU\_P64 /TP  
 447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
 -Qoption,cpp,--ms\_incompat\_treatment\_of\_commas\_in\_macros  
 450.soplex: -DSPEC\_CPU\_P64  
 453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NEED\_INVHYP -DNEED\_INVHYP  
 454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER /names:lowercase  
 459.GemsFDTD: -DSPEC\_CPU\_P64  
 465.tonto: -DSPEC\_CPU\_P64  
 470.lbm: -DSPEC\_CPU\_P64  
 481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
 482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5600K APU with Radeon HD Graphics)

SPECfp\_rate2006 = 66.6

SPECfp\_rate\_base2006 = 65.8

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

## Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000  
shlW64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib  
-link /FORCE:MULTIPLE

453.povray: /arch:AVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32  
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-5600K APU with Radeon HD Graphics)

**SPECfp\_rate2006 = 66.6**

**SPECfp\_rate\_base2006 = 65.8**

**CPU2006 license:** 13

**Test sponsor:** Intel Corporation

**Tested by:** Intel Corporation

**Test date:** Jul-2014

**Hardware Availability:** Aug-2013

**Software Availability:** Oct-2013

## Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F10000000000
           -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Aug 12 15:02:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 August 2014.