



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 558

Huawei CH220 (Intel Xeon E5-2650 v2)

SPECfp_rate_base2006 = 545

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

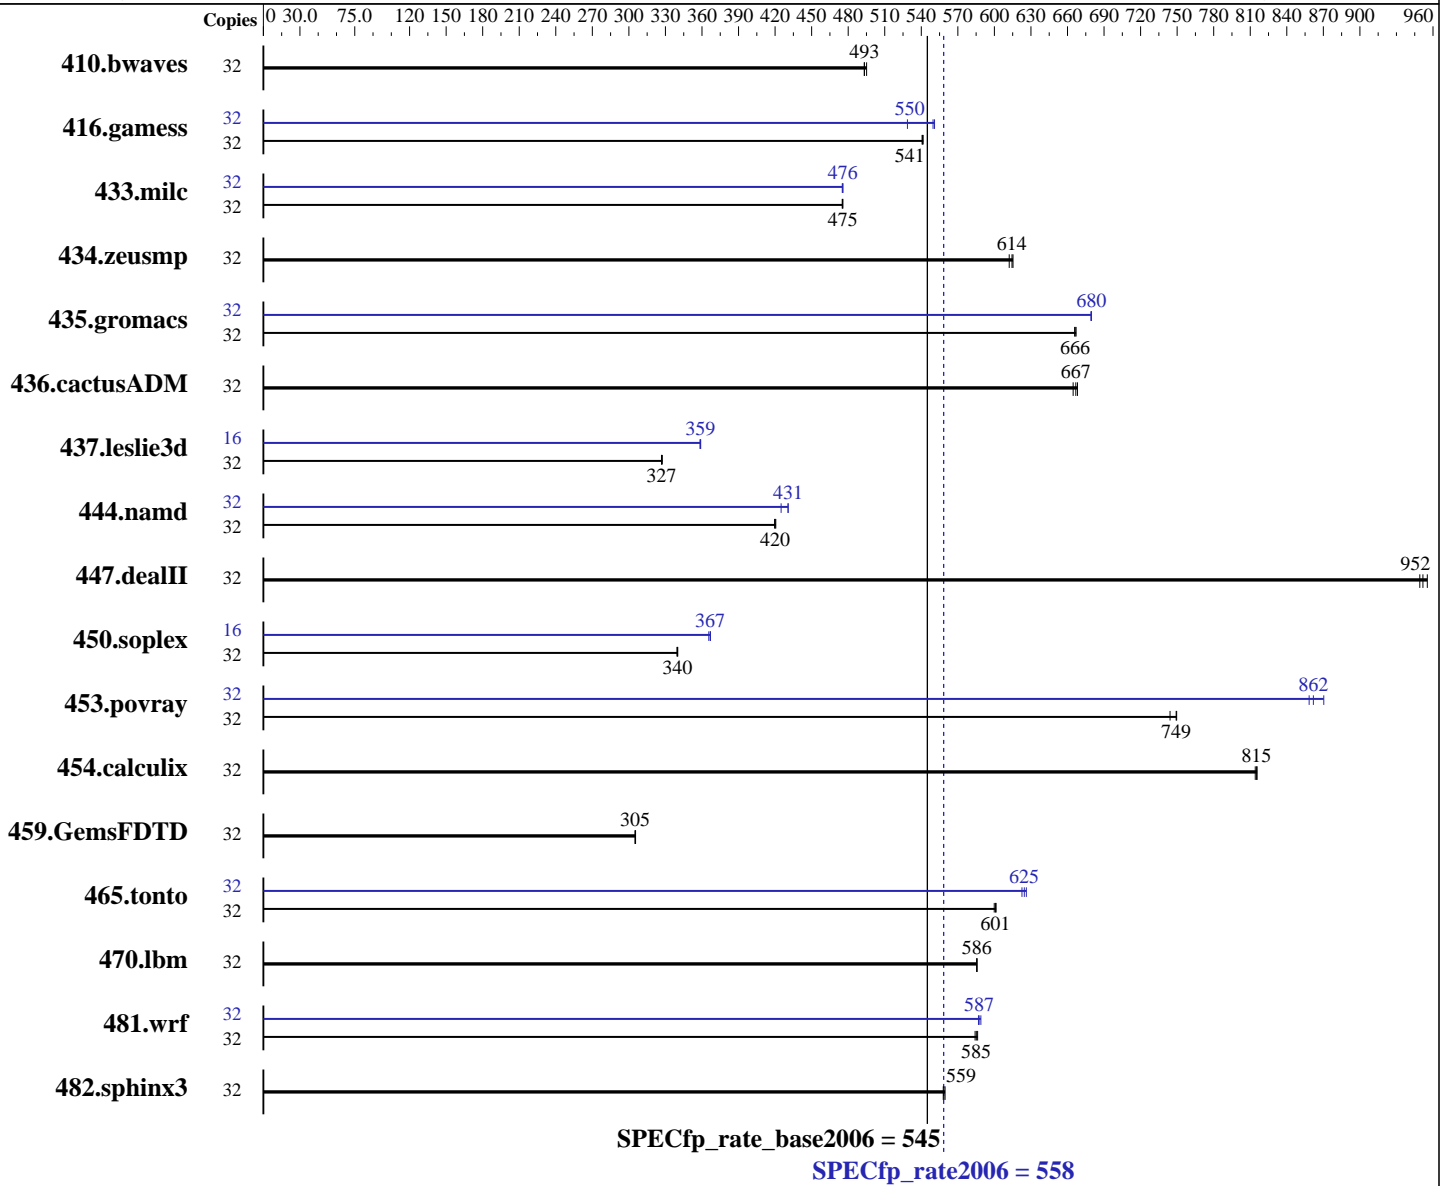

Hardware

CPU Name: Intel Xeon E5-2650 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = **558**

Huawei CH220 (Intel Xeon E5-2650 v2)

SPECfp_rate_base2006 = **545**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 300 GB SATA, 7200RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	878	495	882	493	882	493	32	878	495	882	493	882	493
416.gamess	32	1158	541	1159	541	1157	542	32	1140	550	1137	551	1185	529
433.milc	32	618	475	618	476	618	475	32	618	476	618	475	618	476
434.zeusmp	32	473	615	474	614	476	612	32	473	615	474	614	476	612
435.gromacs	32	343	667	343	666	343	666	32	336	679	336	680	336	680
436.cactusADM	32	573	667	575	665	572	668	32	573	667	575	665	572	668
437.leslie3d	32	921	327	920	327	919	327	16	420	358	419	359	419	359
444.namd	32	612	420	611	420	610	421	32	596	431	596	431	604	425
447.dealII	32	383	955	386	949	385	952	32	383	955	386	949	385	952
450.soplex	32	785	340	785	340	786	339	16	364	367	364	367	365	366
453.povray	32	227	749	229	744	227	750	32	198	858	198	862	196	870
454.calculix	32	324	816	324	814	324	815	32	324	816	324	814	324	815
459.GemsFDTD	32	1112	305	1113	305	1111	305	32	1112	305	1113	305	1111	305
465.tonto	32	524	601	524	601	525	600	32	504	625	503	626	506	623
470.lbm	32	751	586	751	586	751	586	32	751	586	751	586	751	586
481.wrf	32	611	585	612	584	610	586	32	609	587	608	587	607	589
482.sphinx3	32	1117	559	1118	558	1115	560	32	1117	559	1118	558	1115	560

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /spec14/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Fri Sep 5 00:25:05 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 558

Huawei CH220 (Intel Xeon E5-2650 v2)

SPECfp_rate_base2006 = 545

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
 2 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal: 264480104 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 4 13:10

SPEC is set to: /spec14

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  265G  47G  205G  19% /
```

Additional information from dmidecode:

BIOS Insyde Corp. OARYV388 04/23/2014

Memory:

```
16x Micron 36JSF2G72PZ-1G9E1 16 GB 1866 MHz 2 rank
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 558

Huawei CH220 (Intel Xeon E5-2650 v2)

SPECfp_rate_base2006 = 545

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 558

Huawei CH220 (Intel Xeon E5-2650 v2)

SPECfp_rate_base2006 = 545

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 558

Huawei CH220 (Intel Xeon E5-2650 v2)

SPECfp_rate_base2006 = 545

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 558

Huawei CH220 (Intel Xeon E5-2650 v2)

SPECfp_rate_base2006 = 545

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 14 13:26:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 October 2014.