



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECfp<sup>®</sup>2006 = 61.5**

**SPECfp\_base2006 = 59.2**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Mar-2014

Software Availability: May-2014

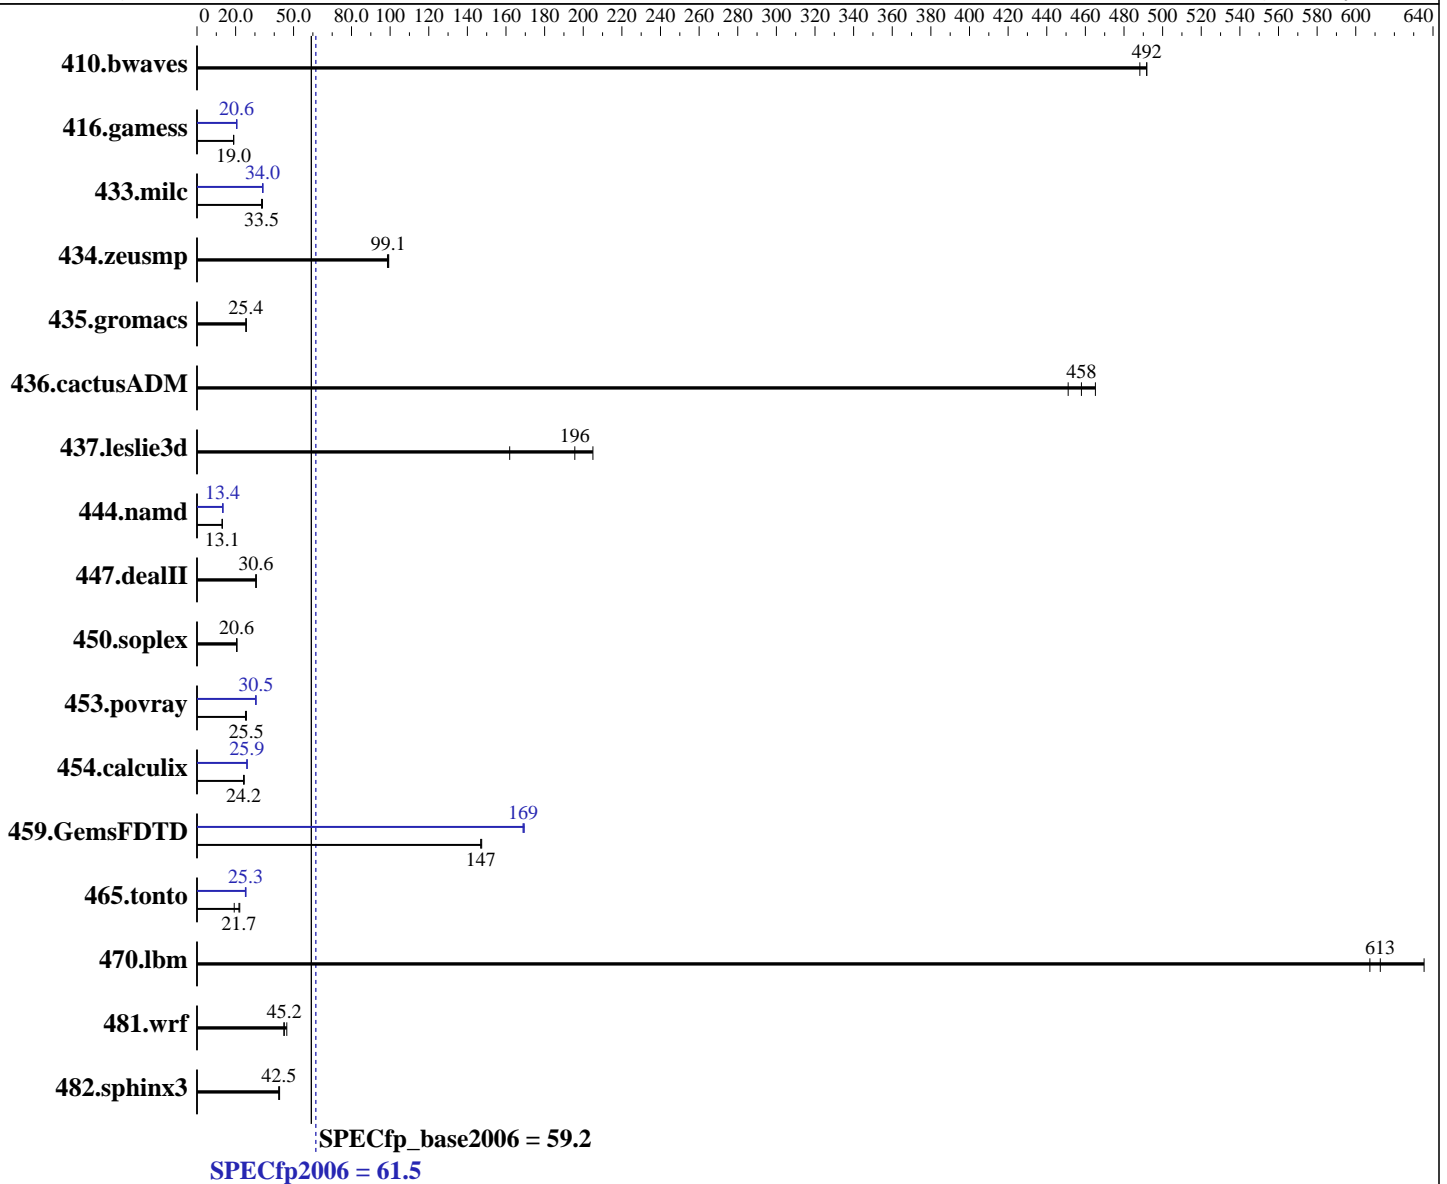

Hardware		Software	
CPU Name:	Intel Xeon E7-4809 v2	Operating System:	SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
CPU Characteristics:		Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
CPU MHz:	1900	Auto Parallel:	Yes
FPU:	Integrated	File System:	ext2
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	2,4 chip		
Primary Cache:	32 KB I + 32 KB D on chip per core		
Secondary Cache:	256 KB I+D on chip per core		

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

SPECfp2006 = **61.5**

SPECfp\_base2006 = **59.2**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2014

Hardware Availability: Mar-2014

Software Availability: May-2014

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 400 GB SAS SSD SSD  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	27.6	492	<b>27.6</b>	<b>492</b>	27.8	488	27.6	492	<b>27.6</b>	<b>492</b>	27.8	488
416.gamess	<b>1032</b>	<b>19.0</b>	1034	18.9	1030	19.0	950	20.6	<b>952</b>	<b>20.6</b>	952	20.6
433.milc	<b>274</b>	<b>33.5</b>	271	33.9	274	33.5	<b>270</b>	<b>34.0</b>	270	34.0	269	34.2
434.zeusmp	91.7	99.3	92.3	98.6	<b>91.9</b>	<b>99.1</b>	91.7	99.3	92.3	98.6	<b>91.9</b>	<b>99.1</b>
435.gromacs	282	25.4	280	25.5	<b>281</b>	<b>25.4</b>	282	25.4	280	25.5	<b>281</b>	<b>25.4</b>
436.cactusADM	26.5	451	25.7	465	<b>26.1</b>	<b>458</b>	26.5	451	25.7	465	<b>26.1</b>	<b>458</b>
437.leslie3d	58.1	162	45.9	205	<b>48.0</b>	<b>196</b>	58.1	162	45.9	205	<b>48.0</b>	<b>196</b>
444.namd	<b>614</b>	<b>13.1</b>	613	13.1	614	13.1	600	13.4	<b>600</b>	<b>13.4</b>	598	13.4
447.dealII	376	30.4	373	30.7	<b>374</b>	<b>30.6</b>	376	30.4	373	30.7	<b>374</b>	<b>30.6</b>
450.soplex	<b>405</b>	<b>20.6</b>	405	20.6	405	20.6	<b>405</b>	<b>20.6</b>	405	20.6	405	20.6
453.povray	<b>209</b>	<b>25.5</b>	212	25.1	208	25.6	174	30.6	175	30.4	<b>175</b>	<b>30.5</b>
454.calculix	<b>341</b>	<b>24.2</b>	342	24.1	337	24.5	318	25.9	319	25.9	<b>318</b>	<b>25.9</b>
459.GemsFDTD	72.2	147	72.0	147	<b>72.2</b>	<b>147</b>	<b>62.8</b>	<b>169</b>	62.8	169	62.6	169
465.tonto	510	19.3	444	22.1	<b>453</b>	<b>21.7</b>	389	25.3	393	25.1	<b>389</b>	<b>25.3</b>
470.lbm	22.6	607	21.6	635	<b>22.4</b>	<b>613</b>	22.6	607	21.6	635	<b>22.4</b>	<b>613</b>
481.wrf	<b>247</b>	<b>45.2</b>	240	46.5	248	45.0	<b>247</b>	<b>45.2</b>	240	46.5	248	45.0
482.sphinx3	460	42.4	456	42.8	<b>459</b>	<b>42.5</b>	460	42.4	456	42.8	<b>459</b>	<b>42.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
 Virtualization Technology disabled  
 Execute Disable disabled  
 System Profile set to Custom  
 CPU Power Management set to Maximum Performance  
 Memory Patrol Scrub set to disabled  
 ClE set to enabled  
 C States set to enabled  
 Sysinfo program

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 61.5**

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECfp\_base2006 = 59.2**

**CPU2006 license:** 55

**Test date:** Sep-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** May-2014

## Platform Notes (Continued)

```
/root/Desktop/Performance/ic14.0_Oct17_2013/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on slesperf3 Mon Sep 1 23:45:31 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4809 v2 @ 1.90GHz
 4 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
physical 2: cores 0 1 2 3 4 5
physical 3: cores 0 1 2 3 4 5
cache size : 12288 KB
```

```
From /proc/meminfo
MemTotal: 1058789108 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux slesperf3 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 1 16:01 last=S
```

```
SPEC is set to: /root/Desktop/Performance/ic14.0_Oct17_2013
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext2 365G 255G 109G 71% /
```

```
Additional information from dmidecode:
BIOS Dell Inc. 1.2.2 05/05/2014
Memory:
64x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1066 MHz
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 61.5**

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECfp\_base2006 = 59.2**

**CPU2006 license:** 55

**Test date:** Sep-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** May-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/Desktop/Performance/icl4.0\_Oct17\_2013/libs/32:/root/Desktop/Performance/icl4.0\_Oct17\_2013/libs/64:/root/Desktop/Performance/icl4.0\_Oct17\_2013/sh"

OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECfp2006 = 61.5**

**SPECfp\_base2006 = 59.2**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2014

**Hardware Availability:** Mar-2014

**Software Availability:** May-2014

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 61.5**

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECfp\_base2006 = 59.2**

**CPU2006 license:** 55

**Test date:** Sep-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** May-2014

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R920 (Intel Xeon E7-4809 v2, 1.90 GHz)

**SPECfp2006 = 61.5**

**SPECfp\_base2006 = 59.2**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Sep-2014

**Hardware Availability:** Mar-2014

**Software Availability:** May-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Oct 8 19:41:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 October 2014.