



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P, Intel Xeon E5-2695 v3)

**SPECint®\_rate2006 = 1130**

**SPECint\_rate\_base2006 = 1080**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

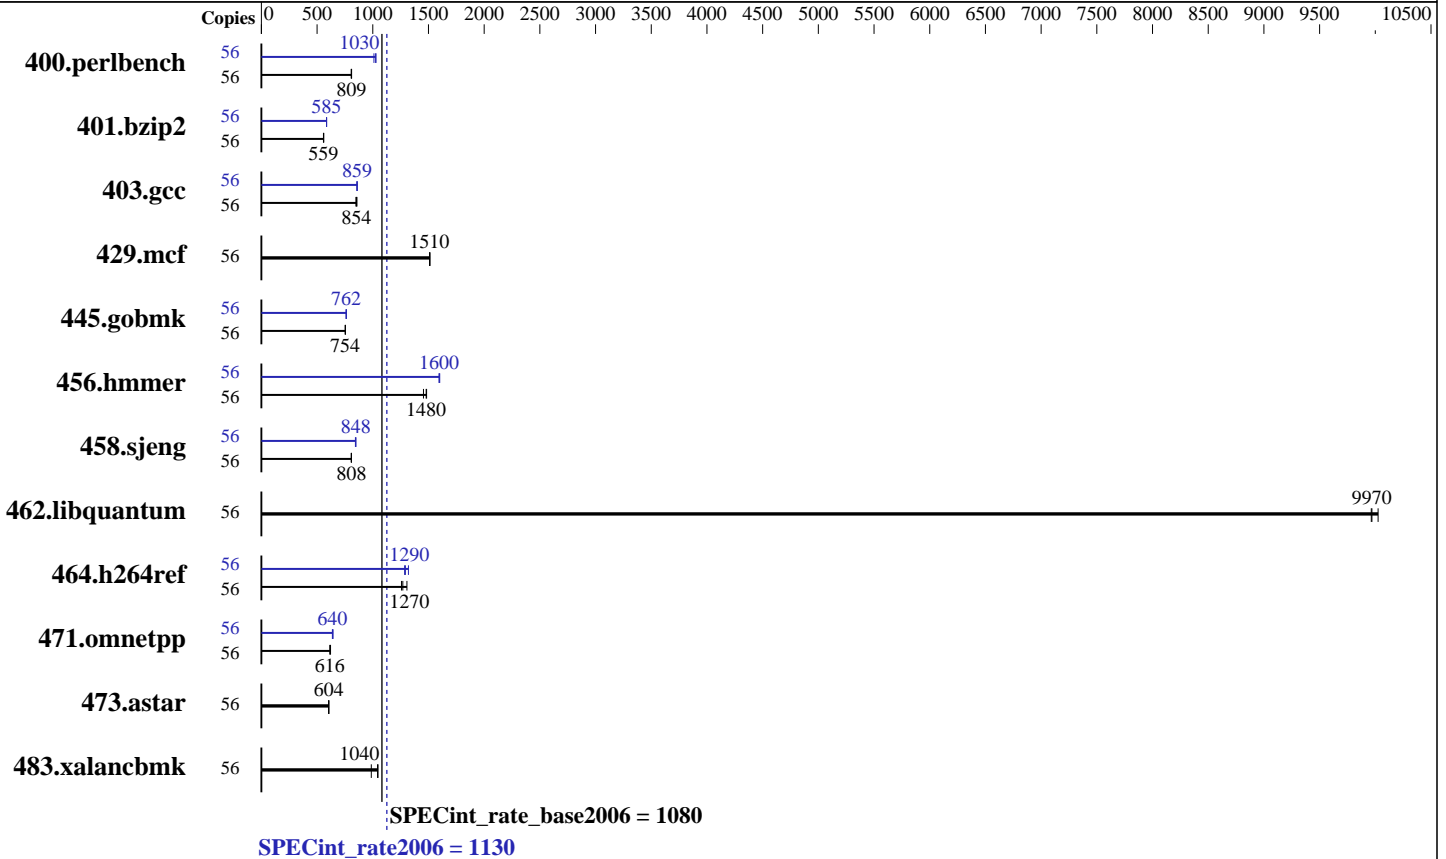

### Hardware

CPU Name: Intel Xeon E5-2695 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P, Intel Xeon E5-2695 v3)

SPECint\_rate2006 = 1130

SPECint\_rate\_base2006 = 1080

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	<b>677</b>	<b>809</b>	675	810	678	806	56	532	1030	541	1010	<b>533</b>	<b>1030</b>
401.bzip2	56	966	559	970	557	<b>967</b>	<b>559</b>	56	924	585	923	586	<b>924</b>	<b>585</b>
403.gcc	56	<b>528</b>	<b>854</b>	531	849	526	858	56	526	857	524	861	<b>525</b>	<b>859</b>
429.mcf	56	<b>338</b>	<b>1510</b>	338	1510	337	1510	56	<b>338</b>	<b>1510</b>	338	1510	337	1510
445.gobmk	56	780	754	779	754	<b>779</b>	<b>754</b>	56	<b>771</b>	<b>762</b>	772	761	770	763
456.hammer	56	<b>353</b>	<b>1480</b>	359	1460	352	1480	56	<b>327</b>	<b>1600</b>	327	1600	326	1600
458.sjeng	56	<b>838</b>	<b>808</b>	838	809	840	807	56	803	844	<b>799</b>	<b>848</b>	799	848
462.libquantum	56	116	10000	<b>116</b>	<b>9970</b>	116	9960	56	116	10000	<b>116</b>	<b>9970</b>	116	9960
464.h264ref	56	<b>976</b>	<b>1270</b>	948	1310	985	1260	56	964	1290	<b>958</b>	<b>1290</b>	939	1320
471.omnetpp	56	569	616	564	621	<b>568</b>	<b>616</b>	56	<b>547</b>	<b>640</b>	544	643	549	637
473.astar	56	649	605	651	604	<b>650</b>	<b>604</b>	56	649	605	651	604	<b>650</b>	<b>604</b>
483.xalancbmk	56	392	987	<b>371</b>	<b>1040</b>	369	1050	56	392	987	<b>371</b>	<b>1040</b>	369	1050

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Early Snoop = Disable  
Enforce POR = Disable  
COD Enable = Enable

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/Trial/SPEC2006\_v11/libs/32:/home/Trial/SPEC2006\_v11/libs/64:/home/Trial/SPEC2006\_v11/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P, Intel Xeon E5-2695 v3)

SPECint\_rate2006 = 1130

SPECint\_rate\_base2006 = 1080

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2014  
Hardware Availability: Sep-2014  
Software Availability: Sep-2014

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32  
C++ benchmarks:  
icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32  
400.perlbench: icc -m64  
401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2695 v3)

SPECint\_rate2006 = 1130

SPECint\_rate\_base2006 = 1080

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2014  
Hardware Availability: Sep-2014  
Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmr: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3`

456.hmmr: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028TP-HTR  
(X10DRT-P , Intel Xeon E5-2695 v3)

SPECint\_rate2006 = 1130

SPECint\_rate\_base2006 = 1080

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2014  
Hardware Availability: Sep-2014  
Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Nov 12 10:06:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 November 2014.