



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028UX-TR4
(X10DRU-X , Intel Xeon E5-2699 v3)

SPECint®_rate2006 = 1460

SPECint_rate_base2006 = 1420

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Oct-2014

Software Availability: Sep-2013

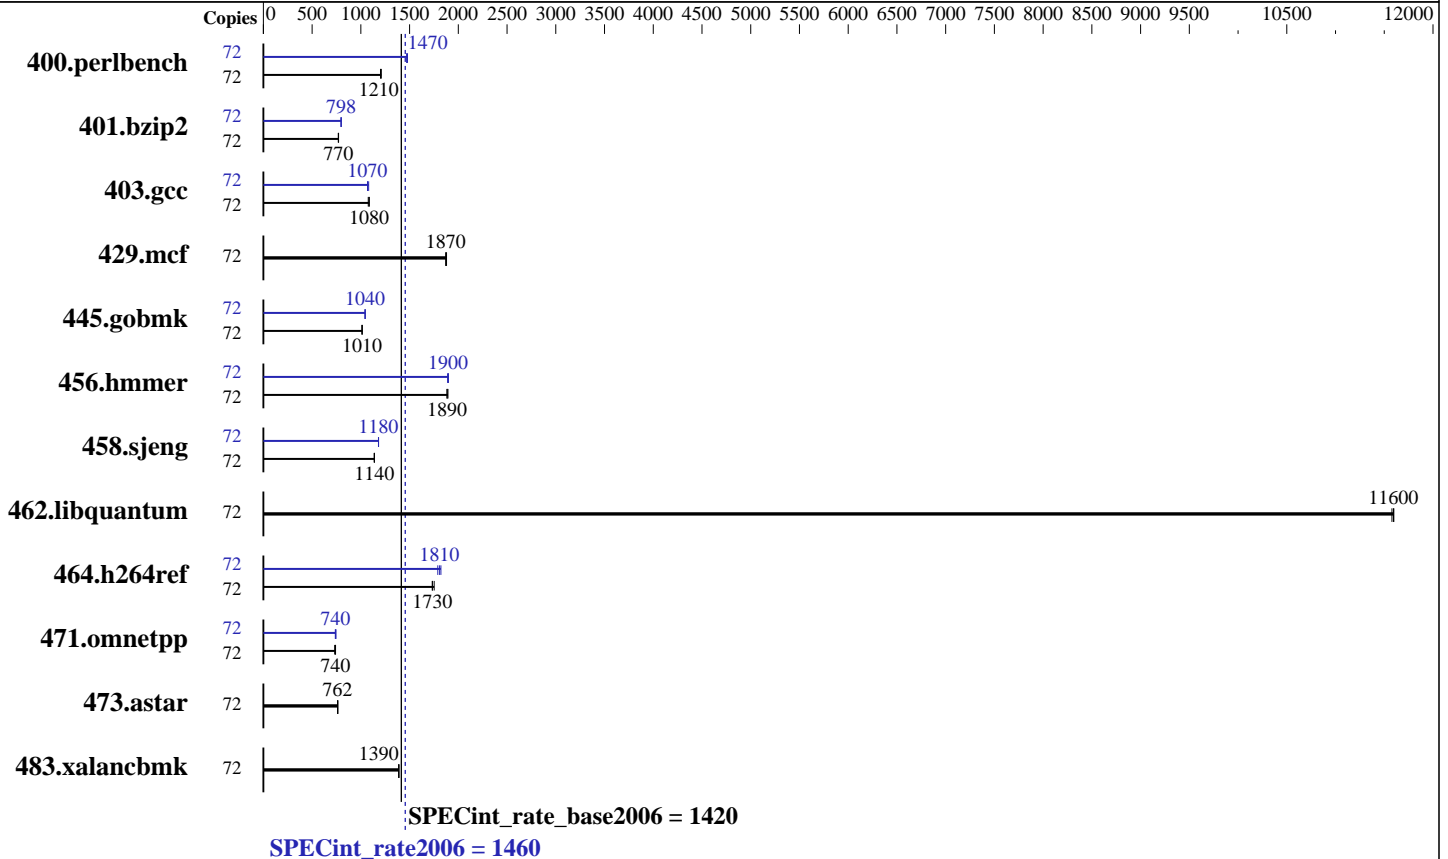

Hardware

CPU Name: Intel Xeon E5-2699 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 1 TB SATA III, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5, Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028UX-TR4
(X10DRU-X , Intel Xeon E5-2699 v3)

SPECint_rate2006 = 1460

SPECint_rate_base2006 = 1420

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2014
Hardware Availability: Oct-2014
Software Availability: Sep-2013

Results Table

| Benchmark | Base | | | | | | Peak | | | | | | | |
|----------------|--------|------------|-------------|------------|-------------|------------|--------------|--------|------------|-------------|------------|-------------|------------|--------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 72 | 582 | 1210 | <u>583</u> | <u>1210</u> | 585 | 1200 | 72 | 478 | 1470 | 476 | 1480 | <u>478</u> | <u>1470</u> |
| 401.bzip2 | 72 | <u>902</u> | <u>770</u> | 901 | 771 | 904 | 769 | 72 | <u>870</u> | <u>798</u> | 872 | 797 | 870 | 798 |
| 403.gcc | 72 | 534 | 1090 | 539 | 1080 | <u>535</u> | <u>1080</u> | 72 | 542 | 1070 | 537 | 1080 | <u>542</u> | <u>1070</u> |
| 429.mcf | 72 | 351 | 1870 | <u>350</u> | <u>1870</u> | 349 | 1880 | 72 | 351 | 1870 | <u>350</u> | <u>1870</u> | 349 | 1880 |
| 445.gobmk | 72 | 745 | 1010 | 746 | 1010 | <u>746</u> | <u>1010</u> | 72 | <u>723</u> | <u>1040</u> | 723 | 1040 | 724 | 1040 |
| 456.hammer | 72 | 357 | 1880 | 355 | 1890 | <u>356</u> | <u>1890</u> | 72 | 354 | 1900 | <u>354</u> | <u>1900</u> | 355 | 1890 |
| 458.sjeng | 72 | 766 | 1140 | 764 | 1140 | <u>765</u> | <u>1140</u> | 72 | 737 | 1180 | 738 | 1180 | <u>737</u> | <u>1180</u> |
| 462.libquantum | 72 | 129 | 11600 | 129 | 11600 | <u>129</u> | <u>11600</u> | 72 | 129 | 11600 | 129 | 11600 | <u>129</u> | <u>11600</u> |
| 464.h264ref | 72 | 909 | 1750 | 919 | 1730 | <u>919</u> | <u>1730</u> | 72 | 875 | 1820 | <u>881</u> | <u>1810</u> | 890 | 1790 |
| 471.omnetpp | 72 | 608 | 740 | <u>608</u> | <u>740</u> | 615 | 731 | 72 | 610 | 738 | <u>608</u> | <u>740</u> | 604 | 745 |
| 473.astar | 72 | <u>663</u> | <u>762</u> | 664 | 761 | 661 | 765 | 72 | <u>663</u> | <u>762</u> | 664 | 761 | 661 | 765 |
| 483.xalancbmk | 72 | <u>358</u> | <u>1390</u> | 357 | 1390 | 358 | 1390 | 72 | <u>358</u> | <u>1390</u> | 357 | 1390 | 358 | 1390 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Enforce POR - Disable
Memory Frequency - 2133
Enable COD - Enable
Early Snoop - Disable
SMC Performance Tuning - Profile #1
Sysinfo program /root/cpu2006/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on 192-248.hnet Thu Oct 16 16:26:21 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
2 "physical id"s (chips)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028UX-TR4
(X10DRU-X , Intel Xeon E5-2699 v3)

SPECint_rate2006 = 1460

SPECint_rate_base2006 = 1420

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2014
Hardware Availability: Oct-2014
Software Availability: Sep-2013

Platform Notes (Continued)

72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

```
From /proc/meminfo
MemTotal:      264417452 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux 192-248.hnet 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 16 16:25
```

```
SPEC is set to: /root/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  673G  178G  461G  28% /
```

```
Additional information from dmidecode:
BIOS American Megatrends Inc. 1.00 10/14/2014
Memory:
16x 16 GB
8x Samsung (date:13/5p) M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
8x Samsung (date:14/16) M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)
System has 16x 16GB Samsung memory modules installed running at 2133 MHz

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028UX-TR4
(X10DRU-X , Intel Xeon E5-2699 v3)

SPECint_rate2006 = 1460

SPECint_rate_base2006 = 1420

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2014
Hardware Availability: Oct-2014
Software Availability: Sep-2013

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028UX-TR4
(X10DRU-X , Intel Xeon E5-2699 v3)

SPECint_rate2006 = 1460

SPECint_rate_base2006 = 1420

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2014
Hardware Availability: Oct-2014
Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028UX-TR4
(X10DRU-X , Intel Xeon E5-2699 v3)

SPECint_rate2006 = 1460

SPECint_rate_base2006 = 1420

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2014
Hardware Availability: Oct-2014
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.20141106.html>
<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.20141106.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Nov 6 13:48:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 November 2014.