



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp®2006 = 110**

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECfp\_base2006 = 105**

CPU2006 license: 3


Test date: Nov-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

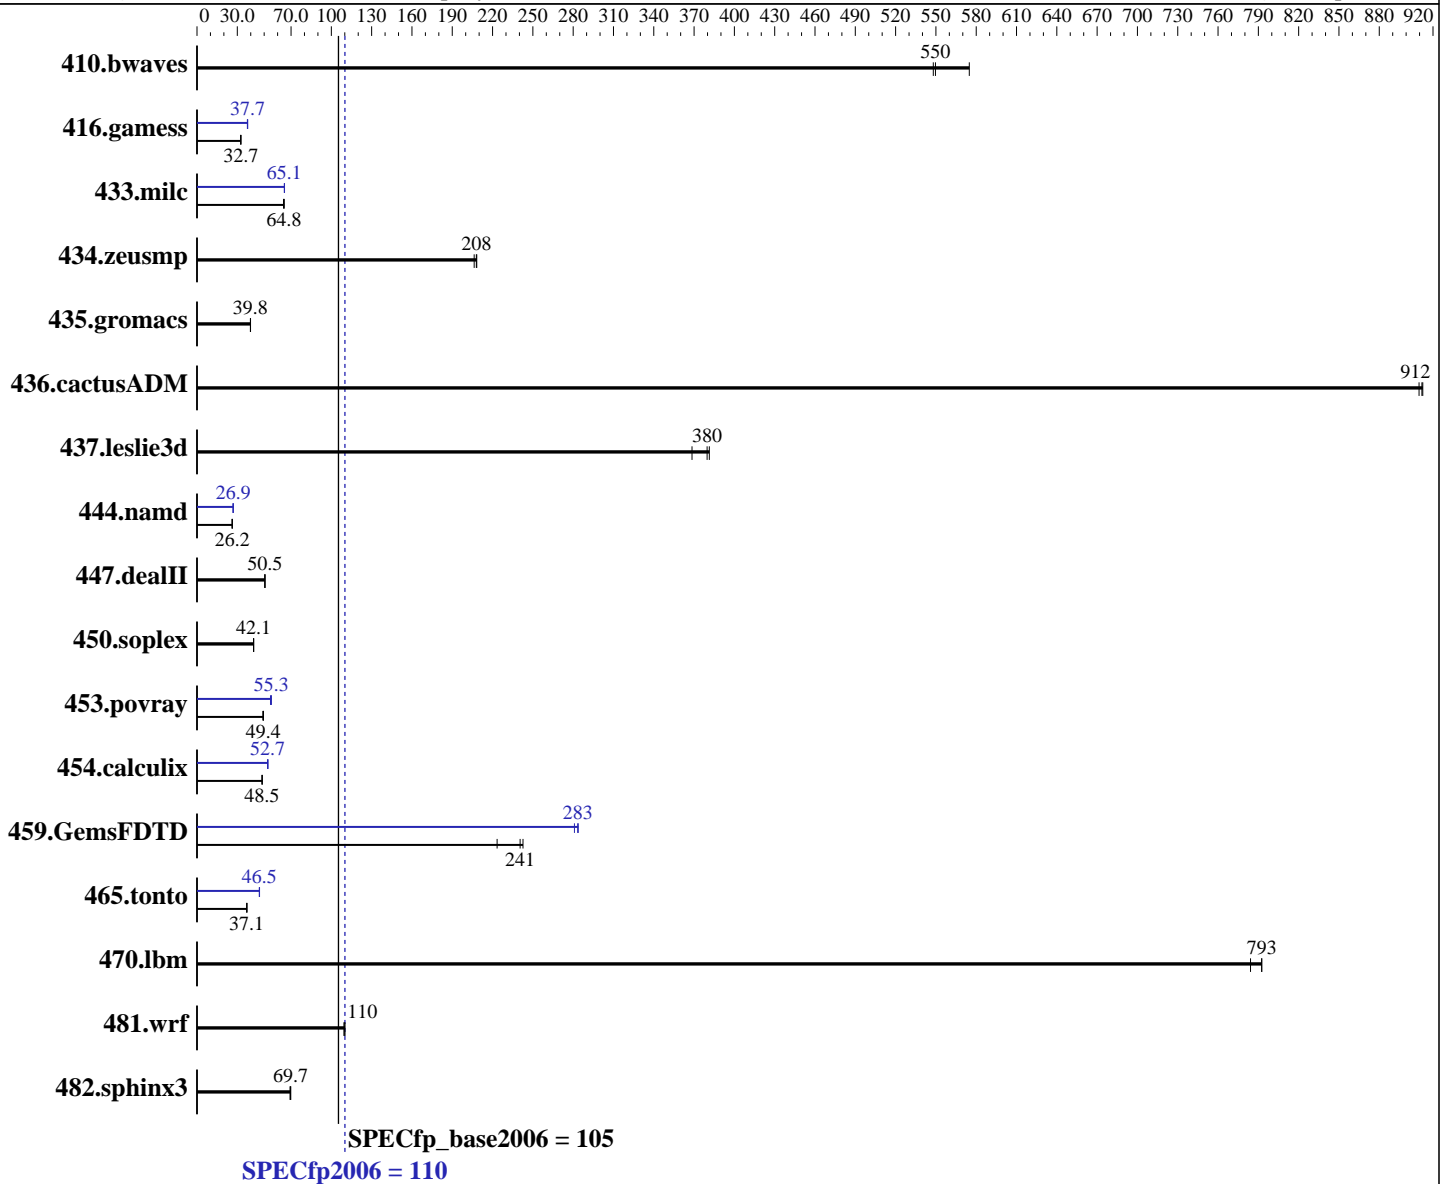

### Hardware

CPU Name: Intel Xeon E5-2670 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **110**

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

SPECfp\_base2006 = **105**

CPU2006 license: 3

Test date: Nov-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 400 GB SSD SAS, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	23.6	575	<b><u>24.7</u></b>	<b><u>550</u></b>	24.8	548	23.6	575	<b><u>24.7</u></b>	<b><u>550</u></b>	24.8	548
416.gamess	<b><u>600</u></b>	<b><u>32.7</u></b>	603	32.5	599	32.7	522	37.5	<b><u>520</u></b>	<b><u>37.7</u></b>	519	37.7
433.milc	143	64.4	<b><u>142</u></b>	<b><u>64.8</u></b>	142	64.8	141	65.0	<b><u>141</u></b>	<b><u>65.1</u></b>	141	65.1
434.zeusmp	44.1	206	<b><u>43.8</u></b>	<b><u>208</u></b>	43.7	208	44.1	206	<b><u>43.8</u></b>	<b><u>208</u></b>	43.7	208
435.gromacs	179	39.8	180	39.8	<b><u>179</u></b>	<b><u>39.8</u></b>	179	39.8	180	39.8	<b><u>179</u></b>	<b><u>39.8</u></b>
436.cactusADM	13.1	912	13.1	910	<b><u>13.1</u></b>	<b><u>912</u></b>	13.1	912	13.1	910	<b><u>13.1</u></b>	<b><u>912</u></b>
437.leslie3d	<b><u>24.8</u></b>	<b><u>380</u></b>	24.7	381	25.5	368	<b><u>24.8</u></b>	<b><u>380</u></b>	24.7	381	25.5	368
444.namd	306	26.2	306	26.2	<b><u>306</u></b>	<b><u>26.2</u></b>	298	26.9	<b><u>298</u></b>	<b><u>26.9</u></b>	298	26.9
447.dealII	<b><u>226</u></b>	<b><u>50.5</u></b>	226	50.5	226	50.6	<b><u>226</u></b>	<b><u>50.5</u></b>	226	50.5	226	50.6
450.soplex	198	42.2	<b><u>198</u></b>	<b><u>42.1</u></b>	198	42.1	198	42.2	<b><u>198</u></b>	<b><u>42.1</u></b>	198	42.1
453.povray	108	49.5	109	49.0	<b><u>108</u></b>	<b><u>49.4</u></b>	<b><u>96.3</u></b>	<b><u>55.3</u></b>	97.3	54.7	96.2	55.3
454.calculix	170	48.5	<b><u>170</u></b>	<b><u>48.5</u></b>	170	48.4	156	52.8	157	52.5	<b><u>157</u></b>	<b><u>52.7</u></b>
459.GemsFDTD	<b><u>44.1</u></b>	<b><u>241</u></b>	47.5	223	43.7	243	37.8	281	37.4	284	<b><u>37.4</u></b>	<b><u>283</u></b>
465.tonto	266	37.1	265	37.1	<b><u>265</u></b>	<b><u>37.1</u></b>	<b><u>212</u></b>	<b><u>46.5</u></b>	212	46.4	211	46.6
470.lbm	17.5	784	17.3	793	<b><u>17.3</u></b>	<b><u>793</u></b>	17.5	784	17.3	793	<b><u>17.3</u></b>	<b><u>793</u></b>
481.wrf	102	110	101	110	<b><u>102</u></b>	<b><u>110</u></b>	102	110	101	110	<b><u>102</u></b>	<b><u>110</u></b>
482.sphinx3	281	69.2	279	69.8	<b><u>280</u></b>	<b><u>69.7</u></b>	281	69.2	279	69.8	<b><u>280</u></b>	<b><u>69.7</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
HP Power Regulator to HP Static High Performance Mode  
Minimum Processor Idle Power Core State set to C6 State  
Minimum Processor Idle Power Package State set to Package C6 (non-retention) State  
QPI Snoop Configuration set to Home Snoop  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **110**

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

SPECfp\_base2006 = **105**

CPU2006 license: 3

Test date: Nov-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

### Platform Notes (Continued)

Processor Power and Utilization Monitoring set to Disabled  
Memory Double Refresh Rate set to 1x Refresh  
Intel Hyperthreading Technology set to Disabled

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Mon Nov 3 02:58:38 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2670 v3 @ 2.30GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 12
  siblings    : 12
  physical 0   : cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1   : cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size     : 30720 KB
```

```
From /proc/meminfo
MemTotal:      263845892 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 3 02:47
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 110**

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECfp\_base2006 = 105**

**CPU2006 license:** 3

**Test date:** Nov-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Platform Notes (Continued)

/dev/mapper/rhel-home xfs 318G 154G 165G 49% /home  
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P89 07/11/2014

Memory:

8x HP 752369-081 16 GB 2 rank 2133 MHz  
8x HP NOT AVAILABLE 16 GB 2 rank 2133 MHz  
8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have two lines reading as:

8x HP 752369-081 16 GB 2 rank 2133 MHz  
8x HP NOT AVAILABLE 16 GB 2 rank 2133 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"  
OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 110**

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECfp\_base2006 = 105**

**CPU2006 license:** 3

**Test date:** Nov-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 110**

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECfp\_base2006 = 105**

**CPU2006 license:** 3

**Test date:** Nov-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 110**

ProLiant DL360 Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECfp\_base2006 = 105**

**CPU2006 license:** 3

**Test date:** Nov-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:35:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 November 2014.