



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 602

Huawei CH242 v3 (E7-4809 v2)

SPECfp_rate_base2006 = 588

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

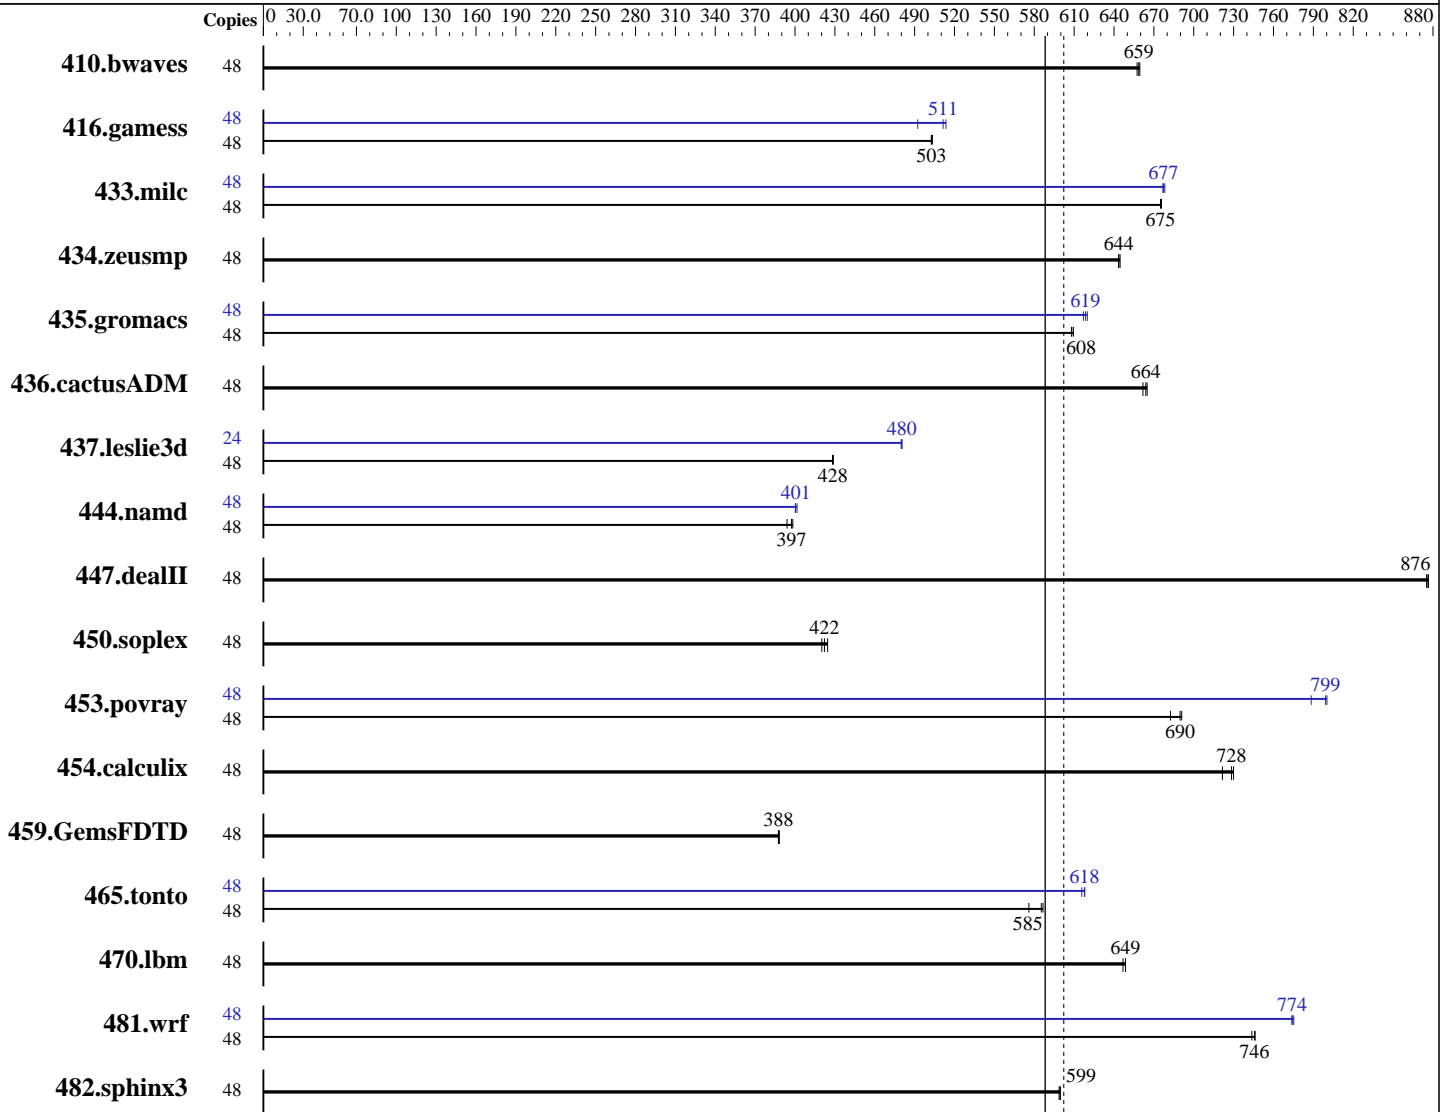

SPECfp_rate_base2006 = 588

SPECfp_rate2006 = 602

Hardware

CPU Name: Intel Xeon E7-4809 v2
 CPU Characteristics:
 CPU MHz: 1900
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 602

Huawei CH242 v3 (E7-4809 v2)

SPECfp_rate_base2006 = 588

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz)
Disk Subsystem: 1 X 300 GB SATA 7200RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	990	659	989	659	992	657	48	990	659	989	659	992	657
416.gamess	48	1870	503	1867	503	1870	503	48	1838	511	1830	514	1909	492
433.milc	48	653	675	653	675	652	676	48	651	677	651	677	650	678
434.zeusmp	48	679	644	678	645	679	643	48	679	644	678	645	679	643
435.gromacs	48	564	608	563	608	562	609	48	553	620	555	617	554	619
436.cactusADM	48	863	665	867	662	864	664	48	863	665	867	662	864	664
437.leslie3d	48	1053	428	1052	429	1054	428	24	470	480	470	480	470	480
444.namd	48	966	398	969	397	977	394	48	959	402	961	401	962	400
447.dealII	48	626	877	627	875	627	876	48	626	877	627	875	627	876
450.soplex	48	953	420	948	422	943	425	48	953	420	948	422	943	425
453.povray	48	370	690	374	683	370	691	48	324	788	320	799	319	800
454.calculix	48	543	730	549	722	544	728	48	543	730	549	722	544	728
459.GemsFDTD	48	1314	387	1312	388	1314	388	48	1314	387	1312	388	1314	388
465.tonto	48	807	585	805	587	820	576	48	767	616	765	618	764	618
470.lbm	48	1017	649	1017	649	1020	647	48	1017	649	1017	649	1020	647
481.wrf	48	721	744	719	746	719	746	48	693	774	692	775	693	774
482.sphinx3	48	1563	599	1560	600	1561	599	48	1563	599	1560	600	1561	599

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 602

Huawei CH242 v3 (E7-4809 v2)

SPECfp_rate_base2006 = 588

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Platform Notes

BIOS configuration:

Set VMSE LockStep mode disable

Sysinfo program /spec14/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on localhost.localdomain Sat Nov 1 10:19:29 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4809 v2 @ 1.90GHz

4 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

physical 2: cores 0 1 2 3 4 5

physical 3: cores 0 1 2 3 4 5

cache size : 12288 KB

From /proc/meminfo

MemTotal: 264357008 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 31 16:05

SPEC is set to: /spec14

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	255G	139G	104G	58%	/

Additional information from dmidecode:

BIOS American Megatrends Inc. BLISV302 09/03/2014

Memory:

32x 8 GB

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 602

Huawei CH242 v3 (E7-4809 v2)

SPECfp_rate_base2006 = 588

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Platform Notes (Continued)

32x Micron 36KSF1G72PZ-1G6K1 8 GB 1066 MHz 2 rank

(End of data from sysinfo program)

The system use 256 GB memory

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 602

Huawei CH242 v3 (E7-4809 v2)

SPECfp_rate_base2006 = 588

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 602

Huawei CH242 v3 (E7-4809 v2)

SPECfp_rate_base2006 = 588

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 602

Huawei CH242 v3 (E7-4809 v2)

SPECfp_rate_base2006 = 588

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Nov-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 3 10:28:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.