



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 918

Express5800/R120f-1M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 885

CPU2006 license: 9006


Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: May-2014

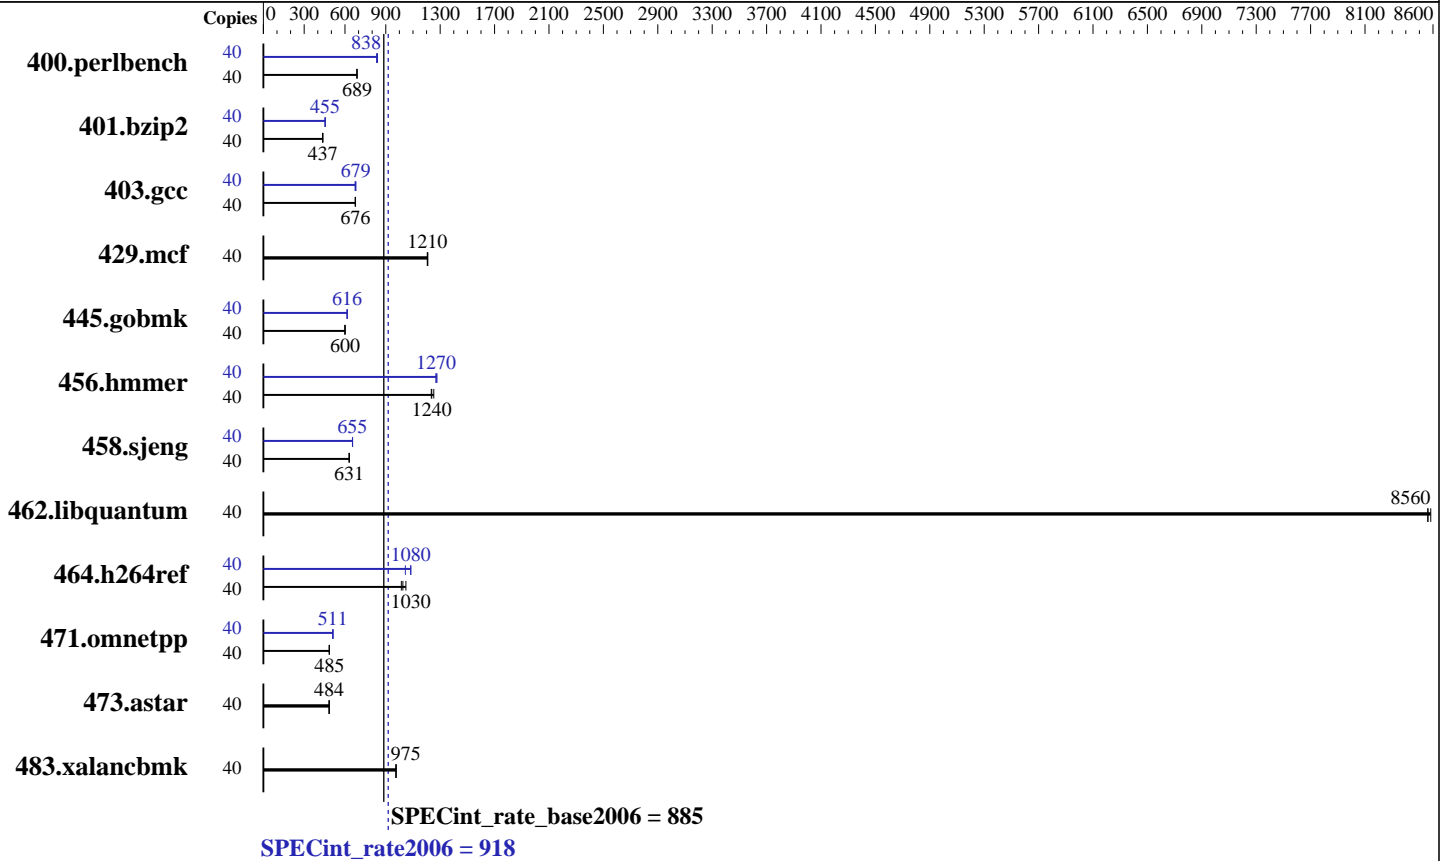

Hardware

CPU Name: Intel Xeon E5-2660 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.17.1.el6.x86_64
 Compiler: C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 918

Express5800/R120f-1M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 885

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: May-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	567	689	568	689	568	688	40	466	838	469	832	466	839
401.bzip2	40	883	437	883	437	888	435	40	848	455	848	455	852	453
403.gcc	40	475	677	476	676	477	675	40	478	674	474	680	474	679
429.mcf	40	302	1210	303	1200	302	1210	40	302	1210	303	1200	302	1210
445.gobmk	40	698	601	699	600	700	599	40	681	616	681	616	681	616
456.hammer	40	298	1250	302	1230	301	1240	40	292	1280	294	1270	294	1270
458.sjeng	40	766	631	767	631	767	631	40	738	655	738	656	739	655
462.libquantum	40	96.8	8560	96.8	8560	96.6	8580	40	96.8	8560	96.8	8560	96.6	8580
464.h264ref	40	873	1010	845	1050	863	1030	40	816	1080	817	1080	848	1040
471.omnetpp	40	515	485	514	486	517	483	40	490	511	489	512	489	511
473.astar	40	580	484	580	484	581	483	40	580	484	580	484	581	483
483.xalancbmk	40	283	976	283	975	283	975	40	283	976	283	975	283	975

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance
Patrol Scrub: Disabled
Demand Scrub: Disabled
Cluster on Die: Enabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

The Express5800/R120f-1M (Intel Xeon E5-2660 v3) and the Express5800/R120f-2M (Intel Xeon E5-2660 v3) models are electronically equivalent. The results have been measured on the Express5800/R120f-2M (Intel Xeon E5-2660 v3) model.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 918

Express5800/R120f-1M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 885

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: May-2014

General Notes (Continued)

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 918

Express5800/R120f-1M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 885

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: May-2014

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 918

Express5800/R120f-1M (Intel Xeon E5-2660 v3)

SPECint_rate_base2006 = 885

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: May-2014

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Feb 5 18:13:52 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 December 2014.