



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = 481

Express5800/R120f-1M (Intel Xeon E5-2620 v3)

SPECfp_rate_base2006 = 471

CPU2006 license: 9006


Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

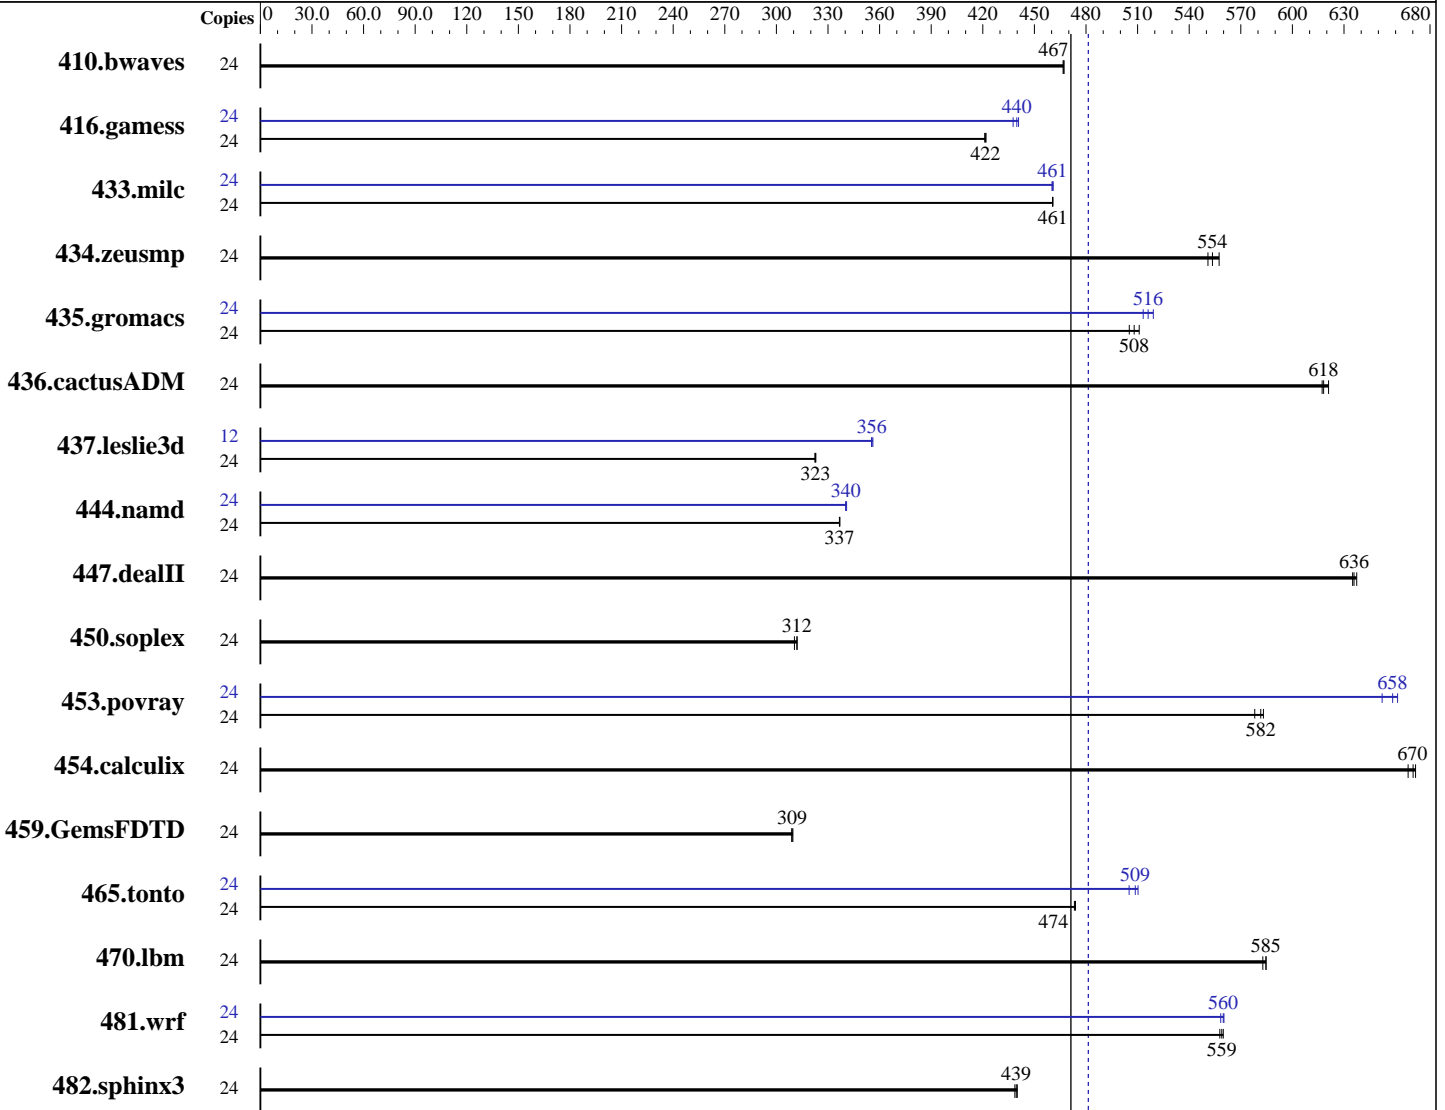

SPECfp_rate_base2006 = 471

SPECfp_rate2006 = 481

Hardware

CPU Name: Intel Xeon E5-2620 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.17.1.el6.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **481**

Express5800/R120f-1M (Intel Xeon E5-2620 v3)

SPECfp_rate_base2006 = **471**

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	699	467	698	467	698	467	24	699	467	698	467	698	467		
416.gamess	24	1114	422	1114	422	1116	421	24	1066	441	1074	438	1069	440		
433.milc	24	478	461	478	461	478	461	24	478	461	478	461	479	460		
434.zeusmp	24	396	551	395	554	392	557	24	396	551	395	554	392	557		
435.gromacs	24	337	508	335	511	339	505	24	332	516	334	513	330	519		
436.cactusADM	24	465	617	464	618	462	621	24	465	617	464	618	462	621		
437.leslie3d	24	699	323	700	322	699	323	12	317	356	317	355	317	356		
444.namd	24	572	337	572	337	571	337	24	566	340	565	340	565	341		
447.dealII	24	432	635	432	636	431	637	24	432	635	432	636	431	637		
450.soplex	24	645	310	642	312	641	312	24	645	310	642	312	641	312		
453.povray	24	219	583	220	582	221	578	24	196	652	193	661	194	658		
454.calculix	24	297	667	295	672	295	670	24	297	667	295	672	295	670		
459.GemsFDTD	24	824	309	824	309	823	310	24	824	309	824	309	823	310		
465.tonto	24	498	474	499	473	499	474	24	464	509	463	510	468	505		
470.lbm	24	564	585	564	585	566	583	24	564	585	564	585	566	583		
481.wrf	24	479	560	480	559	481	558	24	479	560	480	558	479	560		
482.sphinx3	24	1063	440	1066	439	1064	439	24	1063	440	1066	439	1064	439		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 481

Express5800/R120f-1M (Intel Xeon E5-2620 v3)

SPECfp_rate_base2006 = 471

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

Platform Notes (Continued)

Patrol Scrub: Disabled
Demand Scrub: Disabled

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
```

The Express5800/R120f-1M (Intel Xeon E5-2620 v3) and the Express5800/R120f-2M (Intel Xeon E5-2620 v3) models are electronically equivalent. The results have been measured on the Express5800/R120f-2M (Intel Xeon E5-2620 v3) model.

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 481

Express5800/R120f-1M (Intel Xeon E5-2620 v3)

SPECfp_rate_base2006 = 471

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 481

Express5800/R120f-1M (Intel Xeon E5-2620 v3)

SPECfp_rate_base2006 = 471

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Oct-2014

Hardware Availability: Feb-2015

Software Availability: Jul-2014

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 481

Express5800/R120f-1M (Intel Xeon E5-2620 v3)

SPECfp_rate_base2006 = 471

CPU2006 license: 9006

Test date: Oct-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Feb 5 18:33:35 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 December 2014.