



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECint®\_rate2006 = 926

### Inspur NF5280M4 (Intel Xeon E5-2660 v3)

SPECint\_rate\_base2006 = 892

CPU2006 license: 3358


Test date: Dec-2014

Test sponsor: Inspur Corporation

Hardware Availability: Sep-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

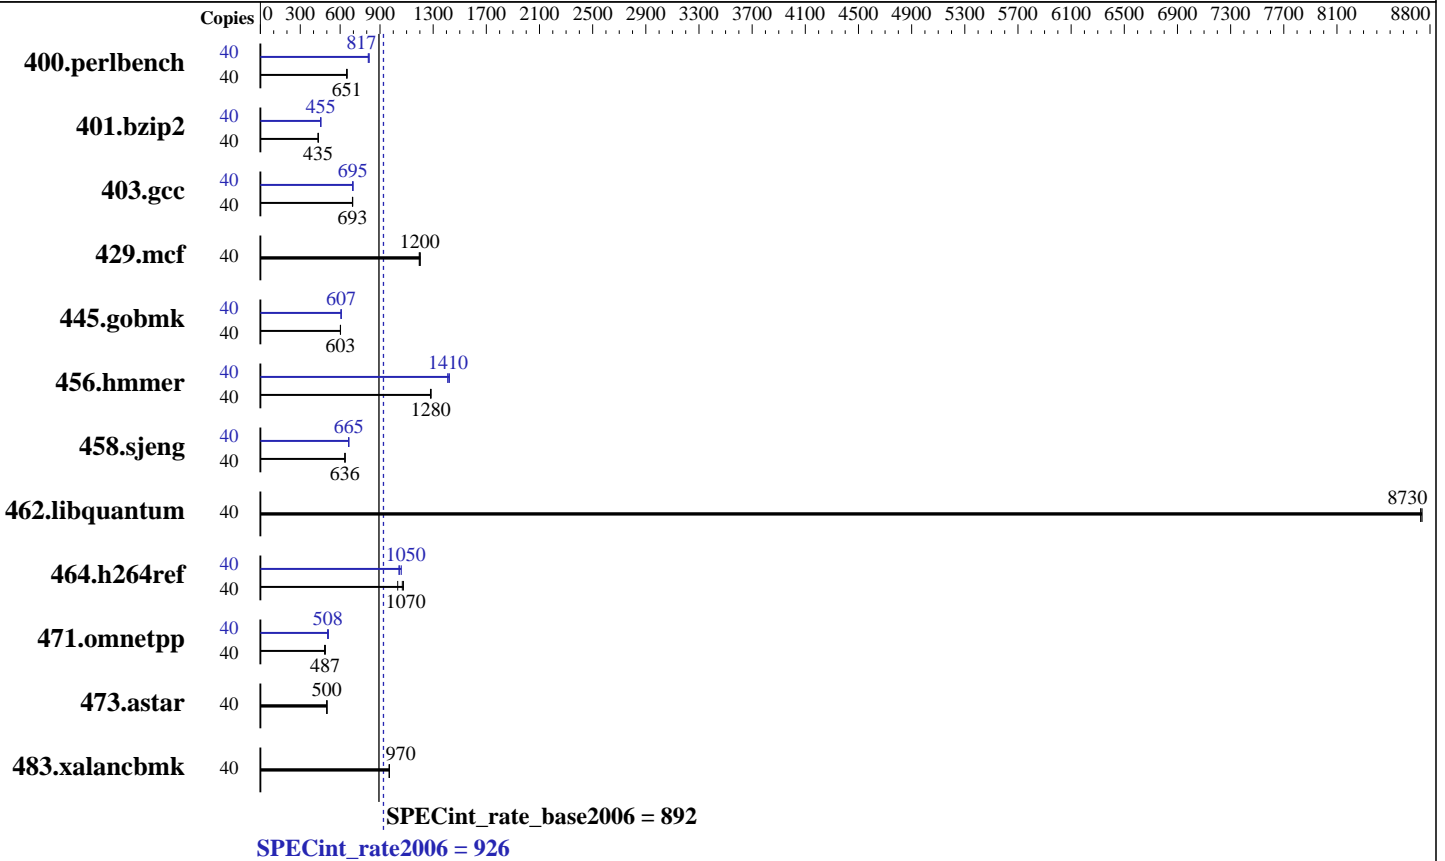

### Hardware

CPU Name: Intel Xeon E5-2660 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 450 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 926

Inspur NF5280M4 (Intel Xeon E5-2660 v3)

SPECint\_rate\_base2006 = 892

CPU2006 license: 3358

Test date: Dec-2014

Test sponsor: Inspur Corporation

Hardware Availability: Sep-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	599	653	<b>601</b>	<b>651</b>	602	649	40	478	818	<b>478</b>	<b>817</b>	482	812
401.bzip2	40	<b>887</b>	<b>435</b>	885	436	889	434	40	852	453	849	455	<b>849</b>	<b>455</b>
403.gcc	40	465	693	463	695	<b>464</b>	<b>693</b>	40	462	697	464	695	<b>463</b>	<b>695</b>
429.mcf	40	305	1200	303	1200	<b>304</b>	<b>1200</b>	40	305	1200	303	1200	<b>304</b>	<b>1200</b>
445.gobmk	40	697	602	696	603	<b>696</b>	<b>603</b>	40	690	608	691	607	<b>691</b>	<b>607</b>
456.hammer	40	292	1280	<b>291</b>	<b>1280</b>	291	1280	40	265	1410	262	1420	<b>264</b>	<b>1410</b>
458.sjeng	40	759	638	761	636	<b>761</b>	<b>636</b>	40	<b>728</b>	<b>665</b>	728	665	728	664
462.libquantum	40	<b>94.9</b>	<b>8730</b>	94.9	8730	94.8	8740	40	<b>94.9</b>	<b>8730</b>	94.9	8730	94.8	8740
464.h264ref	40	<b>829</b>	<b>1070</b>	857	1030	822	1080	40	835	1060	849	1040	<b>845</b>	<b>1050</b>
471.omnetpp	40	518	483	<b>514</b>	<b>487</b>	511	489	40	494	506	488	512	<b>492</b>	<b>508</b>
473.astar	40	<b>561</b>	<b>500</b>	560	501	562	500	40	<b>561</b>	<b>500</b>	560	501	562	500
483.xalancbmk	40	284	971	<b>285</b>	<b>970</b>	285	969	40	284	971	<b>285</b>	<b>970</b>	285	969

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/CPU2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 \$# e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Mon Dec 1 15:46:16 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 5  
siblings : 10

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 926

Inspur NF5280M4 (Intel Xeon E5-2660 v3)

SPECint\_rate\_base2006 = 892

CPU2006 license: 3358

Test date: Dec-2014

Test sponsor: Inspur Corporation

Hardware Availability: Sep-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 12800 KB
```

```
From /proc/meminfo
MemTotal:          263858652 kB
HugePages_Total:   0
Hugepagesize:      2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Dec 1 15:34
```

```
SPEC is set to: /home/CPU2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   393G  14G  380G   4% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 4.0.1 10/30/2014
Memory:
8x NO DIMM NO DIMM
16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 926

Inspur NF5280M4 (Intel Xeon E5-2660 v3)

SPECint\_rate\_base2006 = 892

CPU2006 license: 3358

Test date: Dec-2014

Test sponsor: Inspur Corporation

Hardware Availability: Sep-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 926

Inspur NF5280M4 (Intel Xeon E5-2660 v3)

SPECint\_rate\_base2006 = 892

CPU2006 license: 3358

Test date: Dec-2014

Test sponsor: Inspur Corporation

Hardware Availability: Sep-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 926

Inspur NF5280M4 (Intel Xeon E5-2660 v3)

SPECint\_rate\_base2006 = 892

CPU2006 license: 3358

Test date: Dec-2014

Test sponsor: Inspur Corporation

Hardware Availability: Sep-2014

Tested by: Inspur Corporation

Software Availability: Nov-2014

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Dec 16 13:11:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 December 2014.