



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp®\_rate2006 = 80.3

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp\_rate\_base2006 = 79.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Dec-2014

Hardware Availability: Jul-2014

Software Availability: Oct-2013

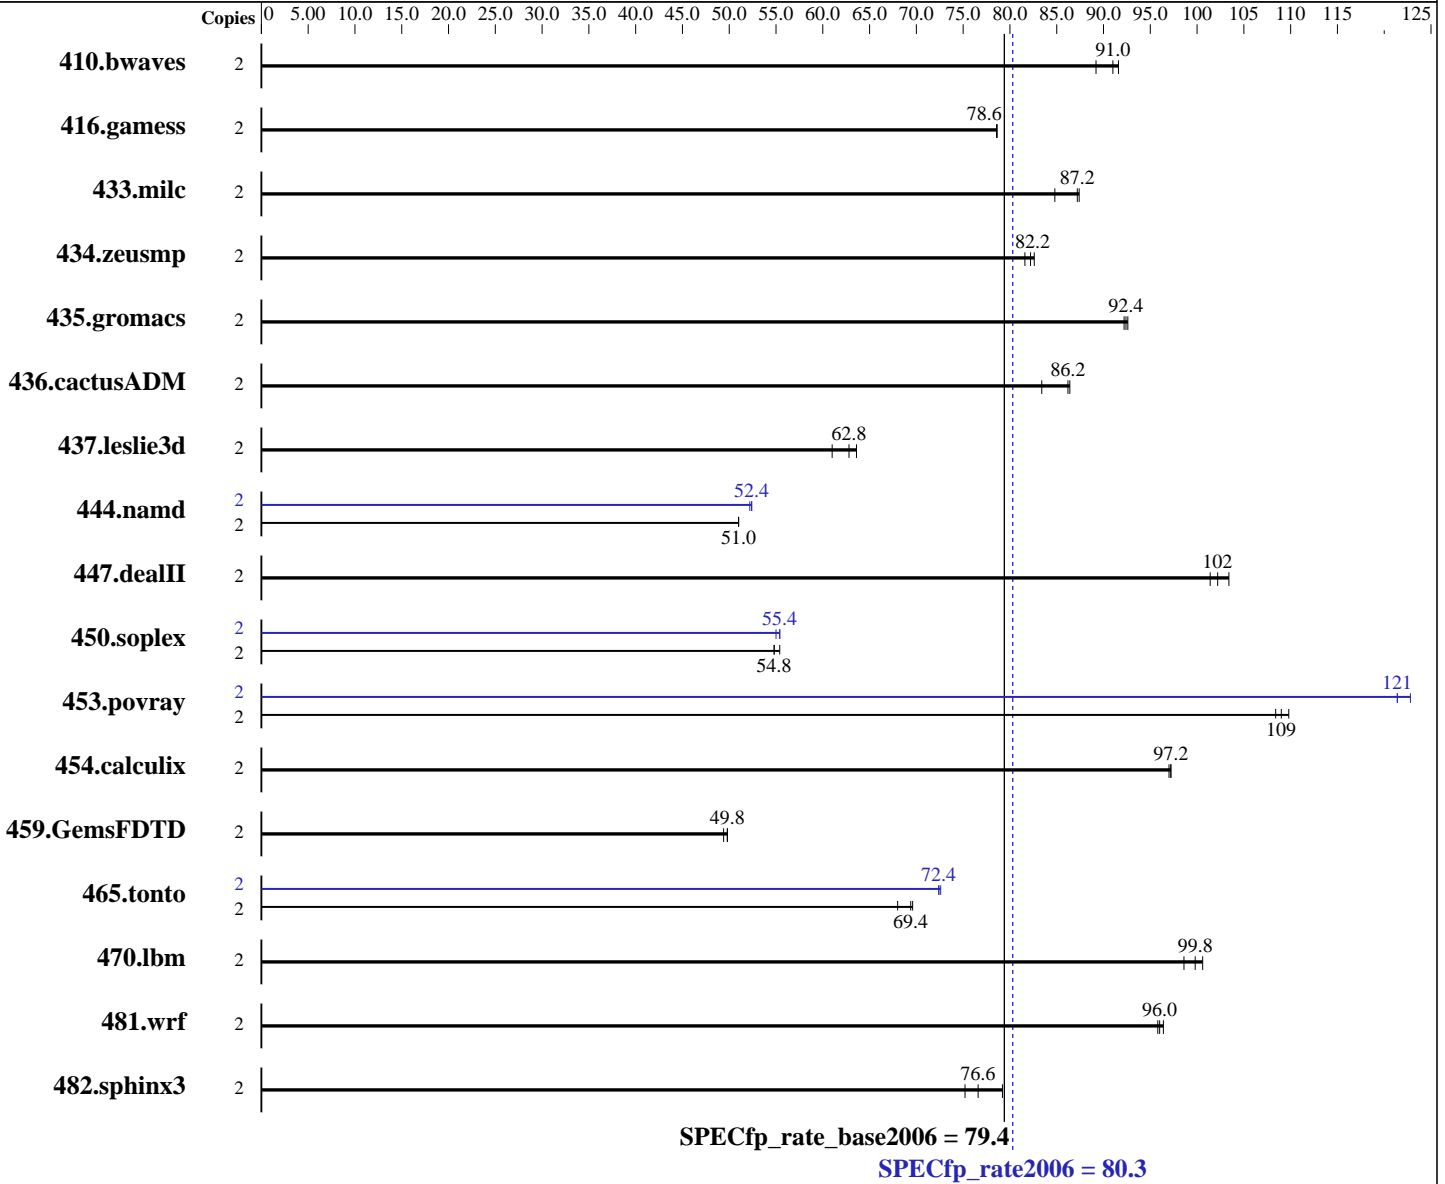

## Hardware

CPU Name: Intel Pentium G3460  
 CPU Characteristics:  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Microsoft Windows 8.1 Pro  
 6.3.9600 N/A Build 9600  
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;  
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: No

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 80.3

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp\_rate\_base2006 = 79.4

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)  
Disk Subsystem: 1 TB Seagate SATA, 7200RPM  
Other Hardware: None

File System: NTFS  
System State: Default  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	304	89.2	<b>299</b>	<b>91.0</b>	297	91.6	2	304	89.2	<b>299</b>	<b>91.0</b>	297	91.6
416.gamess	2	499	78.6	498	78.6	<b>499</b>	<b>78.6</b>	2	499	78.6	498	78.6	<b>499</b>	<b>78.6</b>
433.milc	2	217	84.8	210	87.4	<b>211</b>	<b>87.2</b>	2	217	84.8	210	87.4	<b>211</b>	<b>87.2</b>
434.zeusmp	2	<b>222</b>	<b>82.2</b>	220	82.6	223	81.6	2	<b>222</b>	<b>82.2</b>	220	82.6	223	81.6
435.gromacs	2	<b>155</b>	<b>92.4</b>	155	92.2	154	92.6	2	<b>155</b>	<b>92.4</b>	155	92.2	154	92.6
436.cactusADM	2	<b>278</b>	<b>86.2</b>	277	86.4	287	83.4	2	<b>278</b>	<b>86.2</b>	277	86.4	287	83.4
437.leslie3d	2	<b>299</b>	<b>62.8</b>	295	63.6	308	61.0	2	<b>299</b>	<b>62.8</b>	295	63.6	308	61.0
444.namd	2	<b>315</b>	<b>51.0</b>	315	51.0	315	51.0	2	<b>307</b>	<b>52.4</b>	307	52.2	306	52.4
447.dealII	2	<b>224</b>	<b>102</b>	221	103	226	101	2	<b>224</b>	<b>102</b>	221	103	226	101
450.soplex	2	<b>304</b>	<b>54.8</b>	302	55.4	305	54.8	2	303	55.0	<b>302</b>	<b>55.4</b>	301	55.4
453.povray	2	<b>97.6</b>	<b>109</b>	96.9	110	98.1	108	2	<b>87.6</b>	<b>121</b>	87.7	121	86.6	123
454.calculix	2	170	97.2	170	97.0	<b>170</b>	<b>97.2</b>	2	170	97.2	170	97.0	<b>170</b>	<b>97.2</b>
459.GemsFDTD	2	429	49.4	426	49.8	<b>427</b>	<b>49.8</b>	2	429	49.4	426	49.8	<b>427</b>	<b>49.8</b>
465.tonto	2	283	69.6	289	68.0	<b>283</b>	<b>69.4</b>	2	<b>272</b>	<b>72.4</b>	271	72.6	272	72.4
470.lbm	2	<b>276</b>	<b>99.8</b>	279	98.6	273	101	2	<b>276</b>	<b>99.8</b>	279	98.6	273	101
481.wrf	2	233	95.8	<b>233</b>	<b>96.0</b>	232	96.4	2	233	95.8	<b>233</b>	<b>96.0</b>	232	96.4
482.sphinx3	2	518	75.2	<b>509</b>	<b>76.6</b>	493	79.2	2	518	75.2	<b>509</b>	<b>76.6</b>	493	79.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:  
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 80.3

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp\_rate\_base2006 = 79.4

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt10C37B4DEB68 Wed Dec 3 07:18:33 2014

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro  
OS Version : 6.3.9600 N/A Build 9600  
System Manufacturer: ASUS  
System Model : All Series  
Processor(s) : 1 Processor(s) Installed.  
 [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3500 Mhz  
BIOS Version : American Megatrends Inc. 0317, 4/23/2014  
Total Physical Memory: 6,021 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0  
L2CacheSize : 512  
L3CacheSize : 3072  
MaxClockSpeed : 3500  
Name : Intel(R) Pentium(R) CPU G3460 @ 3.50GHz  
NumberOfCores : 2  
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 80.3

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp\_rate\_base2006 = 79.4

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Dec-2014  
Hardware Availability: Jul-2014  
Software Availability: Oct-2013

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc10 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64  
416.gamess: -DSPEC\_CPU\_P64  
433.milc: -DSPEC\_CPU\_P64  
434.zeusmp: -DSPEC\_CPU\_P64  
435.gromacs: -DSPEC\_CPU\_P64  
436.cactusADM: -DSPEC\_CPU\_P64 /names:lowercase /assume:underscore  
437.leslie3d: -DSPEC\_CPU\_P64  
444.namd: -DSPEC\_CPU\_P64 /TP  
447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
-Qoption,cpp,--ms\_incompat\_treatment\_of\_commas\_in\_macros  
450.soplex: -DSPEC\_CPU\_P64  
453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NEED\_INVHYP -DNEED\_INVHYP  
454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER /names:lowercase  
459.GemsFDTD: -DSPEC\_CPU\_P64  
465.tonto: -DSPEC\_CPU\_P64  
470.lbm: -DSPEC\_CPU\_P64  
481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 80.3

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp\_rate\_base2006 = 79.4

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Dec-2014  
Hardware Availability: Jul-2014  
Software Availability: Oct-2013

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc10 -Qstd=c99  
  
C++ benchmarks:  
icl -Qvc10  
  
Fortran benchmarks:  
ifort  
  
Benchmarks using both Fortran and C:  
icl -Qvc10 -Qstd=c99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
  
433.milc: basepeak = yes  
  
470.lbm: basepeak = yes  
  
482.sphinx3: basepeak = yes  
  
C++ benchmarks:  
  
444.namd: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000  
shlW64M.lib -link /FORCE:MULTIPLE  
  
447.dealIII: basepeak = yes  
  
450.soplex: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib  
-link /FORCE:MULTIPLE  
  
453.povray: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32  
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE  
  
Fortran benchmarks:  
  
410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECfp\_rate2006 = 80.3

ASUS H97M-PLUS Motherboard (Intel Pentium G3460)

SPECfp\_rate\_base2006 = 79.4

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

## Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000  
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Dec 30 16:12:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 December 2014.