



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint®_rate2006 = 113

ASUS H97M-PLUS Motherboard (Intel Core i3-4370)

SPECint_rate_base2006 = 107

CPU2006 license: 13


Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

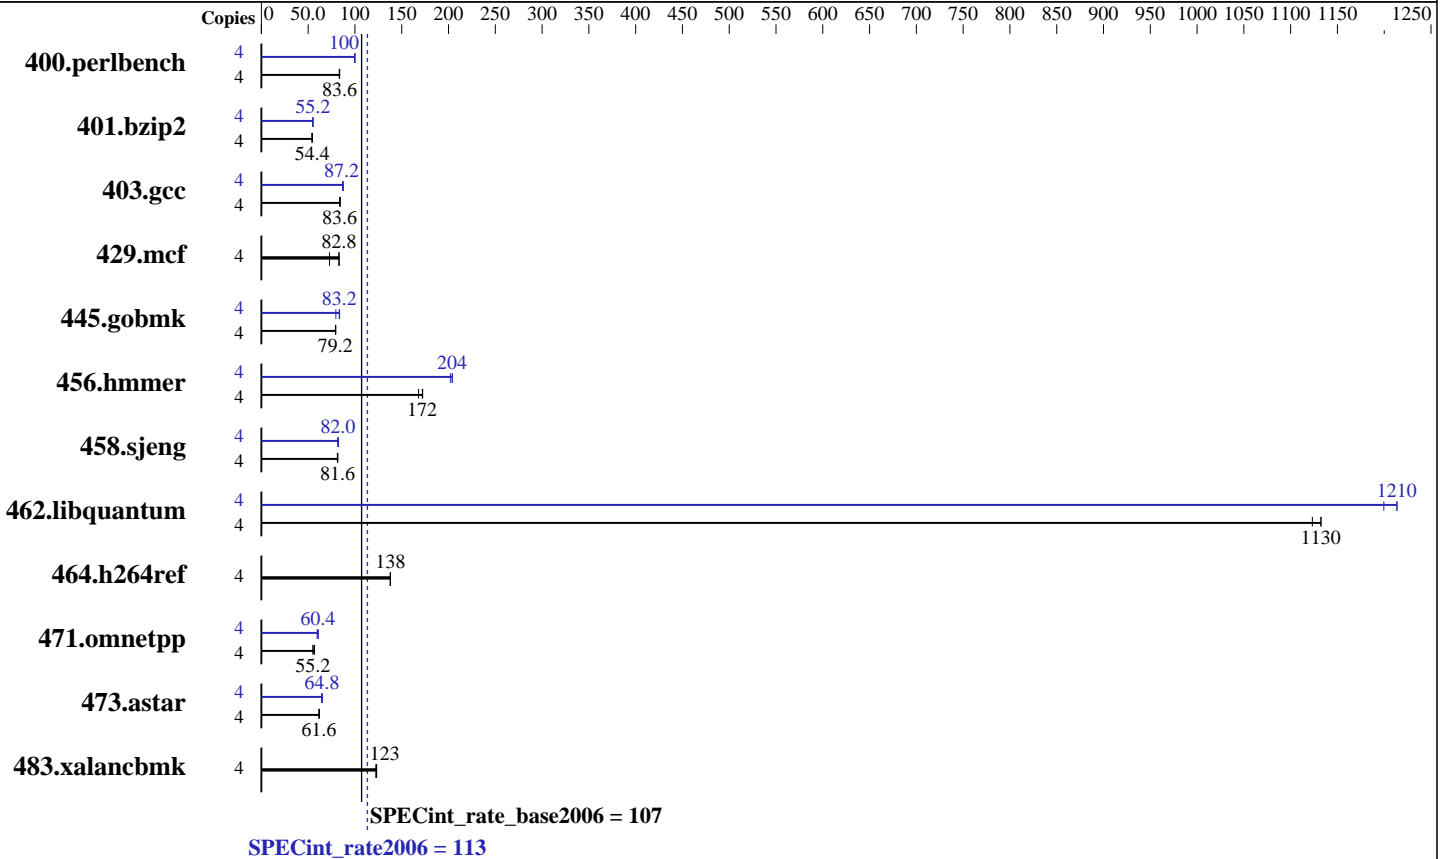

Hardware

CPU Name: Intel Core i3-4370
 CPU Characteristics: 3800
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 TB Seagate SATA, 7200RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 113

ASUS H97M-PLUS Motherboard (Intel Core i3-4370)

SPECint_rate_base2006 = 107

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Dec-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	469	83.2	467	83.6	<u>467</u>	<u>83.6</u>	4	391	100	393	99.6	<u>391</u>	<u>100</u>
401.bzip2	4	715	54.0	708	54.4	<u>709</u>	<u>54.4</u>	4	<u>701</u>	<u>55.2</u>	704	54.8	700	55.2
403.gcc	4	<u>385</u>	<u>83.6</u>	386	83.6	381	84.4	4	<u>369</u>	<u>87.2</u>	372	86.8	367	87.6
429.mcf	4	<u>441</u>	<u>82.8</u>	439	83.2	501	72.8	4	<u>441</u>	<u>82.8</u>	439	83.2	501	72.8
445.gobmk	4	528	79.6	<u>529</u>	<u>79.2</u>	530	79.2	4	527	79.6	501	83.6	<u>504</u>	<u>83.2</u>
456.hammer	4	222	168	216	172	<u>217</u>	<u>172</u>	4	185	202	183	204	<u>183</u>	<u>204</u>
458.sjeng	4	597	81.2	593	81.6	<u>594</u>	<u>81.6</u>	4	<u>590</u>	<u>82.0</u>	587	82.4	592	81.6
462.libquantum	4	73.2	1130	<u>73.2</u>	<u>1130</u>	73.8	1120	4	69.1	1200	68.3	1210	<u>68.3</u>	<u>1210</u>
464.h264ref	4	644	138	642	138	<u>642</u>	<u>138</u>	4	644	138	642	138	<u>642</u>	<u>138</u>
471.omnetpp	4	440	56.8	452	55.2	<u>452</u>	<u>55.2</u>	4	<u>415</u>	<u>60.4</u>	412	60.8	421	59.6
473.astar	4	452	62.0	<u>455</u>	<u>61.6</u>	455	61.6	4	437	64.4	431	65.2	<u>435</u>	<u>64.8</u>
483.xalancbmk	4	<u>225</u>	<u>123</u>	225	122	224	123	4	<u>225</u>	<u>123</u>	225	122	224	123

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

Sysinfo program C:\SPEC14.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt10C37B4DF2B9 Wed Dec 3 00:21:25 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'
OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: ASUS
System Model : All Series
Processor(s) : 1 Processor(s) Installed.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 113

ASUS H97M-PLUS Motherboard (Intel Core i3-4370)

SPECint_rate_base2006 = 107

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Dec-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

Platform Notes (Continued)

[01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3800 Mhz
BIOS Version : American Megatrends Inc. 0317, 4/23/2014
Total Physical Memory: 3,973 MB

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 512
L3CacheSize   : 4096
MaxClockSpeed : 3800
Name          : Intel(R) Core(TM) i3-4370 CPU @ 3.80GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:
icl -Qvc10 -Qstd=c99

C++ benchmarks:
icl -Qvc10

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 113

ASUS H97M-PLUS Motherboard (Intel Core i3-4370)

SPECint_rate_base2006 = 107

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Dec-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

Base Optimization Flags (Continued)

C++ benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icl -Qvc10 -Qstd=c99
456.hmmr: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
-Qstd=c99
C++ benchmarks (except as noted below):
icl -Qvc10
473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
456.hmmr: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 113

ASUS H97M-PLUS Motherboard (Intel Core i3-4370)

SPECint_rate_base2006 = 107

CPU2006 license: 13

Test date: Dec-2014

Test sponsor: Intel Corporation

Hardware Availability: Jul-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

400.perlbench: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmcr: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll14
/F512000000

462.libquantum: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint_rate2006 = 113

ASUS H97M-PLUS Motherboard (Intel Core i3-4370)

SPECint_rate_base2006 = 107

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Dec-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

Peak Other Flags (Continued)

```
456.hmmr: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
          -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
                -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

C++ benchmarks:

```
473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 30 16:13:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 December 2014.