



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

### SPECfp®\_rate2006 = 826

### Express5800/R120f-1M (Intel Xeon E5-2695 v3)

### SPECfp\_rate\_base2006 = 803

CPU2006 license: 9006


Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

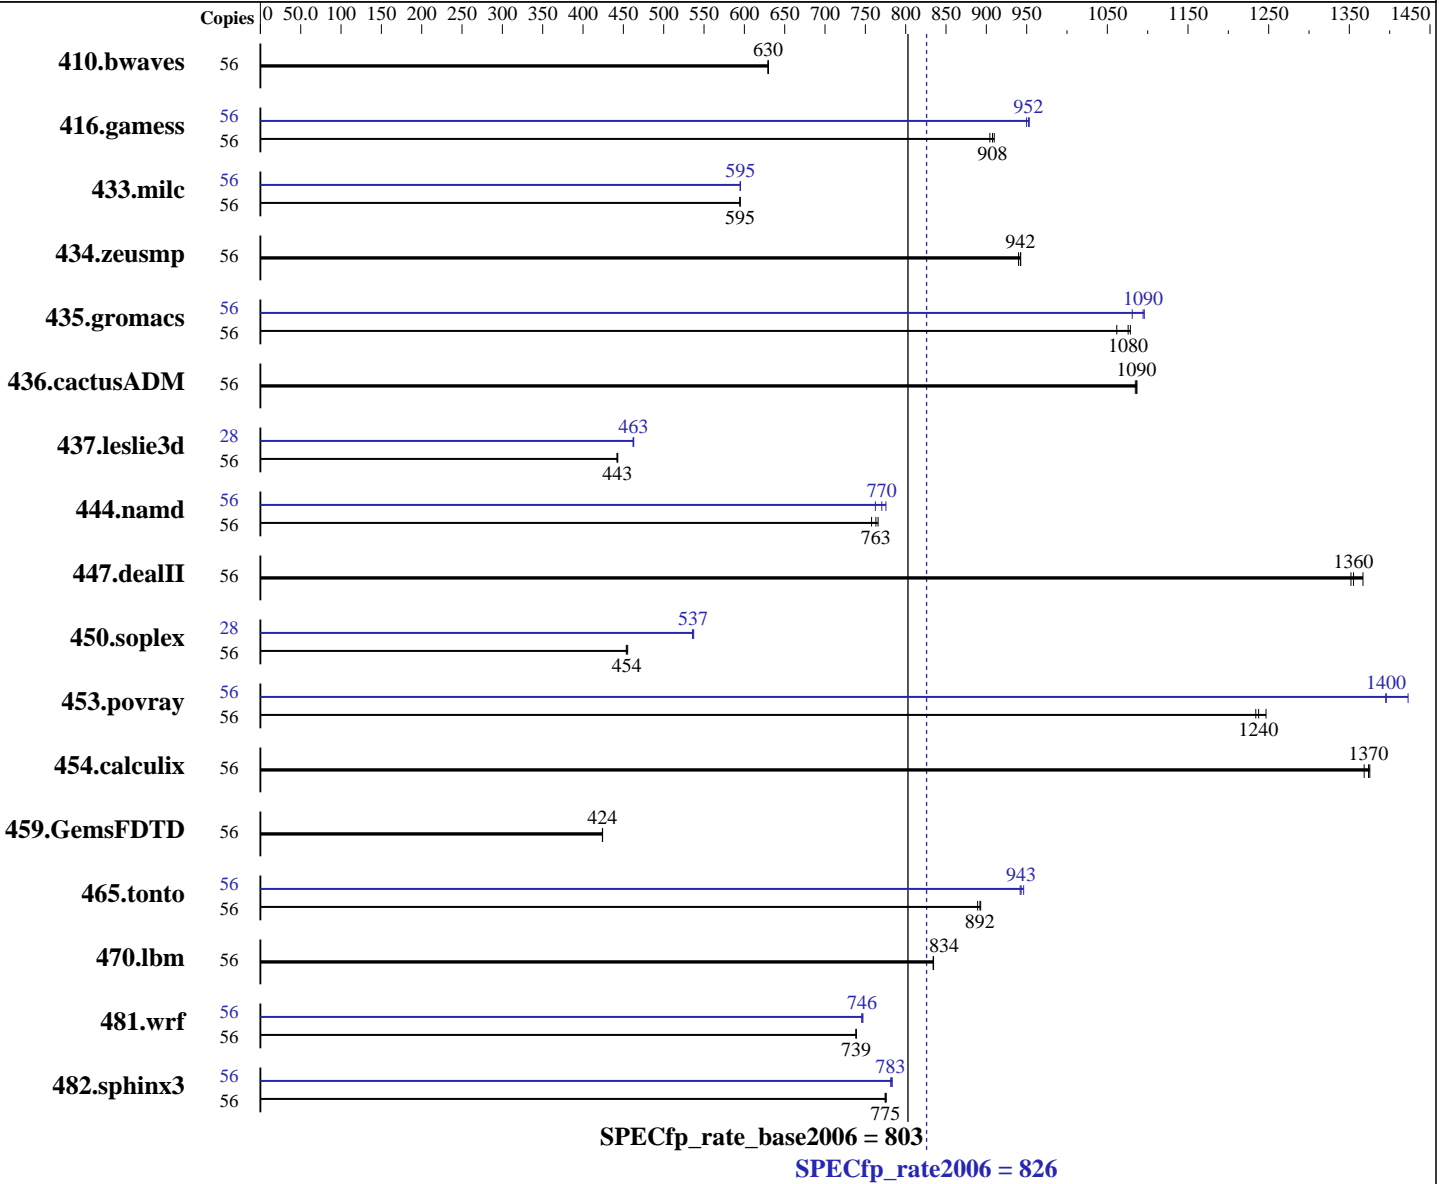

#### Hardware

CPU Name: Intel Xeon E5-2695 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Kernel 2.6.32-431.17.1.el6.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp\_rate2006 = **826**

Express5800/R120f-1M (Intel Xeon E5-2695 v3)

SPECfp\_rate\_base2006 = **803**

CPU2006 license: 9006

Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1208	630	1210	629	<u>1209</u>	<u>630</u>	56	1208	630	1210	629	<u>1209</u>	<u>630</u>
416.gamess	56	1212	904	1205	910	<u>1208</u>	<u>908</u>	56	<u>1151</u>	<u>952</u>	1150	953	1154	950
433.milc	56	<u>865</u>	<u>595</u>	865	595	864	595	56	864	595	<u>864</u>	<u>595</u>	864	595
434.zeusmp	56	542	940	541	943	<u>541</u>	<u>942</u>	56	542	940	541	943	<u>541</u>	<u>942</u>
435.gromacs	56	<u>372</u>	<u>1080</u>	377	1060	371	1080	56	365	1100	<u>365</u>	<u>1090</u>	370	1080
436.cactusADM	56	616	1090	<u>616</u>	<u>1090</u>	617	1080	56	616	1090	<u>616</u>	<u>1090</u>	617	1080
437.leslie3d	56	1191	442	<u>1189</u>	<u>443</u>	1188	443	28	<u>569</u>	<u>463</u>	569	463	570	462
444.namd	56	593	758	586	766	<u>589</u>	<u>763</u>	56	589	762	<u>583</u>	<u>770</u>	579	776
447.dealII	56	474	1350	469	1370	<u>473</u>	<u>1360</u>	56	474	1350	469	1370	<u>473</u>	<u>1360</u>
450.soplex	56	<u>1028</u>	<u>454</u>	1026	455	1030	454	28	436	536	<u>435</u>	<u>537</u>	435	537
453.povray	56	<u>241</u>	<u>1240</u>	239	1250	241	1230	56	214	1400	209	1420	<u>213</u>	<u>1400</u>
454.calculix	56	338	1370	336	1380	<u>336</u>	<u>1370</u>	56	338	1370	336	1380	<u>336</u>	<u>1370</u>
459.GemsFDTD	56	<u>1401</u>	<u>424</u>	1400	424	1401	424	56	<u>1401</u>	<u>424</u>	1400	424	1401	424
465.tonto	56	<u>618</u>	<u>892</u>	617	893	620	889	56	585	942	<u>584</u>	<u>943</u>	582	946
470.lbm	56	<u>922</u>	<u>834</u>	922	834	922	835	56	<u>922</u>	<u>834</u>	922	834	922	835
481.wrf	56	<u>847</u>	<u>739</u>	847	738	847	739	56	839	745	<u>838</u>	<u>746</u>	837	747
482.sphinx3	56	1407	776	1409	775	<u>1409</u>	<u>775</u>	56	<u>1395</u>	<u>783</u>	1397	781	1393	783

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Power Management Policy: Custom  
Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 826

Express5800/R120f-1M (Intel Xeon E5-2695 v3)

SPECfp\_rate\_base2006 = 803

CPU2006 license: 9006

Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Platform Notes (Continued)

Patrol Scrub: Disabled  
Cluster on Die: Enabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 826

Express5800/R120f-1M (Intel Xeon E5-2695 v3)

SPECfp\_rate\_base2006 = 803

CPU2006 license: 9006

Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Base Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 826

Express5800/R120f-1M (Intel Xeon E5-2695 v3)

SPECfp\_rate\_base2006 = 803

CPU2006 license: 9006

Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
          -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
          -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 826

Express5800/R120f-1M (Intel Xeon E5-2695 v3)

SPECfp\_rate\_base2006 = 803

CPU2006 license: 9006

Test date: Nov-2014

Test sponsor: NEC Corporation

Hardware Availability: Feb-2015

Tested by: NEC Corporation

Software Availability: Jul-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120f-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 10 16:03:13 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 March 2015.