



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp[®]_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050


Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

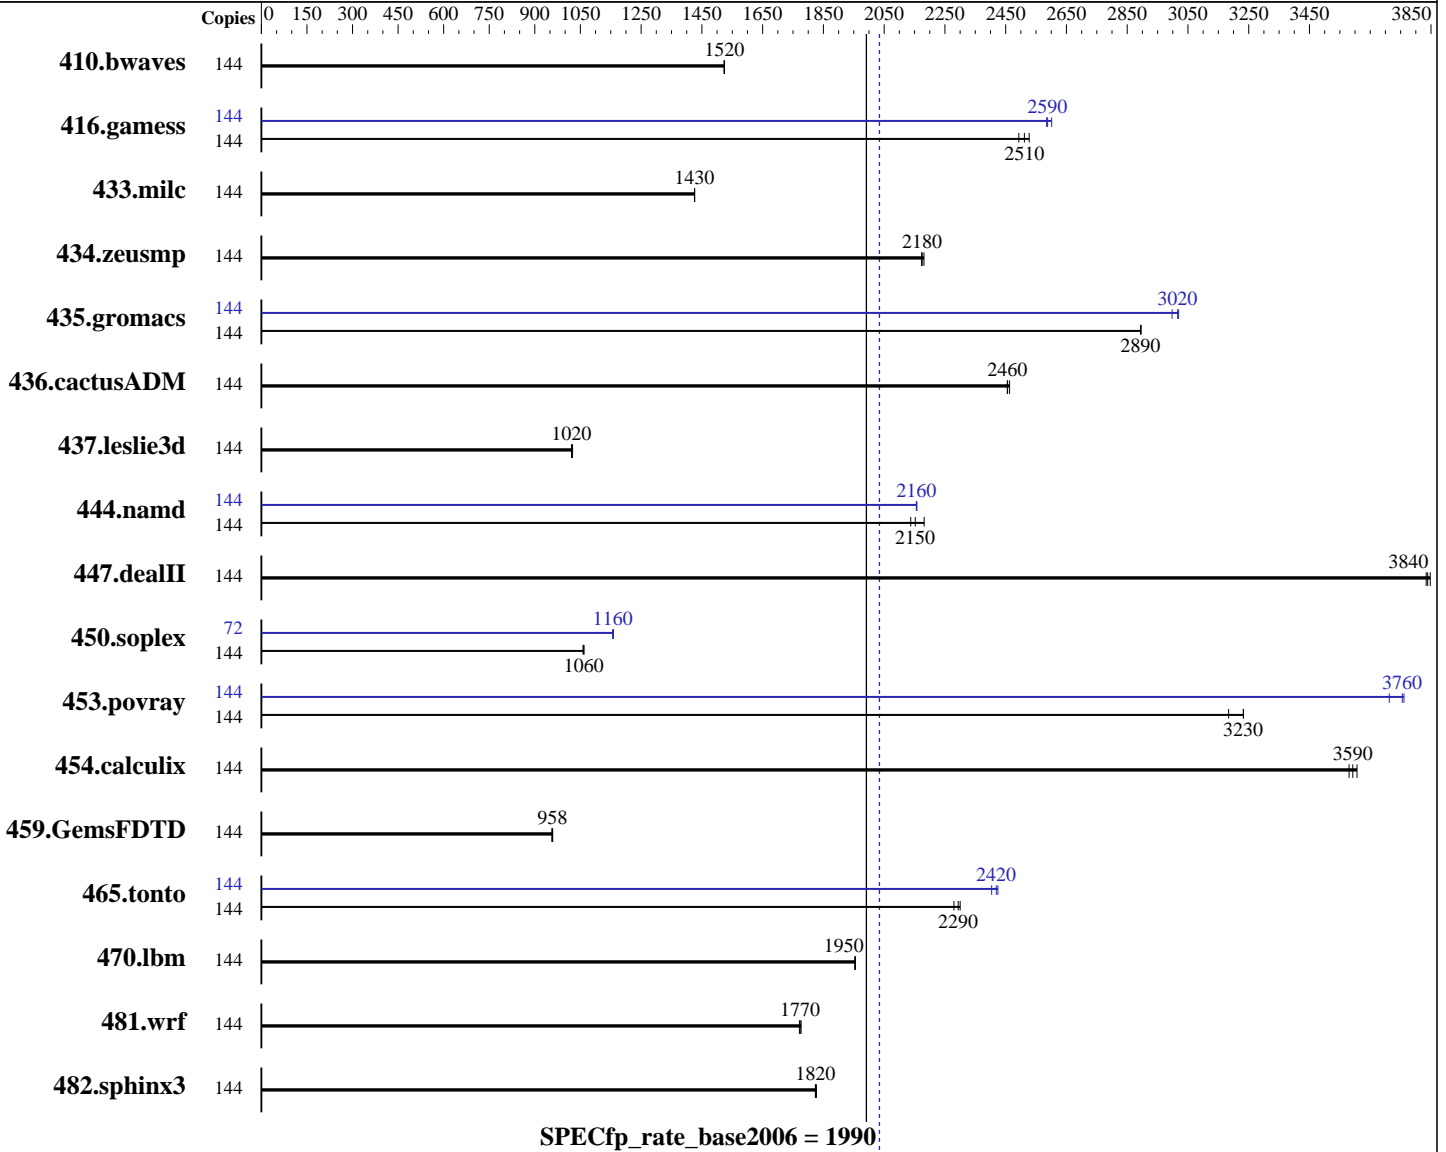

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 480 GB SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	144	1285	1520	1284	1520	1284	1520	144	1285	1520	1284	1520	1284	1520		
416.gamess	144	1131	2490	1123	2510	1116	2530	144	1084	2600	1091	2580	1089	2590		
433.milc	144	927	1430	927	1430	927	1430	144	927	1430	927	1430	927	1430		
434.zeusmp	144	602	2180	601	2180	603	2170	144	602	2180	601	2180	603	2170		
435.gromacs	144	355	2900	355	2890	355	2890	144	341	3020	341	3020	343	3000		
436.cactusADM	144	701	2460	699	2460	701	2460	144	701	2460	699	2460	701	2460		
437.leslie3d	144	1321	1020	1326	1020	1326	1020	144	1321	1020	1326	1020	1326	1020		
444.namd	144	529	2180	537	2150	540	2140	144	535	2160	535	2160	536	2160		
447.dealII	144	429	3840	430	3830	428	3850	144	429	3840	430	3830	428	3850		
450.soplex	144	1132	1060	1131	1060	1134	1060	72	519	1160	519	1160	518	1160		
453.povray	144	241	3180	237	3230	237	3230	144	204	3760	206	3710	204	3760		
454.calculix	144	329	3610	331	3590	332	3580	144	329	3610	331	3590	332	3580		
459.GemsFDTD	144	1593	959	1598	956	1595	958	144	1593	959	1598	956	1595	958		
465.tonto	144	616	2300	622	2280	618	2290	144	586	2420	584	2420	589	2400		
470.lbm	144	1012	1950	1012	1960	1013	1950	144	1012	1950	1012	1960	1013	1950		
481.wrf	144	905	1780	908	1770	907	1770	144	905	1780	908	1770	907	1770		
482.sphinx3	144	1539	1820	1536	1830	1539	1820	144	1539	1820	1536	1830	1539	1820		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/speccpu-auto-install/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Mar 1 23:21:58 2016

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
 4 "physical id"s (chips)
 144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 18
  siblings       : 36
  physical 0:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3:    cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size      : 46080 KB

```

From /proc/meminfo

```

MemTotal:      528058100 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

```

uname -a:

```

Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 1 10:31 last=5

SPEC is set to: /home/speccpu-auto-install

```

Filesystem      Type      Size      Used      Avail      Use%      Mounted on
/dev/sda5       xfs       393G      128G      265G       33%      /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. S4L_3B08 10/15/2015

Memory:

64x NO DIMM NO DIMM

32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/speccpu-auto-install/libs/32:/home/speccpu-auto-install/libs/64:/home/speccpu-auto-install/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050

Test date: Mar-2016

Test sponsor: Quanta Computer Inc.

Hardware Availability: Mar-2016

Tested by: Quanta Computer Inc.

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

SPECfp_rate2006 = 2030

QuantaGrid Q71L-4U (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 1990

CPU2006 license: 9050

Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Mar-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 5 14:55:33 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 April 2016.