



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-MT  
(X11SSH-TF , Intel Xeon E3-1225 v5)

SPECfp<sup>®</sup>\_rate2006 = 182

SPECfp\_rate\_base2006 = 179

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

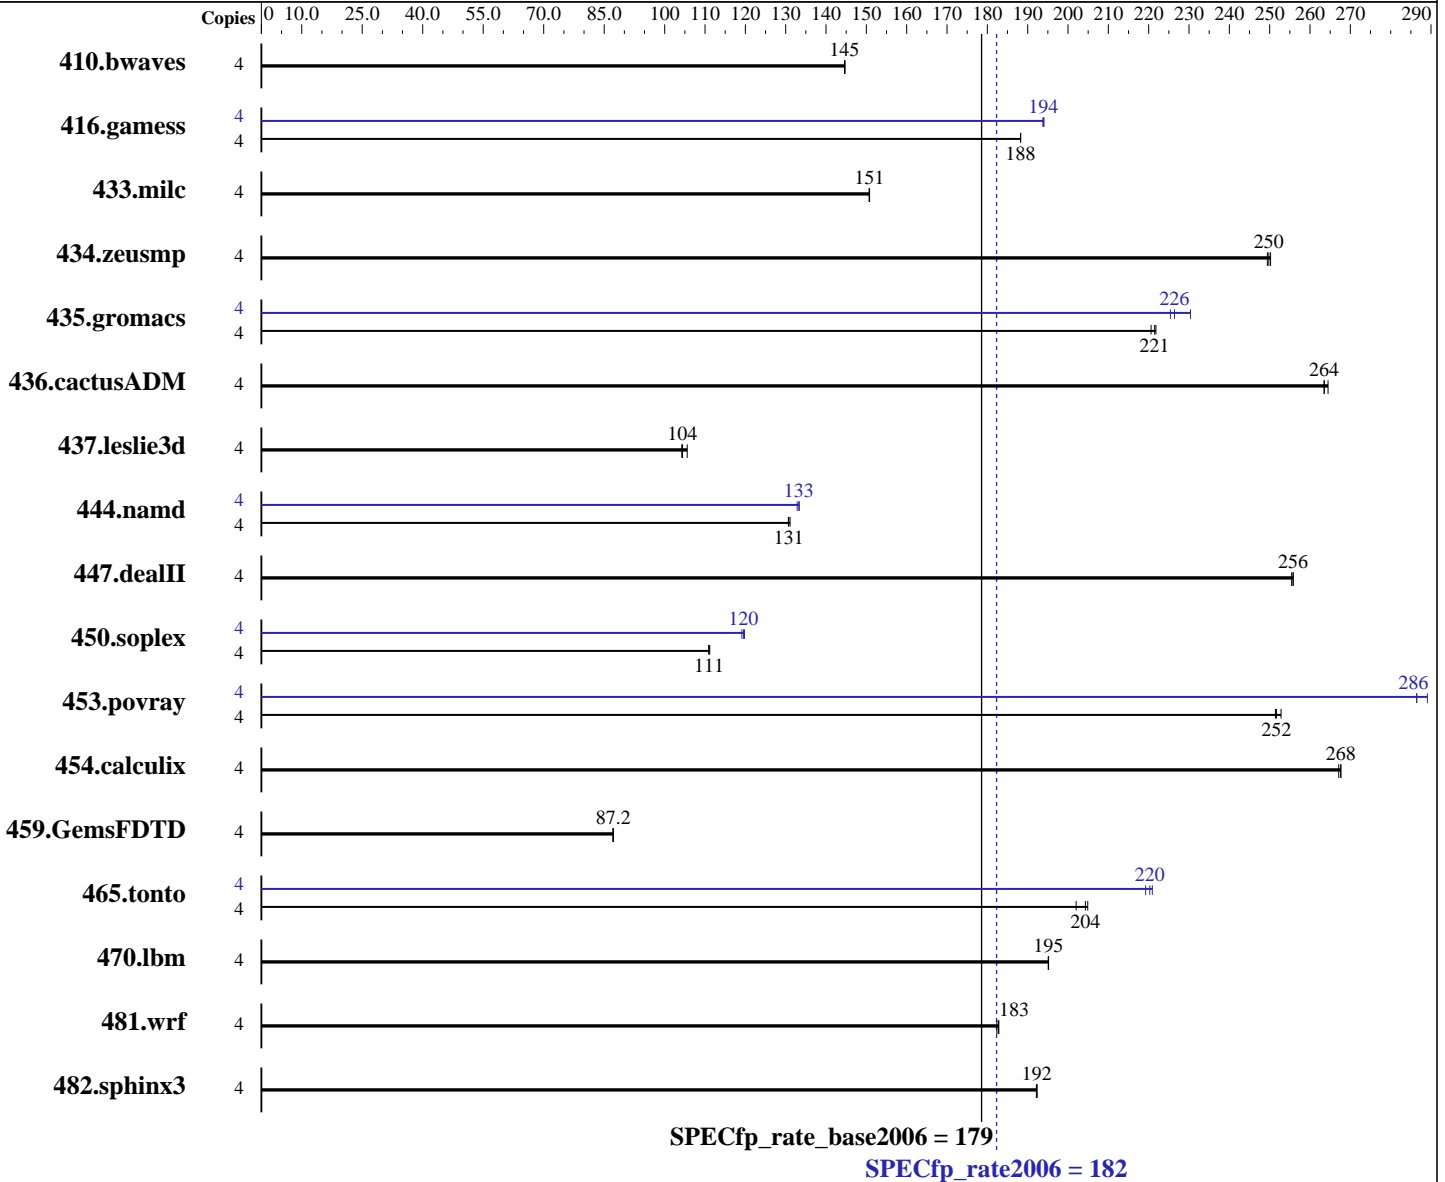

### Hardware

CPU Name: Intel Xeon E3-1225 v5  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-MT  
(X11SSH-TF , Intel Xeon E3-1225 v5)

SPECfp\_rate2006 = 182

SPECfp\_rate\_base2006 = 179

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-U)  
Disk Subsystem: 1 x 400 GB SATA III SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	376	145	<b><u>376</u></b>	<b><u>145</u></b>	376	145	4	376	145	<b><u>376</u></b>	<b><u>145</u></b>	376	145
416.gamess	4	416	188	416	188	<b><u>416</u></b>	<b><u>188</u></b>	4	404	194	<b><u>404</u></b>	<b><u>194</u></b>	404	194
433.milc	4	243	151	<b><u>244</u></b>	<b><u>151</u></b>	244	151	4	243	151	<b><u>244</u></b>	<b><u>151</u></b>	244	151
434.zeusmp	4	145	250	<b><u>146</u></b>	<b><u>250</u></b>	146	249	4	145	250	<b><u>146</u></b>	<b><u>250</u></b>	146	249
435.gromacs	4	129	222	<b><u>129</u></b>	<b><u>221</u></b>	129	221	4	124	230	<b><u>126</u></b>	<b><u>226</u></b>	127	225
436.cactusADM	4	<b><u>181</u></b>	<b><u>264</u></b>	181	264	181	263	4	<b><u>181</u></b>	<b><u>264</u></b>	181	264	181	263
437.leslie3d	4	356	106	361	104	<b><u>360</u></b>	<b><u>104</u></b>	4	356	106	361	104	<b><u>360</u></b>	<b><u>104</u></b>
444.namd	4	246	131	245	131	<b><u>245</u></b>	<b><u>131</u></b>	4	<b><u>241</u></b>	<b><u>133</u></b>	241	133	241	133
447.dealII	4	179	255	179	256	<b><u>179</u></b>	<b><u>256</u></b>	4	179	255	179	256	<b><u>179</u></b>	<b><u>256</u></b>
450.soplex	4	300	111	301	111	<b><u>301</u></b>	<b><u>111</u></b>	4	280	119	278	120	<b><u>279</u></b>	<b><u>120</u></b>
453.povray	4	84.6	251	<b><u>84.6</u></b>	<b><u>252</u></b>	84.2	253	4	<b><u>74.3</u></b>	<b><u>286</u></b>	74.3	286	73.6	289
454.calculix	4	123	268	124	267	<b><u>123</u></b>	<b><u>268</u></b>	4	123	268	124	267	<b><u>123</u></b>	<b><u>268</u></b>
459.GemsFDTD	4	486	87.3	487	87.2	<b><u>486</u></b>	<b><u>87.2</u></b>	4	486	87.3	487	87.2	<b><u>486</u></b>	<b><u>87.2</u></b>
465.tonto	4	<b><u>193</u></b>	<b><u>204</u></b>	195	202	192	205	4	<b><u>179</u></b>	<b><u>220</u></b>	180	219	178	221
470.lbm	4	282	195	282	195	<b><u>282</u></b>	<b><u>195</u></b>	4	282	195	282	195	<b><u>282</u></b>	<b><u>195</u></b>
481.wrf	4	245	182	<b><u>245</u></b>	<b><u>183</u></b>	244	183	4	245	182	<b><u>245</u></b>	<b><u>183</u></b>	244	183
482.sphinx3	4	405	192	406	192	<b><u>405</u></b>	<b><u>192</u></b>	4	405	192	406	192	<b><u>405</u></b>	<b><u>192</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Sun Jan 31 05:57:08 2016

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-MT  
(X11SSH-TF, Intel Xeon E3-1225 v5)

SPECfp\_rate2006 = 182

SPECfp\_rate\_base2006 = 179

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jan-2016  
**Hardware Availability:** Oct-2015  
**Software Availability:** Sep-2015

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1225 v5 @ 3.30GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16088396 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 31 00:54
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   280G  27G  253G  10% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-MT  
(X11SSH-TF , Intel Xeon E3-1225 v5)

SPECfp\_rate2006 = 182

SPECfp\_rate\_base2006 = 179

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Sep-2015

### Platform Notes (Continued)

BIOS American Megatrends Inc. T20160114140516 01/14/2016

Memory:

2x Micron 16ATF1G64AZ-2G1A2 8 GB 2 rank 2133 MHz  
2x Not Specified Not Specified

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB  
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-MT  
(X11SSH-TF , Intel Xeon E3-1225 v5)

SPECfp\_rate2006 = 182

SPECfp\_rate\_base2006 = 179

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Sep-2015

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64  
450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-MT  
(X11SSH-TF , Intel Xeon E3-1225 v5)

SPECfp\_rate2006 = 182

SPECfp\_rate\_base2006 = 179

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Sep-2015

## Peak Portability Flags (Continued)

434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes  
470.lbm: basepeak = yes  
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32  
447.dealII: basepeak = yes  
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3  
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019S-MT  
(X11SSH-TF , Intel Xeon E3-1225 v5)

**SPECfp\_rate2006 = 182**

**SPECfp\_rate\_base2006 = 179**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jan-2016  
**Hardware Availability:** Oct-2015  
**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

416.gamess: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 30 13:14:01 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 April 2016.