



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9
(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp®_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

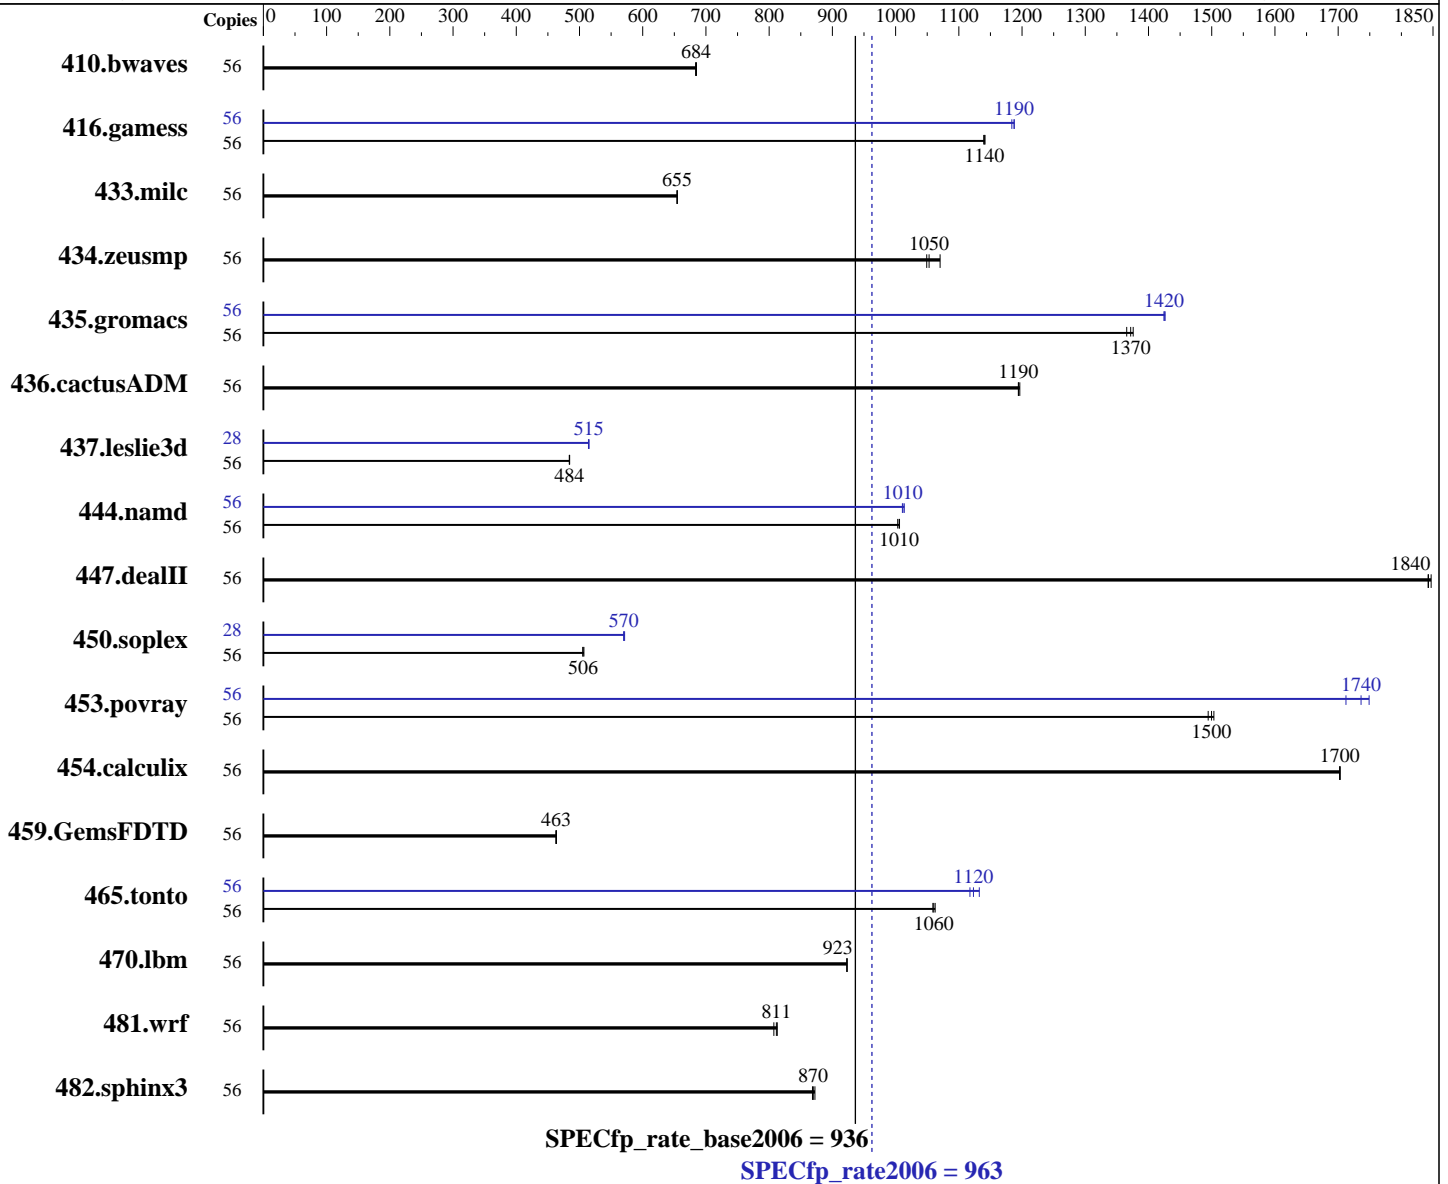

Hardware

CPU Name: Intel Xeon E5-2690 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 800 GB SAS SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	<u>1112</u>	<u>684</u>	1113	684	1111	685	56	<u>1112</u>	<u>684</u>	1113	684	1111	685
416.gamess	56	<u>961</u>	<u>1140</u>	961	1140	962	1140	56	926	1180	<u>923</u>	<u>1190</u>	923	1190
433.milc	56	786	654	785	655	<u>785</u>	<u>655</u>	56	786	654	785	655	<u>785</u>	<u>655</u>
434.zeusmp	56	476	1070	<u>484</u>	<u>1050</u>	486	1050	56	476	1070	<u>484</u>	<u>1050</u>	486	1050
435.gromacs	56	291	1380	<u>291</u>	<u>1370</u>	293	1370	56	<u>281</u>	<u>1420</u>	281	1420	280	1430
436.cactusADM	56	<u>560</u>	<u>1190</u>	559	1200	560	1190	56	<u>560</u>	<u>1190</u>	559	1200	560	1190
437.leslie3d	56	<u>1087</u>	<u>484</u>	1087	484	1088	484	28	512	514	511	515	<u>511</u>	<u>515</u>
444.namd	56	<u>447</u>	<u>1010</u>	448	1000	446	1010	56	444	1010	<u>444</u>	<u>1010</u>	443	1010
447.dealII	56	347	1850	348	1840	<u>348</u>	<u>1840</u>	56	347	1850	348	1840	<u>348</u>	<u>1840</u>
450.soplex	56	924	505	<u>924</u>	<u>506</u>	921	507	28	<u>409</u>	<u>570</u>	410	570	409	571
453.povray	56	198	1500	<u>199</u>	<u>1500</u>	199	1490	56	<u>172</u>	<u>1740</u>	174	1710	170	1750
454.calculix	56	271	1700	<u>271</u>	<u>1700</u>	271	1700	56	271	1700	<u>271</u>	<u>1700</u>	271	1700
459.GemsFDTD	56	1285	463	<u>1282</u>	<u>463</u>	1282	464	56	1285	463	<u>1282</u>	<u>463</u>	1282	464
465.tonto	56	<u>520</u>	<u>1060</u>	520	1060	519	1060	56	493	1120	<u>491</u>	<u>1120</u>	487	1130
470.lbm	56	<u>834</u>	<u>923</u>	833	923	834	923	56	<u>834</u>	<u>923</u>	833	923	834	923
481.wrf	56	770	813	<u>771</u>	<u>811</u>	775	807	56	770	813	<u>771</u>	<u>811</u>	775	807
482.sphinx3	56	1251	872	1257	868	<u>1255</u>	<u>870</u>	56	1251	872	1257	868	<u>1255</u>	<u>870</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes

BIOS Configuration:

Intel Hyperthreading Option set to Enabled
 Power Profile set to Custom
 Power Regulator set to Static High Performance Mode
 Minimum Processor Idle Power Core C-State set to C1E State
 Minimum Processor Idle Power Package C-State set to No Package State
 Collaborative Power Control set to Disabled
 QPI Snoop Configuration set to Cluster On Die
 Thermal Configuration set to Maximum Cooling
 Processor Power and Utilization Monitoring set to Disabled
 Memory Double Refresh Rate set to 1x Refresh
 Energy Performance Bias set to Maximum Performance

Sysinfo program

/home/specuser/cpu2006/HP_build_ic16_suite_corrected_int_bins/cpu2006/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-szds Sat Apr 16 10:21:34 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2690 v4@ 2.60GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 14
  siblings      : 28
  physical 0:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size     : 17920 KB
```

From /proc/meminfo

```
MemTotal:      529090292 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```

VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux linux-szds 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 16 10:02

```

SPEC is set to:
/home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   703G  279G  424G  40% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P92 03/23/2016

Memory:

8x UNKNOWN NOT AVAILABLE

16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:
16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = */home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006/libs/32:/home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006/libs/64:/home/specuser/cpu2006/HP_build_icl6_suite_corrected_int_bins/cpu2006/sh*

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint -auto-p32 -ansi-alias
-opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9
(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
-unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -static(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(2.60 GHz, Intel Xeon E5-2690 v4)

SPECfp_rate2006 = 963

SPECfp_rate_base2006 = 936

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 3 18:00:43 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 May 2016.