



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## SGI

**SPECint®\_rate2006 = 1280**

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

**SPECint\_rate\_base2006 = 1230**

CPU2006 license: 4


Test date: Jun-2016

Test sponsor: SGI

Hardware Availability: Mar-2016

Tested by: SGI

Software Availability: May-2016

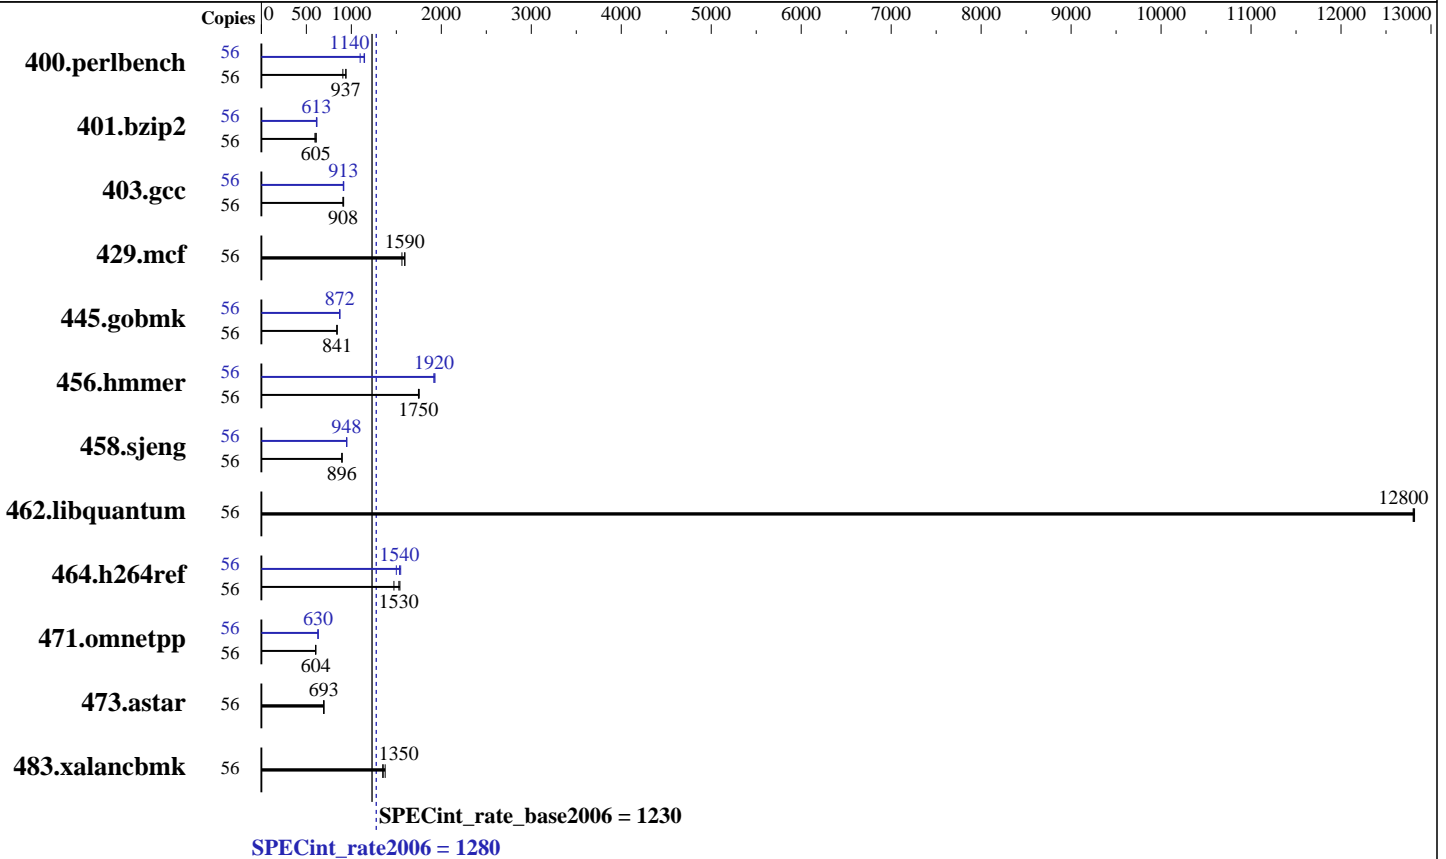

### Hardware

CPU Name: Intel Xeon E5-2680 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 500 GB SATA, 10K RPM  
 Other Hardware: None

### Software

Operating System: SuSE Enterprise Linux 12 (x86\_64) SP1, Kernel 3.12.57-60.35-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECint\_rate2006 = 1280

SPECint\_rate\_base2006 = 1230

CPU2006 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: Mar-2016  
Software Availability: May-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	581	941	604	906	<b>584</b>	<b>937</b>	56	498	1100	477	1150	<b>479</b>	<b>1140</b>
401.bzip2	56	886	610	908	595	<b>894</b>	<b>605</b>	56	875	618	<b>881</b>	<b>613</b>	883	612
403.gcc	56	<b>496</b>	<b>908</b>	497	908	493	914	56	492	916	<b>494</b>	<b>913</b>	495	910
429.mcf	56	320	1590	327	1560	<b>321</b>	<b>1590</b>	56	320	1590	327	1560	<b>321</b>	<b>1590</b>
445.gobmk	56	700	840	<b>699</b>	<b>841</b>	698	841	56	675	870	<b>674</b>	<b>872</b>	674	872
456.hammer	56	298	1750	<b>299</b>	<b>1750</b>	299	1750	56	271	1930	272	1920	<b>272</b>	<b>1920</b>
458.sjeng	56	756	896	756	896	<b>756</b>	<b>896</b>	56	714	949	<b>715</b>	<b>948</b>	715	947
462.libquantum	56	90.5	12800	90.6	12800	<b>90.6</b>	<b>12800</b>	56	90.5	12800	90.6	12800	<b>90.6</b>	<b>12800</b>
464.h264ref	56	805	1540	<b>811</b>	<b>1530</b>	841	1470	56	800	1550	<b>807</b>	<b>1540</b>	826	1500
471.omnetpp	56	<b>580</b>	<b>604</b>	580	603	579	604	56	<b>555</b>	<b>630</b>	556	629	555	631
473.astar	56	565	695	<b>567</b>	<b>693</b>	567	693	56	565	695	<b>567</b>	<b>693</b>	567	693
483.xalancbmk	56	281	1380	<b>285</b>	<b>1350</b>	286	1350	56	281	1380	<b>285</b>	<b>1350</b>	286	1350

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/store/draddatz/cpu2006/libs/32:/store/draddatz/cpu2006/libs/64:/store/draddatz/cpu2006/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECint\_rate2006 = 1280

SPECint\_rate\_base2006 = 1230

CPU2006 license: 4  
Test sponsor: SGI  
Tested by: SGI

Test date: Jun-2016  
Hardware Availability: Mar-2016  
Software Availability: May-2016

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

**SPECint\_rate2006 = 1280**

**SPECint\_rate\_base2006 = 1230**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Jun-2016

**Hardware Availability:** Mar-2016

**Software Availability:** May-2016

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
 401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`  
 403.gcc: `-D_FILE_OFFSET_BITS=64`  
 429.mcf: `-D_FILE_OFFSET_BITS=64`  
 445.gobmk: `-D_FILE_OFFSET_BITS=64`  
 456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`  
 458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`  
 462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`  
 464.h264ref: `-D_FILE_OFFSET_BITS=64`  
 471.omnetpp: `-D_FILE_OFFSET_BITS=64`  
 473.astar: `-D_FILE_OFFSET_BITS=64`  
 483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

**SPECint\_rate2006 = 1280**

**SPECint\_rate\_base2006 = 1230**

**CPU2006 license:** 4  
**Test sponsor:** SGI  
**Tested by:** SGI

**Test date:** Jun-2016  
**Hardware Availability:** Mar-2016  
**Software Availability:** May-2016

## Peak Optimization Flags (Continued)

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/SGI-platform.20160628.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/SGI-platform.20160628.xml>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

**SPECint\_rate2006 = 1280**

**SPECint\_rate\_base2006 = 1230**

**CPU2006 license:** 4

**Test sponsor:** SGI

**Tested by:** SGI

**Test date:** Jun-2016

**Hardware Availability:** Mar-2016

**Software Availability:** May-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 28 17:29:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 June 2016.