



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp®_rate2006 = 911

SPECfp_rate_base2006 = 888

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: May-2016

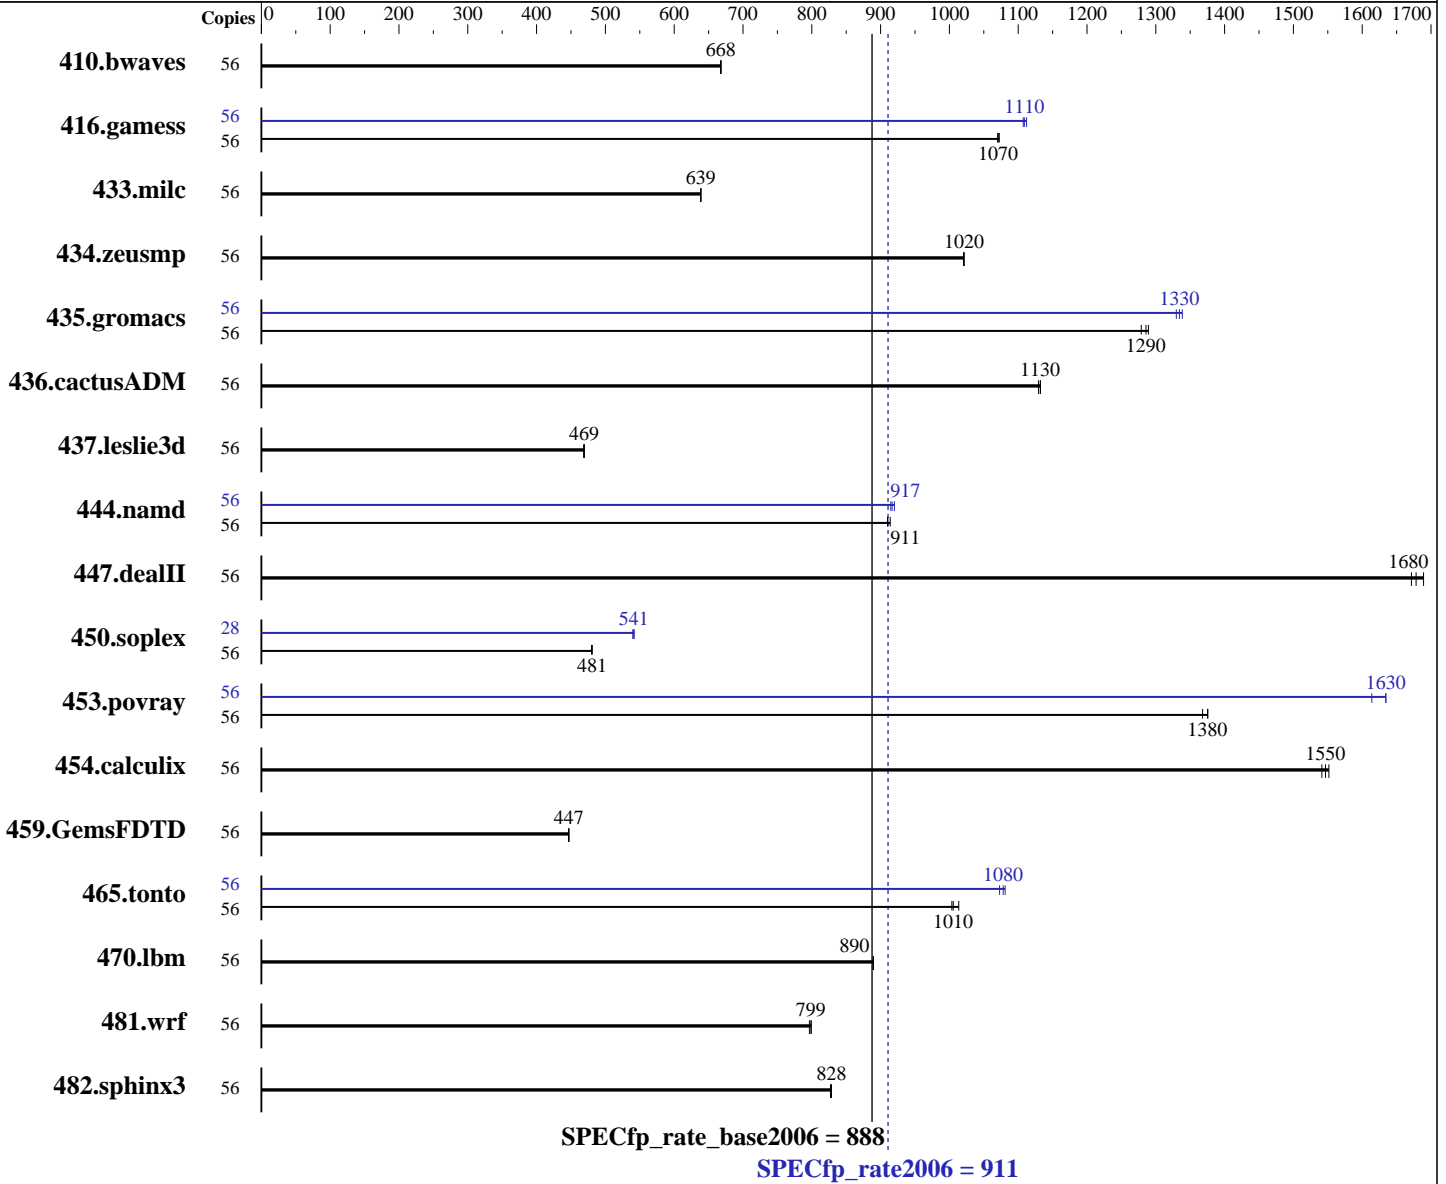

Hardware

CPU Name: Intel Xeon E5-2680 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Enterprise Linux 12 (x86_64) SP1, Kernel 3.12.57-60.35-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 911

SPECfp_rate_base2006 = 888

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: May-2016

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 500 GB SATA, 10K RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1139	668	1139	668	1140	667	56	1139	668	1139	668	1140	667
416.gamess	56	1022	1070	1025	1070	1024	1070	56	990	1110	989	1110	986	1110
433.milc	56	805	639	805	639	805	639	56	805	639	805	639	805	639
434.zeusmp	56	499	1020	499	1020	499	1020	56	499	1020	499	1020	499	1020
435.gromacs	56	311	1290	313	1280	310	1290	56	299	1340	301	1330	300	1330
436.cactusADM	56	591	1130	591	1130	592	1130	56	591	1130	591	1130	592	1130
437.leslie3d	56	1122	469	1124	468	1121	469	56	1122	469	1124	468	1121	469
444.namd	56	491	914	493	911	493	910	56	490	917	491	915	488	920
447.dealII	56	383	1670	379	1690	382	1680	56	383	1670	379	1690	382	1680
450.soplex	56	971	481	972	481	973	480	28	433	540	431	542	431	541
453.povray	56	217	1380	217	1380	218	1370	56	185	1610	182	1630	182	1630
454.calculix	56	300	1540	299	1550	298	1550	56	300	1540	299	1550	298	1550
459.GemsFDTD	56	1330	447	1331	446	1329	447	56	1330	447	1331	446	1329	447
465.tonto	56	549	1000	544	1010	548	1010	56	511	1080	510	1080	514	1070
470.lbm	56	865	890	865	890	865	889	56	865	890	865	890	865	889
481.wrf	56	785	797	783	799	783	799	56	785	797	783	799	783	799
482.sphinx3	56	1317	829	1317	828	1319	827	56	1317	829	1317	828	1319	827

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/store/draddatz/cpu2006/libs/32:/store/draddatz/cpu2006/libs/64:/store/draddatz/cpu2006/sh"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 911

SPECfp_rate_base2006 = 888

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: May-2016

General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 911

SPECfp_rate_base2006 = 888

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: May-2016

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 911

SPECfp_rate_base2006 = 888

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Jun-2016
Hardware Availability: Mar-2016
Software Availability: May-2016

Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SGI Rackable C1110-GP2 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECfp_rate2006 = 911

SPECfp_rate_base2006 = 888

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: May-2016

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/SGI-platform.20160628.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/SGI-platform.20160628.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 28 17:29:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 June 2016.