



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp[®]_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204


Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

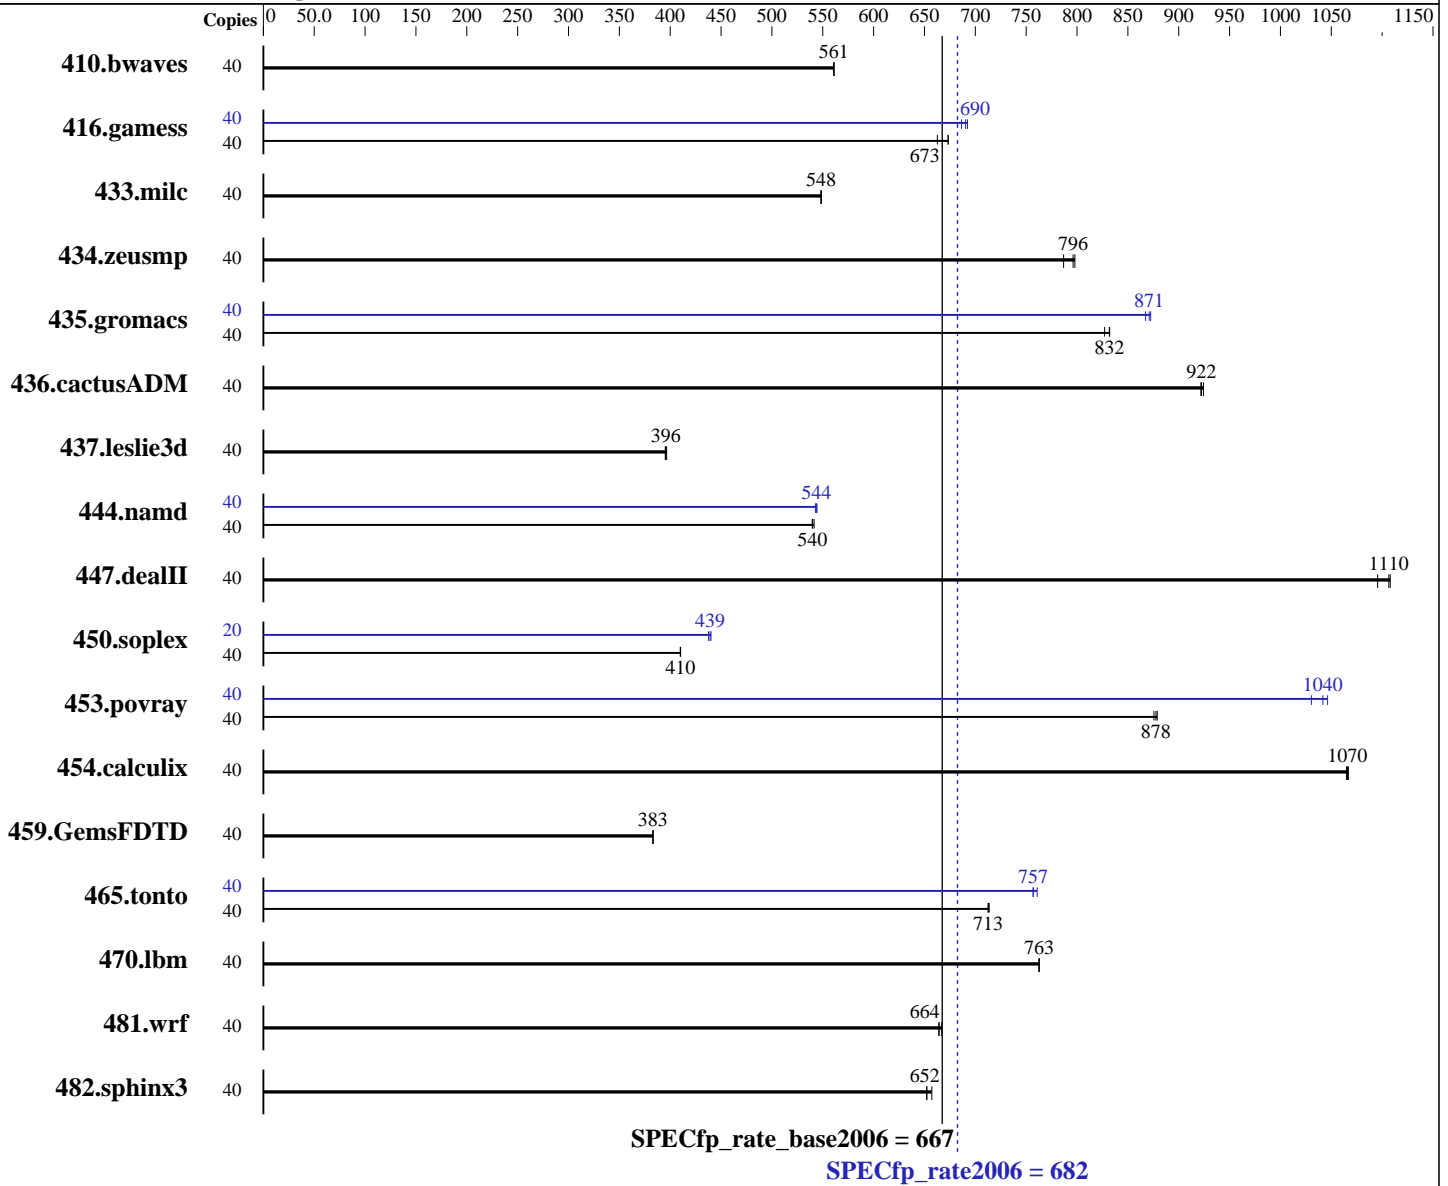

Hardware

CPU Name: Intel Xeon E5-2630 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: CentOS Linux release 7.2.1511 (Core)
 3.10.0-327.18.2.el7.x86_64
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 430 GB SATA SSHD
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	<u>969</u>	<u>561</u>	969	561	969	561	40	<u>969</u>	<u>561</u>	969	561	969	561
416.gamess	40	1182	663	<u>1163</u>	<u>673</u>	1163	673	40	1131	692	<u>1134</u>	<u>690</u>	1141	686
433.milc	40	670	548	669	548	<u>669</u>	<u>548</u>	40	670	548	669	548	<u>669</u>	<u>548</u>
434.zeusmp	40	456	798	463	787	<u>457</u>	<u>796</u>	40	456	798	463	787	<u>457</u>	<u>796</u>
435.gromacs	40	345	827	343	832	<u>343</u>	<u>832</u>	40	327	872	329	867	<u>328</u>	<u>871</u>
436.cactusADM	40	<u>518</u>	<u>922</u>	519	922	517	924	40	<u>518</u>	<u>922</u>	519	922	517	924
437.leslie3d	40	<u>950</u>	<u>396</u>	952	395	948	396	40	<u>950</u>	<u>396</u>	952	395	948	396
444.namd	40	592	541	594	540	<u>594</u>	<u>540</u>	40	<u>590</u>	<u>544</u>	591	543	589	544
447.dealII	40	418	1100	<u>414</u>	<u>1110</u>	413	1110	40	418	1100	<u>414</u>	<u>1110</u>	413	1110
450.soplex	40	<u>814</u>	<u>410</u>	814	410	813	410	20	381	438	379	440	<u>380</u>	<u>439</u>
453.povray	40	243	876	<u>242</u>	<u>878</u>	242	879	40	203	1050	<u>204</u>	<u>1040</u>	207	1030
454.calculix	40	310	1060	<u>310</u>	<u>1070</u>	309	1070	40	310	1060	<u>310</u>	<u>1070</u>	309	1070
459.GemsFDTD	40	<u>1108</u>	<u>383</u>	1108	383	1108	383	40	<u>1108</u>	<u>383</u>	1108	383	1108	383
465.tonto	40	<u>552</u>	<u>713</u>	552	713	552	714	40	<u>520</u>	<u>757</u>	517	761	520	757
470.lbm	40	<u>721</u>	<u>763</u>	720	763	721	763	40	<u>721</u>	<u>763</u>	720	763	721	763
481.wrf	40	<u>672</u>	<u>664</u>	673	664	670	667	40	<u>672</u>	<u>664</u>	673	664	670	667
482.sphinx3	40	1195	652	1186	657	<u>1195</u>	<u>652</u>	40	1195	652	1186	657	<u>1195</u>	<u>652</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Platform Notes

BIOS Configuration:

CPU and Power Performance Policy = Performance

Set Fan Profile = Performance

Fan PWM Offset = 100

Sysinfo program /spec/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (d0ff56c28028b704bda9287de9eee273)

running on grunt Sat Jun 18 06:08:42 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2630 v4 @ 2.20GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

cache size : 25600 KB

From /proc/meminfo

MemTotal: 263859080 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

centos-release: CentOS Linux release 7.2.1511 (Core)

centos-release-upstream: Derived from Red Hat Enterprise Linux 7.2 (Source)

os-release:

NAME="CentOS Linux"

VERSION="7 (Core)"

ID="centos"

ID_LIKE="rhel fedora"

VERSION_ID="7"

PRETTY_NAME="CentOS Linux 7 (Core)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:centos:centos:7"

redhat-release: CentOS Linux release 7.2.1511 (Core)

system-release: CentOS Linux release 7.2.1511 (Core)

system-release-cpe: cpe:/o:centos:centos:7

uname -a:

Linux grunt 3.10.0-327.18.2.el7.x86_64 #1 SMP Thu May 12 11:03:55 UTC 2016

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 18 06:08

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Platform Notes (Continued)

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	xfs	430G	15G	416G	4%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS SE5C610.86B.01.01.0016.033120161139 03/31/2016

Memory:

16x Kinston 9965662-004.A00G 16 GB 2 rank 2400 MHz, configured at 2134 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/opt/intel/compilers_and_libraries_2016.2.181/linux/compiler/lib/intel64_lin"

Binaries compiled on a system with 2x Intel Xeon E5-2630 v4 CPU + 256GB memory using CentOS 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

M Computers s.r.o.

SPECfp_rate2006 = 682

HPC HD S2600TPR (Intel Xeon E5-2630 v4, 2.2 GHz)

SPECfp_rate_base2006 = 667

CPU2006 license: 4204

Test date: Jun-2016

Test sponsor: M Computers s.r.o.

Hardware Availability: Mar-2016

Tested by: M Computers s.r.o.

Software Availability: Feb-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 12 11:03:17 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 July 2016.