



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp<sup>®</sup>\_rate2006 = 1050

SPECfp\_rate\_base2006 = 1020

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

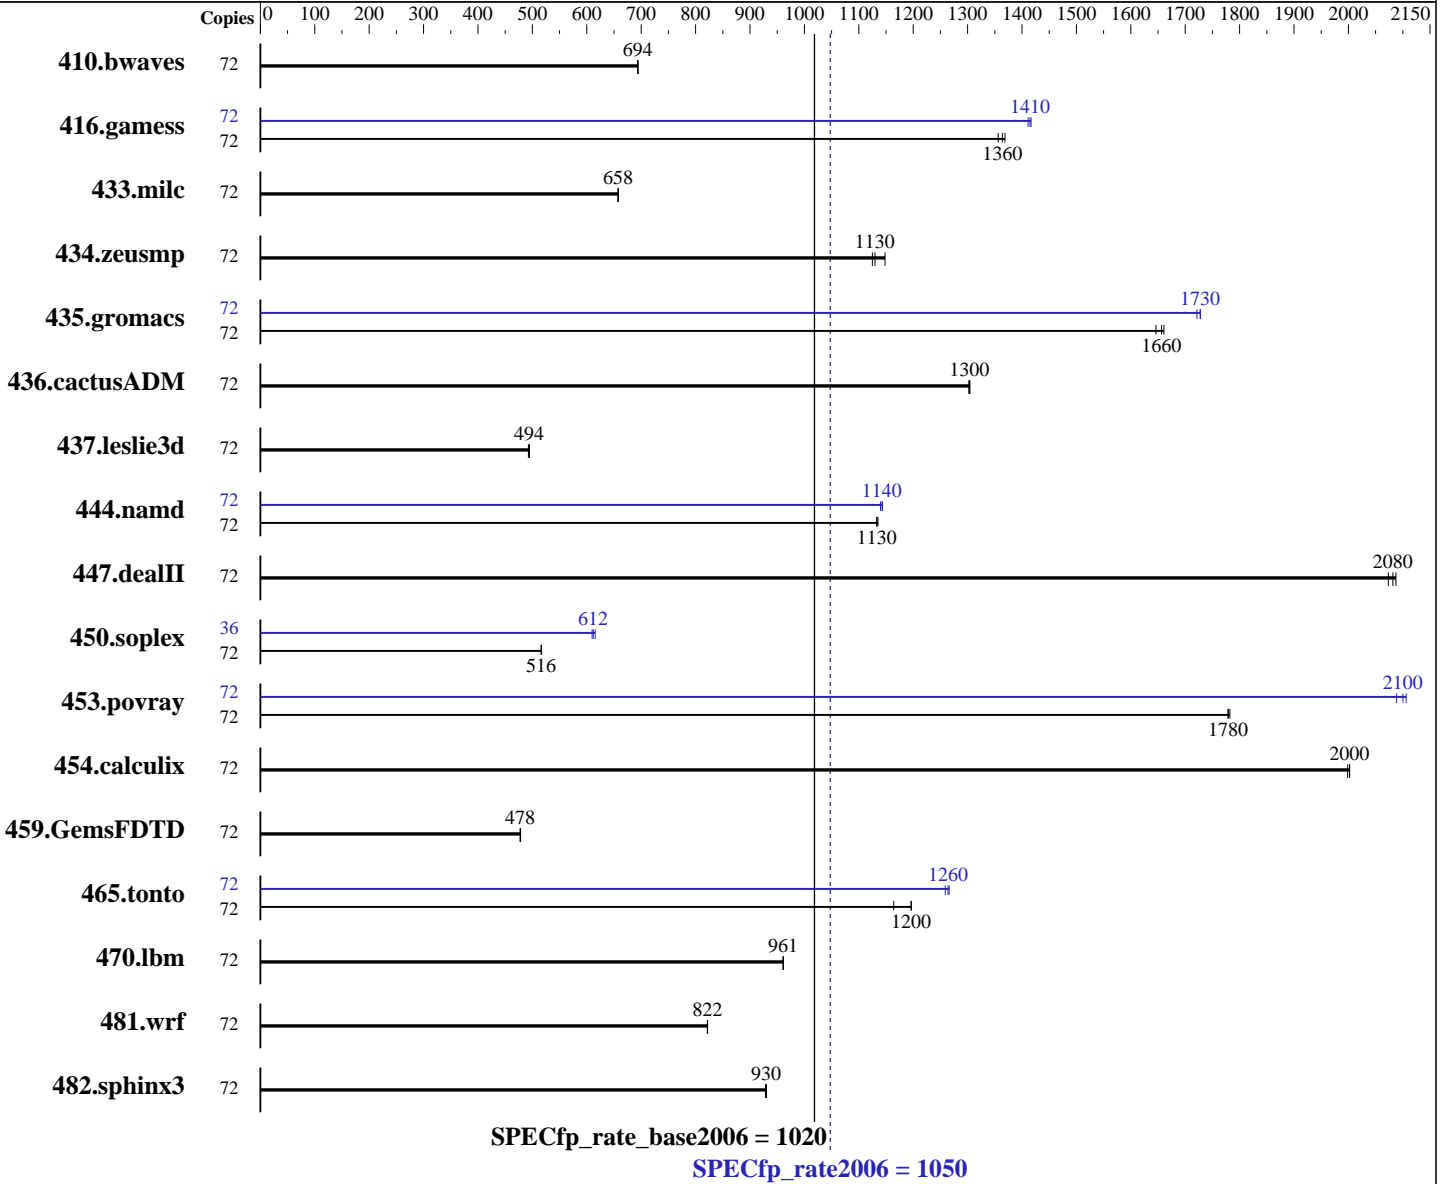

### Hardware

CPU Name: Intel Xeon E5-2697 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1050

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp\_rate\_base2006 = 1020

CPU2006 license: 9017

Test date: Jun-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	1410	694	<b><u>1410</u></b>	<b><u>694</u></b>	1410	694	72	1410	694	<b><u>1410</u></b>	<b><u>694</u></b>	1410	694
416.gamess	72	1030	1370	1039	1360	<b><u>1034</u></b>	<b><u>1360</u></b>	72	<b><u>996</u></b>	<b><u>1410</u></b>	999	1410	995	1420
433.milc	72	1005	658	<b><u>1005</u></b>	<b><u>658</u></b>	1005	657	72	1005	658	<b><u>1005</u></b>	<b><u>658</u></b>	1005	657
434.zeusmp	72	571	1150	582	1120	<b><u>580</u></b>	<b><u>1130</u></b>	72	571	1150	582	1120	<b><u>580</u></b>	<b><u>1130</u></b>
435.gromacs	72	310	1660	<b><u>310</u></b>	<b><u>1660</u></b>	312	1650	72	297	1730	<b><u>298</u></b>	<b><u>1730</u></b>	299	1720
436.cactusADM	72	660	1300	661	1300	<b><u>660</u></b>	<b><u>1300</u></b>	72	660	1300	661	1300	<b><u>660</u></b>	<b><u>1300</u></b>
437.leslie3d	72	1374	493	1368	495	<b><u>1369</u></b>	<b><u>494</u></b>	72	1374	493	1368	495	<b><u>1369</u></b>	<b><u>494</u></b>
444.namd	72	510	1130	509	1140	<b><u>510</u></b>	<b><u>1130</u></b>	72	505	1140	<b><u>505</u></b>	<b><u>1140</u></b>	507	1140
447.dealII	72	395	2090	397	2070	<b><u>396</u></b>	<b><u>2080</u></b>	72	395	2090	397	2070	<b><u>396</u></b>	<b><u>2080</u></b>
450.soplex	72	1162	517	<b><u>1163</u></b>	<b><u>516</u></b>	1163	516	36	<b><u>491</u></b>	<b><u>612</u></b>	492	610	488	615
453.povray	72	215	1780	<b><u>215</u></b>	<b><u>1780</u></b>	215	1780	72	182	2110	<b><u>182</u></b>	<b><u>2100</u></b>	183	2090
454.calculix	72	297	2000	<b><u>297</u></b>	<b><u>2000</u></b>	297	2000	72	297	2000	<b><u>297</u></b>	<b><u>2000</u></b>	297	2000
459.GemsFDTD	72	1597	478	<b><u>1599</u></b>	<b><u>478</u></b>	1599	478	72	1597	478	<b><u>1599</u></b>	<b><u>478</u></b>	1599	478
465.tonto	72	<b><u>592</u></b>	<b><u>1200</u></b>	609	1160	592	1200	72	563	1260	<b><u>560</u></b>	<b><u>1260</u></b>	560	1270
470.lbm	72	<b><u>1029</u></b>	<b><u>961</u></b>	1029	961	1029	961	72	<b><u>1029</u></b>	<b><u>961</u></b>	1029	961	1029	961
481.wrf	72	979	822	978	822	<b><u>979</u></b>	<b><u>822</u></b>	72	979	822	978	822	<b><u>979</u></b>	<b><u>822</u></b>
482.sphinx3	72	<b><u>1509</u></b>	<b><u>930</u></b>	1508	930	1511	929	72	<b><u>1509</u></b>	<b><u>930</u></b>	1508	930	1511	929

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1050

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp\_rate\_base2006 = 1020

CPU2006 license: 9017

Test date: Jun-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Platform Notes

### BIOS Configuration:

Operating Mode set to "Maximum Performance"

COD Preference set to Enable

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on NX360 Wed Jun 15 21:44:35 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2697 v4 @ 2.30GHz

2 "physical id"s (chips)

72 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

cache size : 23040 KB

### From /proc/meminfo

MemTotal: 263960348 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

### From /etc/\*release\* /etc/\*version\*

#### SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 1

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

#### os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION\_ID="12.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

### uname -a:

Linux NX360 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jun 15 10:25

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1050

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp\_rate\_base2006 = 1020

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

SPEC is set to: /home/cpu2006-1.2-ic16.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	690G	7.5G	683G	2%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[THE124GUS-2.10]- 04/28/2016

Memory:

16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1050

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp\_rate\_base2006 = 1020

CPU2006 license: 9017

Test date: Jun-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 1050**

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

**SPECfp\_rate\_base2006 = 1020**

**CPU2006 license:** 9017

**Test date:** Jun-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Mar-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Dec-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 1050

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp\_rate\_base2006 = 1020

CPU2006 license: 9017

Test date: Jun-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo NeXtScale nx360 M5  
(2.30 GHz, Intel Xeon E5-2697 v4)

SPECfp\_rate2006 = 1050

SPECfp\_rate\_base2006 = 1020

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jun-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 12 11:04:04 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 July 2016.