



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 3550

Express5800/A2040d (Intel Xeon E7-8890 v4)

SPECint_rate_base2006 = 3400

CPU2006 license: 9006


Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

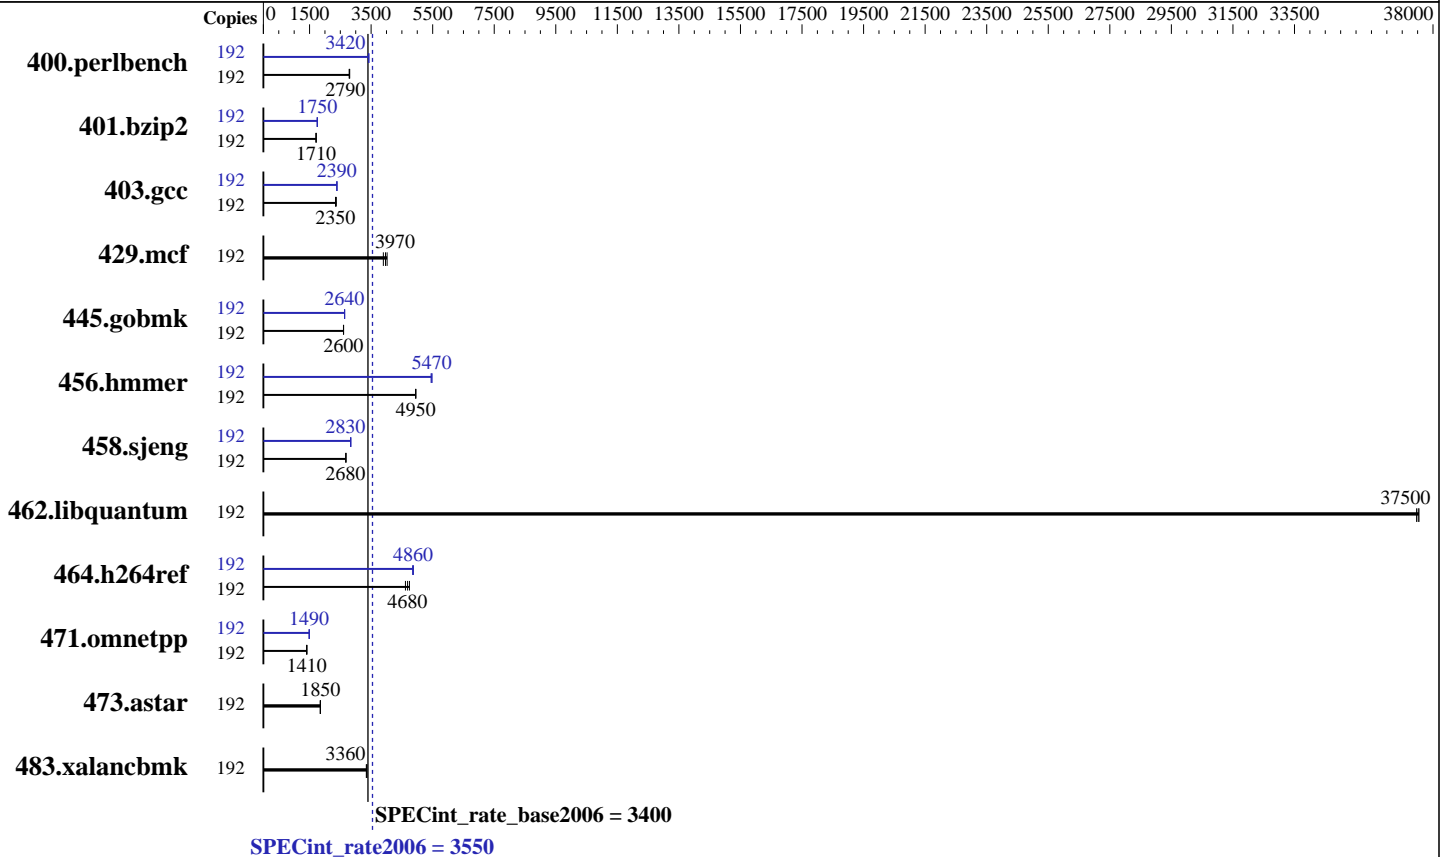

Hardware

CPU Name: Intel Xeon E7-8890 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip, 2 threads/core
 CPU(s) orderable: 2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 60 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64 x 8 GB 1Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 600 GB SAS, 15000 RPM, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.8 (Santiago)
 Kernel 2.6.32-642.el6.x86_64
 Compiler: C/C++: Version 16.0.0.109 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap Multi-Core V10.01



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 3550

Express5800/A2040d (Intel Xeon E7-8890 v4)

SPECint_rate_base2006 = 3400

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	672	2790	669	2800	672	2790	192	547	3430	550	3410	548	3420
401.bzip2	192	1084	1710	1080	1720	1081	1710	192	1061	1750	1056	1750	1056	1750
403.gcc	192	658	2350	660	2340	652	2370	192	648	2390	647	2390	646	2390
429.mcf	192	436	4020	441	3970	449	3900	192	436	4020	441	3970	449	3900
445.gobmk	192	774	2600	773	2610	773	2600	192	763	2640	762	2640	764	2640
456.hammer	192	362	4950	362	4950	362	4950	192	327	5470	327	5480	329	5450
458.sjeng	192	866	2680	867	2680	867	2680	192	817	2840	820	2830	820	2830
462.libquantum	192	106	37500	106	37500	106	37500	192	106	37500	106	37500	106	37500
464.h264ref	192	895	4750	921	4620	907	4680	192	876	4850	872	4870	873	4860
471.omnetpp	192	855	1400	853	1410	847	1420	192	807	1490	805	1490	805	1490
473.astar	192	730	1850	727	1850	728	1850	192	730	1850	727	1850	728	1850
483.xalancbmk	192	394	3360	394	3360	396	3340	192	394	3360	394	3360	396	3340

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Memory RAS Mode: Independent mode
VT-x : Disabled
Processor C6 Report : Disabled
OS Performance Tuning : Disabled
Energy Performance : Performance
Patrol Scrub : Disabled
Demand Scrub : Disabled
Memory P.E. Retry : Disabled

General Notes

Environment variables set by runspec before the start of the run:

ID_LIBRARY_PATH = */opt/SmartHeap_10mc/lib:/opt/SmartHeap_10mc/lib64:/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin:/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/intel64_lin*

Transparent Huge Pages enabled with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 3550

Express5800/A2040d (Intel Xeon E7-8890 v4)

SPECint_rate_base2006 = 3400

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

General Notes (Continued)

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs
-L/opt/SmartHeap_10mc/lib -lsmartheap

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 3550

Express5800/A2040d (Intel Xeon E7-8890 v4)

SPECint_rate_base2006 = 3400

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 3550

Express5800/A2040d (Intel Xeon E7-8890 v4)

SPECint_rate_base2006 = 3400

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_10mc/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040d-RevA.html>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 3550

Express5800/A2040d (Intel Xeon E7-8890 v4)

SPECint_rate_base2006 = 3400

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2016

Hardware Availability: Sep-2016

Software Availability: May-2016

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 4 14:49:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 October 2016.