



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp®_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358


Test date: Oct-2016

Test sponsor: Inspur Corporation

Hardware Availability: Jun-2016

Tested by: Intel Corporation

Software Availability: Aug-2016

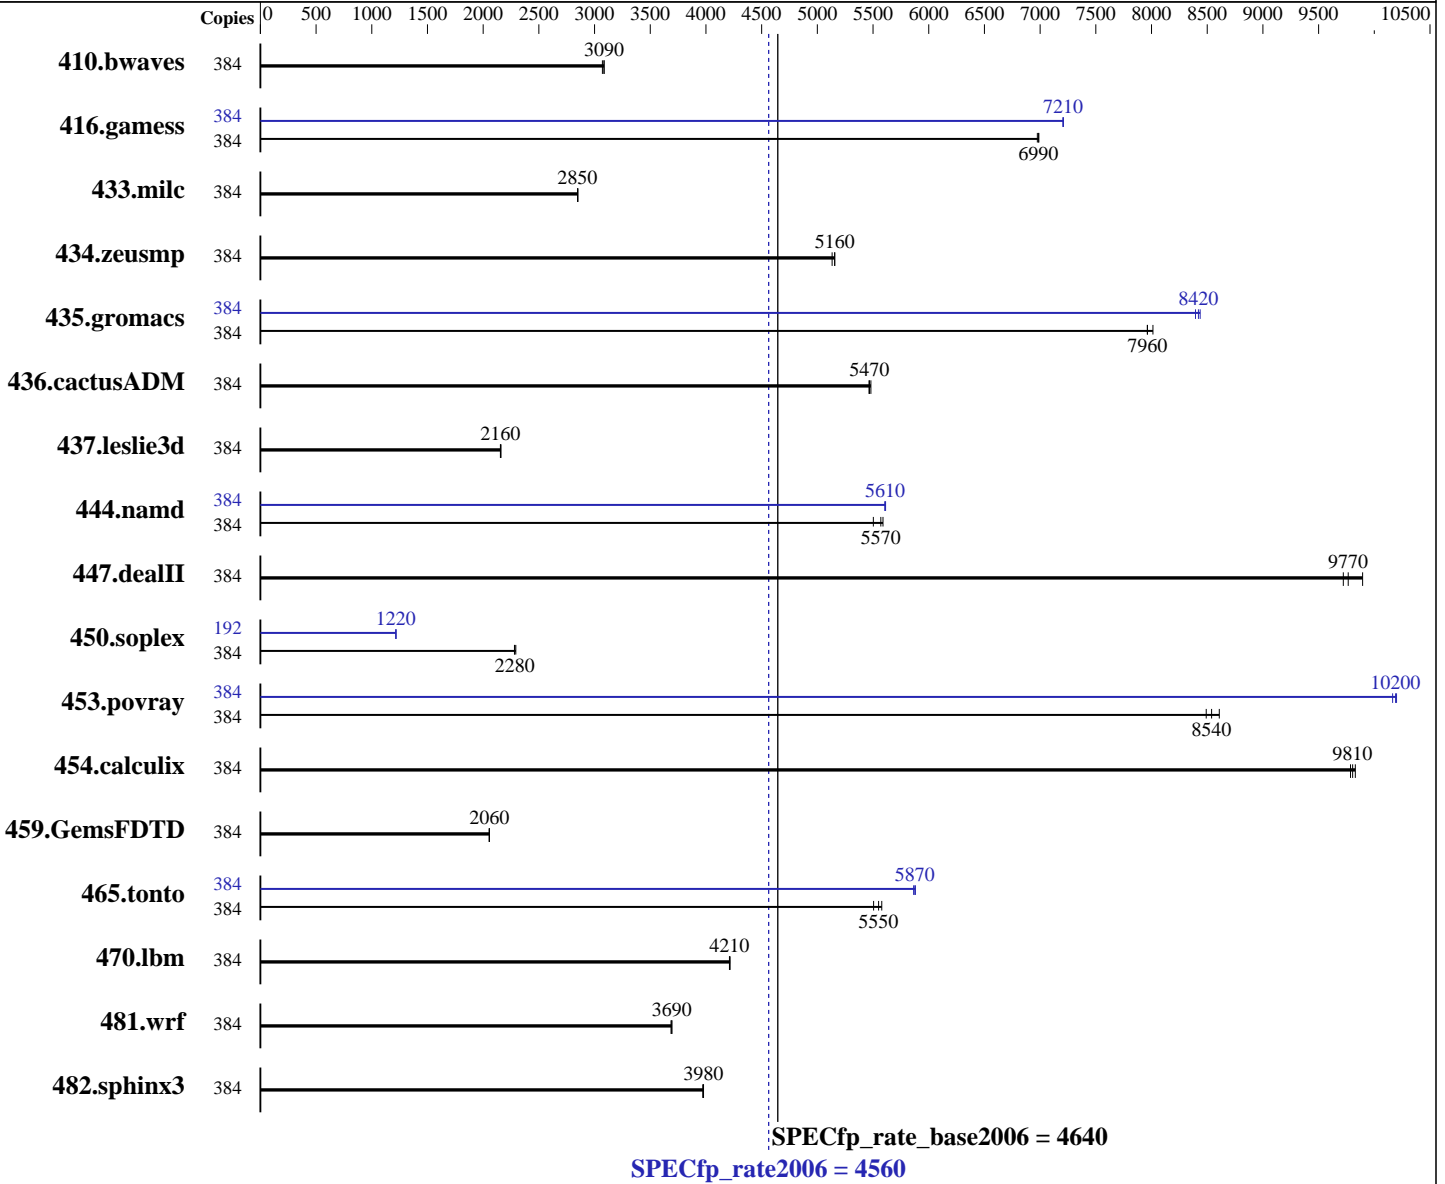

Hardware

CPU Name: Intel Xeon E7-8890 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 192 cores, 8 chips, 24 cores/chip, 2 threads/core
 CPU(s) orderable: 4,6,8 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Inspur K-UX release 3.0.5 (Inspur) 3.10.4-K_UX.x86_64
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358

Test date: Oct-2016

Test sponsor: Inspur Corporation

Hardware Availability: Jun-2016

Tested by: Intel Corporation

Software Availability: Aug-2016

L3 Cache: 60 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 4 x 600GB SAS, Raid 0
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	384	1700	3070	1691	3090	1692	3090	384	1700	3070	1691	3090	1692	3090		
416.gamess	384	1076	6990	1078	6970	1076	6990	384	1043	7210	1043	7210	1043	7210		
433.milc	384	1238	2850	1237	2850	1238	2850	384	1238	2850	1237	2850	1238	2850		
434.zeusmp	384	678	5160	678	5160	681	5130	384	678	5160	678	5160	681	5130		
435.gromacs	384	342	8010	344	7960	344	7960	384	325	8440	327	8390	326	8420		
436.cactusADM	384	839	5470	837	5480	840	5460	384	839	5470	837	5480	840	5460		
437.leslie3d	384	1675	2150	1671	2160	1674	2160	384	1675	2150	1671	2160	1674	2160		
444.namd	384	551	5590	553	5570	560	5500	384	549	5610	549	5610	549	5610		
447.dealII	384	444	9900	450	9770	452	9720	384	444	9900	450	9770	452	9720		
450.soplex	384	1404	2280	1397	2290	1402	2280	192	1316	1220	1317	1220	1315	1220		
453.povray	384	239	8540	241	8490	237	8610	384	200	10200	200	10200	201	10200		
454.calculix	384	322	9830	323	9810	324	9790	384	322	9830	323	9810	324	9790		
459.GemsFDTD	384	1982	2060	1981	2060	1984	2050	384	1982	2060	1981	2060	1984	2050		
465.tonto	384	677	5580	681	5550	686	5510	384	643	5880	644	5860	643	5870		
470.lbm	384	1253	4210	1253	4210	1251	4220	384	1253	4210	1253	4210	1251	4220		
481.wrf	384	1161	3690	1164	3690	1161	3690	384	1161	3690	1164	3690	1161	3690		
482.sphinx3	384	1881	3980	1885	3970	1882	3980	384	1881	3980	1885	3970	1882	3980		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Intel Corporation

Test date: Oct-2016

Hardware Availability: Jun-2016

Software Availability: Aug-2016

Platform Notes

BIOS and OS configuration:
 SCALING_GOVERNOR set to Performance
 Hardware Prefetch set to Disable
 VT Support set to Disable
 ClE Support set to Disable
 Sysinfo program /home/spec16/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on localhost.localdomain Mon Oct 17 08:41:40 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
 8 "physical id"s (chips)
384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 24
  siblings  : 48
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 61440 KB
```

```
From /proc/meminfo
MemTotal:      1056714488 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
inspur-release: Inspur K-UX release 3.0.5 (Inspur)
os-release:
  NAME="Inspur K-UX"
  VERSION="3 (Inspur)"
  ID="k-ux"
  VERSION_ID="3"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Intel Corporation

Test date: Oct-2016

Hardware Availability: Jun-2016

Software Availability: Aug-2016

Platform Notes (Continued)

```
PRETTY_NAME="Inspur K-UX 3 (Inspur)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:k-ux:k-ux:3"
HOME_URL="http://www.inspur.com/"
system-release: Inspur K-UX release 3.0.5 (Inspur)
system-release-cpe: cpe:/o:k-ux:k-ux:3
```

```
uname -a:
Linux localhost.localdomain 3.10.4-K_UX.x86_64 #1 SMP Fri Sep 30 11:06:29 GMT
2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
SPEC is set to: /home/spec16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/ik-home xfs  2.2T  12G  2.2T   1% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Inspur TS860G3_4.0.05 09/06/2016
Memory:
64x Hynix HMA42GR7AFR4N-TF 16 GB 2 rank , configured at 1600 MHz
128x NO DIMM Unknown
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/spec16/libs/32:/home/spec16/libs/64:/home/spec16/sh"

```
Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
memory using RedHat EL 7.2 glibc 2.17
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358

Test date: Oct-2016

Test sponsor: Inspur Corporation

Hardware Availability: Jun-2016

Tested by: Intel Corporation

Software Availability: Aug-2016

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358

Test date: Oct-2016

Test sponsor: Inspur Corporation

Hardware Availability: Jun-2016

Tested by: Intel Corporation

Software Availability: Aug-2016

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358

Test date: Oct-2016

Test sponsor: Inspur Corporation

Hardware Availability: Jun-2016

Tested by: Intel Corporation

Software Availability: Aug-2016

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 4560

Inspur TS860G3 (Intel Xeon E7-8890 v4)

SPECfp_rate_base2006 = 4640

CPU2006 license: 3358

Test date: Oct-2016

Test sponsor: Inspur Corporation

Hardware Availability: Jun-2016

Tested by: Intel Corporation

Software Availability: Aug-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 2 10:38:50 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 November 2016.