



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

**SPECint®2006 = 64.6**

Sugon TC6600/CB50-G20 (Intel Xeon E5-2680 v4)

**SPECint\_base2006 = 61.3**

CPU2006 license: 9046


Test date: Oct-2016

Test sponsor: Sugon

Hardware Availability: May-2016

Tested by: Sugon

Software Availability: Mar-2016

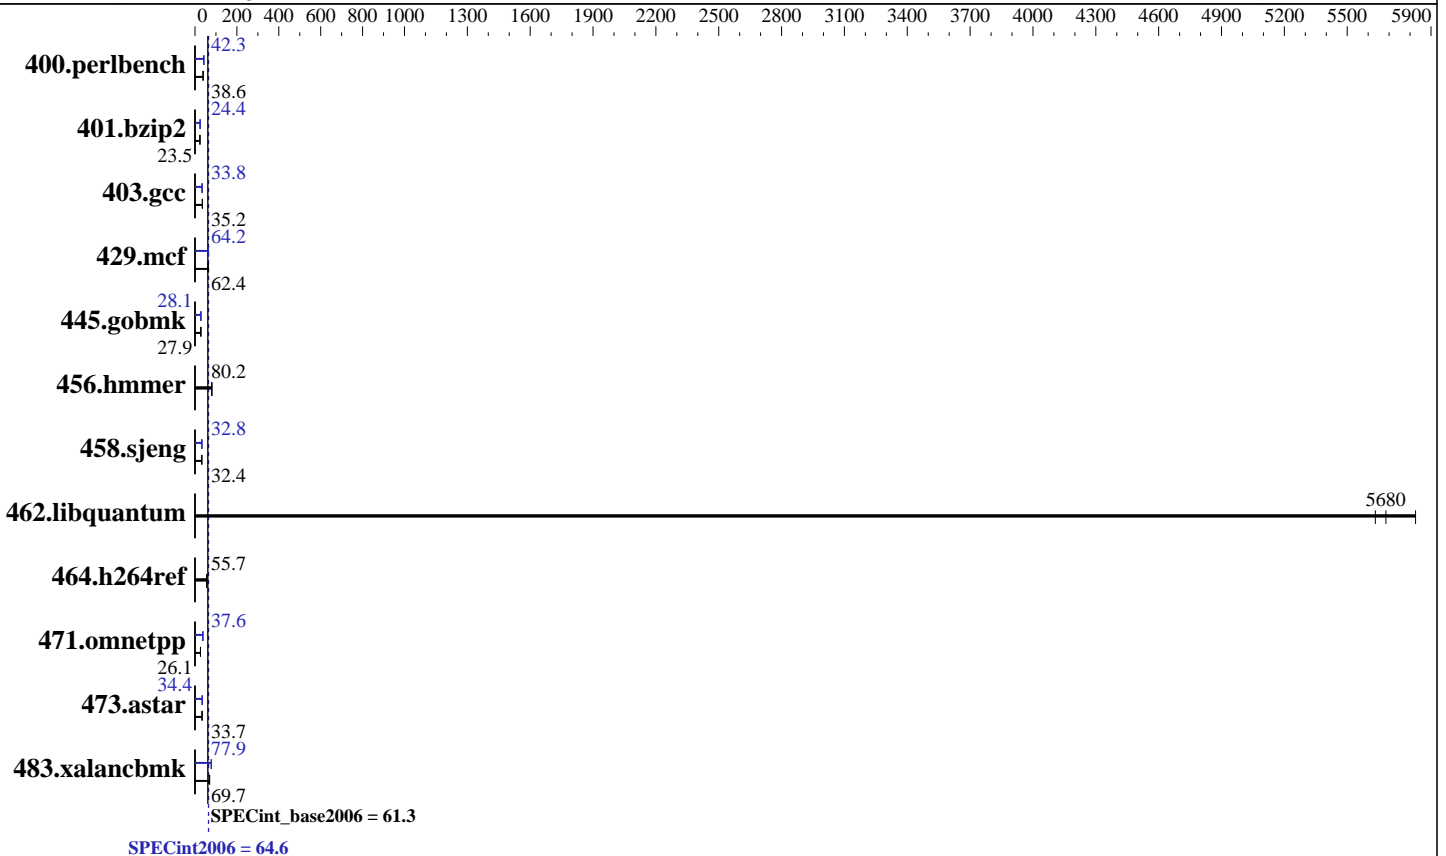

### Hardware

CPU Name: Intel Xeon E5-2680 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 2 x SATA, 300 GB, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECint2006 = **64.6**

Sugon TC6600/CB50-G20 (Intel Xeon E5-2680 v4)

SPECint\_base2006 = **61.3**

CPU2006 license: 9046  
Test sponsor: Sugon  
Tested by: Sugon

Test date: Oct-2016  
Hardware Availability: May-2016  
Software Availability: Mar-2016

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	252	38.7	254	38.5	<u>253</u>	<u>38.6</u>	231	42.3	232	42.2	<u>231</u>	<u>42.3</u>
401.bzip2	409	23.6	<u>411</u>	<u>23.5</u>	411	23.5	395	24.4	<u>395</u>	<u>24.4</u>	395	24.4
403.gcc	229	35.2	<u>229</u>	<u>35.2</u>	228	35.3	<u>238</u>	<u>33.8</u>	237	34.0	240	33.6
429.mcf	147	62.1	146	62.4	<u>146</u>	<u>62.4</u>	141	64.6	<u>142</u>	<u>64.2</u>	142	64.1
445.gobmk	<u>376</u>	<u>27.9</u>	375	28.0	376	27.9	373	28.1	373	28.2	<u>373</u>	<u>28.1</u>
456.hammer	116	80.3	116	80.1	<u>116</u>	<u>80.2</u>	116	80.3	116	80.1	<u>116</u>	<u>80.2</u>
458.sjeng	374	32.4	374	32.3	<u>374</u>	<u>32.4</u>	<u>369</u>	<u>32.8</u>	369	32.8	370	32.7
462.libquantum	<u>3.64</u>	<u>5680</u>	3.68	5630	3.56	5830	<u>3.64</u>	<u>5680</u>	3.68	5630	3.56	5830
464.h264ref	<u>397</u>	<u>55.7</u>	397	55.7	397	55.7	<u>397</u>	<u>55.7</u>	397	55.7	397	55.7
471.omnetpp	238	26.2	240	26.1	<u>240</u>	<u>26.1</u>	<u>166</u>	<u>37.6</u>	167	37.4	166	37.6
473.astar	210	33.5	<u>208</u>	<u>33.7</u>	207	33.9	205	34.3	<u>204</u>	<u>34.4</u>	204	34.5
483.xalancbmk	<u>99.0</u>	<u>69.7</u>	104	66.3	98.8	69.8	88.7	77.8	<u>88.6</u>	<u>77.9</u>	88.6	77.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

This System is electrically equal to TC4600E/CB50-G20

BIOS Configuration:

Hyper-Threading set to Enabled

Set Fan Speed to Full Speed

Sysinfo program /benchmarks/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on c1302 Wed Oct 26 20:57:30 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2680 v4@ 2.40GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

**SPECint2006 = 64.6**

Sugon TC6600/CB50-G20 (Intel Xeon E5-2680 v4)

**SPECint\_base2006 = 61.3**

**CPU2006 license:** 9046  
**Test sponsor:** Sugon  
**Tested by:** Sugon

**Test date:** Oct-2016  
**Hardware Availability:** May-2016  
**Software Availability:** Mar-2016

### Platform Notes (Continued)

```
cpu cores : 14
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      264040064 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux c1302 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 26 17:38
```

```
SPEC is set to: /benchmarks/cpu2006
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda2        ext4      544G      89G  428G  18% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 5.11 05/18/2016
Memory:
16x Hynix Semiconductor HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 64.6

Sugon TC6600/CB50-G20 (Intel Xeon E5-2680 v4)

SPECint\_base2006 = 61.3

CPU2006 license: 9046

Test date: Oct-2016

Test sponsor: Sugon

Hardware Availability: May-2016

Tested by: Sugon

Software Availability: Mar-2016

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/benchmarks/cpu2006/libs/32:/benchmarks/cpu2006/libs/64:/benchmarks/cpu2006/sh"

OMP\_NUM\_THREADS = "28"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32

-Wl,-z,muldefs -L/sh -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Sugon**

**SPECint2006 = 64.6**

Sugon TC6600/CB50-G20 (Intel Xeon E5-2680 v4)

**SPECint\_base2006 = 61.3**

**CPU2006 license:** 9046  
**Test sponsor:** Sugon  
**Tested by:** Sugon

**Test date:** Oct-2016  
**Hardware Availability:** May-2016  
**Software Availability:** Mar-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

**SPECint2006 = 64.6**

Sugon TC6600/CB50-G20 (Intel Xeon E5-2680 v4)

**SPECint\_base2006 = 61.3**

**CPU2006 license:** 9046

**Test date:** Oct-2016

**Test sponsor:** Sugon

**Hardware Availability:** May-2016

**Tested by:** Sugon

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

401.bzip2 (continued):

`-opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc`

`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel`

`-opt-prefetch -auto-p32`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`

`-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias`

456.hmmcr: basepeak = yes

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`

`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`

`-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4`

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`

`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`

`-par-num-threads=1(pass 1) -prof-use(pass 2)`

`-opt-ra-region-strategy=block`

`-ansi-alias`

`-Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

`-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64`

483.xalancbmk: `-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

`-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.html>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

**SPECint2006 = 64.6**

Sugon TC6600/CB50-G20 (Intel Xeon E5-2680 v4)

**SPECint\_base2006 = 61.3**

**CPU2006 license:** 9046

**Test sponsor:** Sugon

**Tested by:** Sugon

**Test date:** Oct-2016

**Hardware Availability:** May-2016

**Software Availability:** Mar-2016

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Nov 15 16:06:14 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 November 2016.