



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]2006 = **92.8**

Lenovo System x3250 M6
(3.00 GHz, Intel Xeon E3-1220 v5)

SPECfp_base2006 = **90.8**

CPU2006 license: 9017


Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

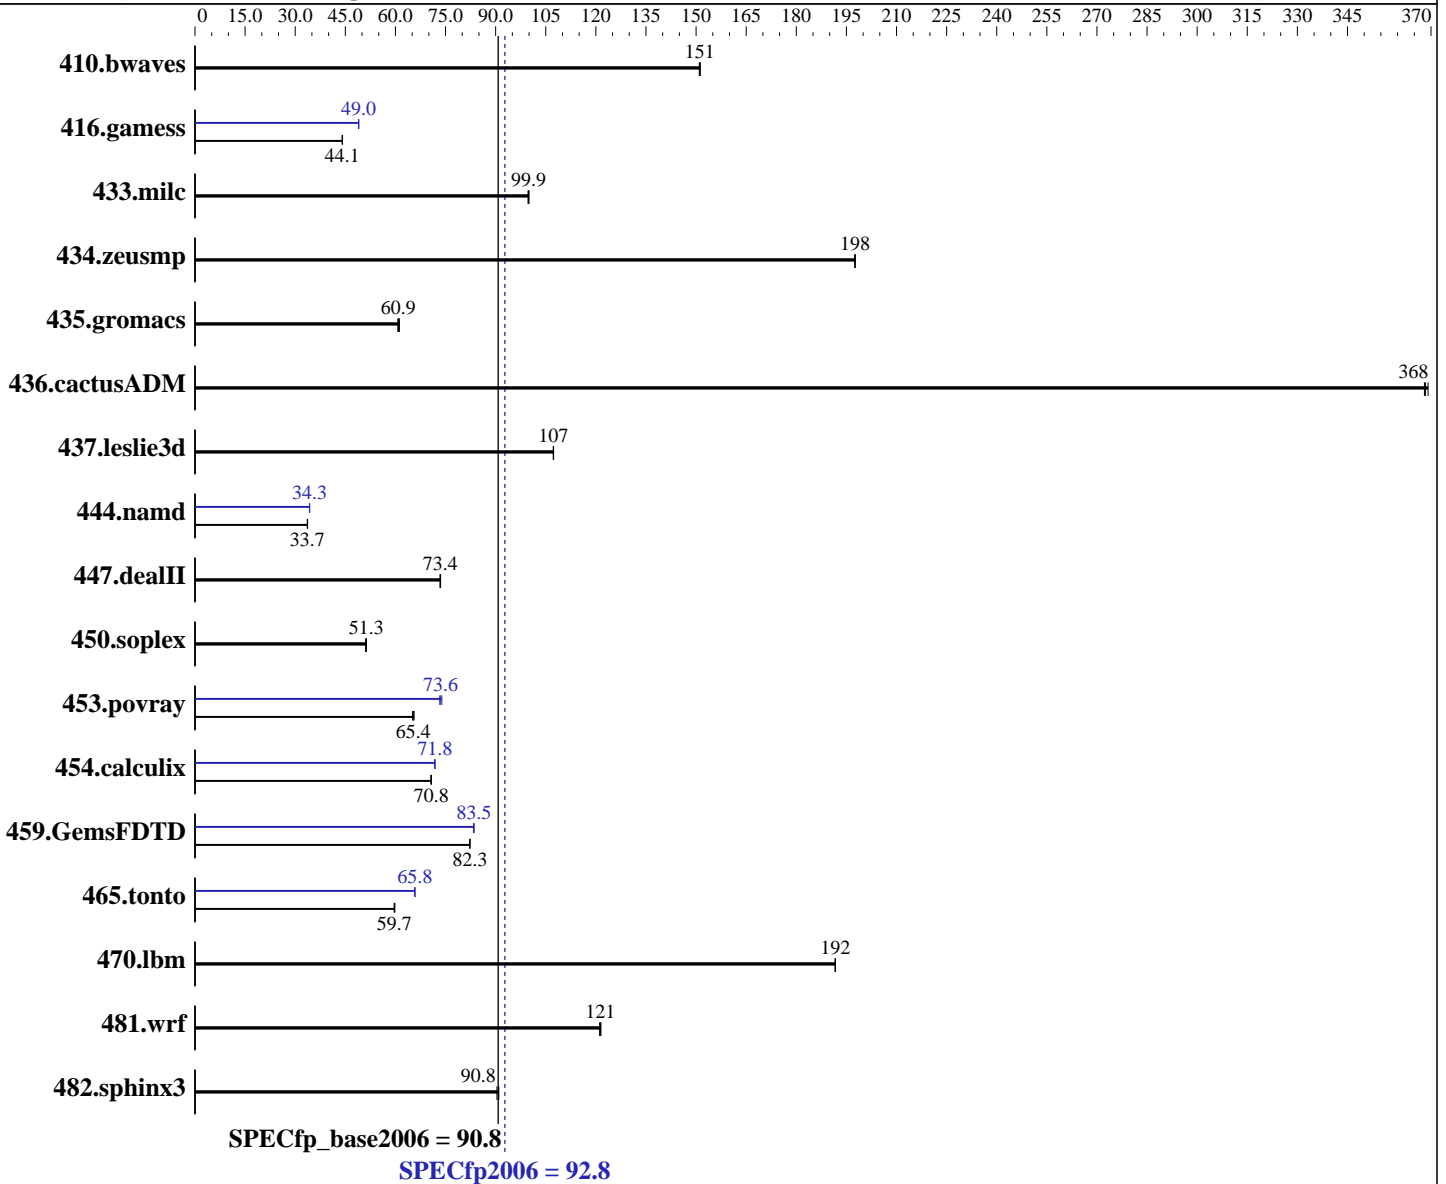

Hardware

CPU Name: Intel Xeon E3-1220 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **92.8**

Lenovo System x3250 M6
(3.00 GHz, Intel Xeon E3-1220 v5)

SPECfp_base2006 = **90.8**

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)
Disk Subsystem: 1 x 240 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	89.9	151	90.0	151	89.8	151	89.9	151	90.0	151	89.8	151
416.gamess	443	44.2	444	44.1	445	44.0	400	49.0	399	49.0	400	49.0
433.milc	91.9	99.9	92.1	99.7	91.8	100	91.9	99.9	92.1	99.7	91.8	100
434.zeusmp	46.0	198	46.1	198	46.1	198	46.0	198	46.1	198	46.1	198
435.gromacs	117	61.2	118	60.7	117	60.9	117	61.2	118	60.7	117	60.9
436.cactusADM	32.5	368	32.4	368	32.4	369	32.5	368	32.4	368	32.4	369
437.leslie3d	87.6	107	87.6	107	87.7	107	87.6	107	87.6	107	87.7	107
444.namd	238	33.7	238	33.6	238	33.7	234	34.3	234	34.3	234	34.3
447.dealII	156	73.4	156	73.4	156	73.5	156	73.4	156	73.4	156	73.5
450.soplex	163	51.3	163	51.1	163	51.3	163	51.3	163	51.1	163	51.3
453.povray	81.4	65.4	81.7	65.1	81.1	65.6	72.3	73.6	72.0	73.9	72.6	73.3
454.calculix	117	70.8	117	70.6	117	70.8	115	71.8	115	71.8	115	71.7
459.GemsFDTD	129	82.3	129	82.3	129	82.3	127	83.5	127	83.4	127	83.5
465.tonto	164	59.8	165	59.7	165	59.7	149	65.8	149	65.8	150	65.8
470.lbm	71.7	192	71.7	192	71.7	192	71.7	192	71.7	192	71.7	192
481.wrf	92.0	121	92.2	121	91.9	121	92.0	121	92.2	121	91.9	121
482.sphinx3	215	90.8	214	91.0	216	90.4	215	90.8	214	91.0	216	90.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
Operating Modes set to Maximum Performance
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on TS150 Tue Nov 22 18:39:46 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 92.8

Lenovo System x3250 M6
(3.00 GHz, Intel Xeon E3-1220 v5)

SPECfp_base2006 = 90.8

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1220 v5 @ 3.00GHz
1 "physical id"s (chips)
4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal: 16421272 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
```

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux TS150 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 22 14:07

SPEC is set to: /home/cpu2006-1.2-ic16.0

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 170G 15G 155G 9% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 92.8

Lenovo System x3250 M6
(3.00 GHz, Intel Xeon E3-1220 v5)

SPECfp_base2006 = 90.8

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Platform Notes (Continued)

BIOS LENOVO -[M3E107GUS-1.20]- 10/28/2016

Memory:

2x NO DIMM Unknown

2x Samsung M391A1G43EB1-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 92.8

Lenovo System x3250 M6
(3.00 GHz, Intel Xeon E3-1220 v5)

SPECfp_base2006 = 90.8

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 92.8

Lenovo System x3250 M6
(3.00 GHz, Intel Xeon E3-1220 v5)

SPECfp_base2006 = 90.8

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 92.8

Lenovo System x3250 M6
(3.00 GHz, Intel Xeon E3-1220 v5)

SPECfp_base2006 = 90.8

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 15 11:18:25 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.