



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

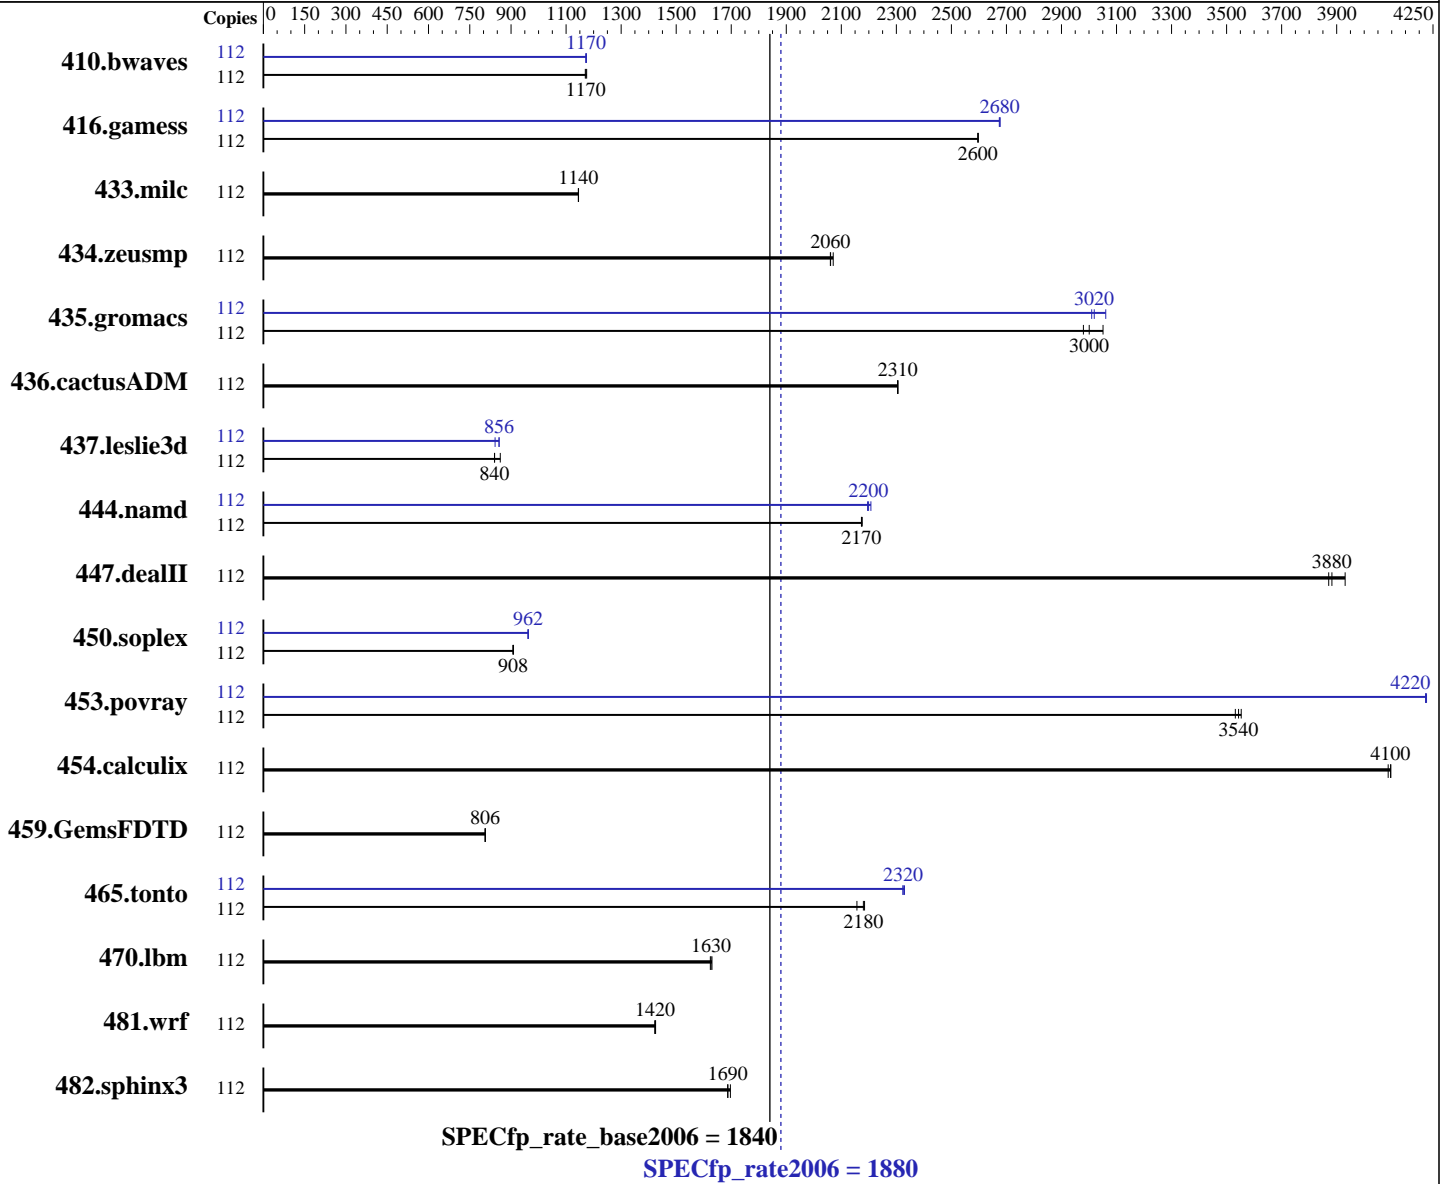

### Hardware

CPU Name: Intel Xeon Platinum 8180  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86\_64) 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

L3 Cache: 38.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 1200 GB SAS, 10000 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	1296	1170	1301	1170	<u>1299</u>	<u>1170</u>	112	1299	1170	<u>1297</u>	<u>1170</u>	1297	1170
416.gamess	112	844	2600	845	2600	<u>845</u>	<u>2600</u>	112	820	2670	<u>819</u>	<u>2680</u>	819	2680
433.milc	112	898	1150	<u>898</u>	<u>1140</u>	898	1140	112	898	1150	<u>898</u>	<u>1140</u>	898	1140
434.zeusmp	112	495	2060	<u>495</u>	<u>2060</u>	492	2070	112	495	2060	<u>495</u>	<u>2060</u>	492	2070
435.gromacs	112	268	2980	262	3050	<u>266</u>	<u>3000</u>	112	<u>265</u>	<u>3020</u>	261	3060	266	3010
436.cactusADM	112	581	2300	<u>581</u>	<u>2310</u>	580	2310	112	581	2300	<u>581</u>	<u>2310</u>	580	2310
437.leslie3d	112	1223	861	1254	840	<u>1253</u>	<u>840</u>	112	1250	842	<u>1230</u>	<u>856</u>	1229	857
444.namd	112	<u>413</u>	<u>2170</u>	413	2170	413	2180	112	<u>408</u>	<u>2200</u>	407	2210	409	2200
447.dealII	112	<u>330</u>	<u>3880</u>	331	3870	326	3930	112	<u>330</u>	<u>3880</u>	331	3870	326	3930
450.soplex	112	1028	909	1030	907	<u>1029</u>	<u>908</u>	112	<u>971</u>	<u>962</u>	971	962	970	963
453.povray	112	169	3530	168	3550	<u>168</u>	<u>3540</u>	112	141	4220	<u>141</u>	<u>4220</u>	141	4230
454.calculix	112	226	4100	<u>226</u>	<u>4100</u>	226	4090	112	226	4100	<u>226</u>	<u>4100</u>	226	4090
459.GemsFDTD	112	1474	806	1475	806	<u>1474</u>	<u>806</u>	112	1474	806	1475	806	<u>1474</u>	<u>806</u>
465.tonto	112	505	2180	511	2160	<u>505</u>	<u>2180</u>	112	<u>474</u>	<u>2320</u>	473	2330	474	2320
470.lbm	112	947	1620	<u>946</u>	<u>1630</u>	944	1630	112	947	1620	<u>946</u>	<u>1630</u>	944	1630
481.wrf	112	878	1430	<u>879</u>	<u>1420</u>	880	1420	112	878	1430	<u>879</u>	<u>1420</u>	880	1420
482.sphinx3	112	1286	1700	1294	1690	<u>1293</u>	<u>1690</u>	112	1286	1700	1294	1690	<u>1293</u>	<u>1690</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set SNC to Enable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2017  
Hardware Availability: Jul-2017  
Software Availability: Nov-2016

## Platform Notes (Continued)

Set IMC Interleaving to 1 way  
Set Patrol Scrub to Disable  
Set the fan speed to 100% full speed  
Sysinfo program /spec17/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-hyq4 Wed May 24 20:04:04 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 2 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 28
  siblings       : 56
  physical 0:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                  25 26 27 28 29 30
  physical 1:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                  25 26 27 28 29 30
cache size      : 39424 KB
```

From /proc/meminfo

```
MemTotal:        394148168 kB
HugePages_Total: 0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-hyq4 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: May-2017  
Hardware Availability: Jul-2017  
Software Availability: Nov-2016

## Platform Notes (Continued)

run-level 3 May 24 09:42

SPEC is set to: /spec17

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	828G	115G	714G	14%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.10 03/09/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -fno-alias -auto-ilp32  
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 1880

Huawei CH121 V5 (Intel Xeon Platinum 8180)

SPECfp\_rate\_base2006 = 1840

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 13 12:51:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 July 2017.