



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECint®2006 = 82.8

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECint_base2006 = 79.6

CPU2006 license: 9066


Test date: Sep-2017

Test sponsor: H3C

Hardware Availability: Jul-2017

Tested by: H3C

Software Availability: Apr-2017

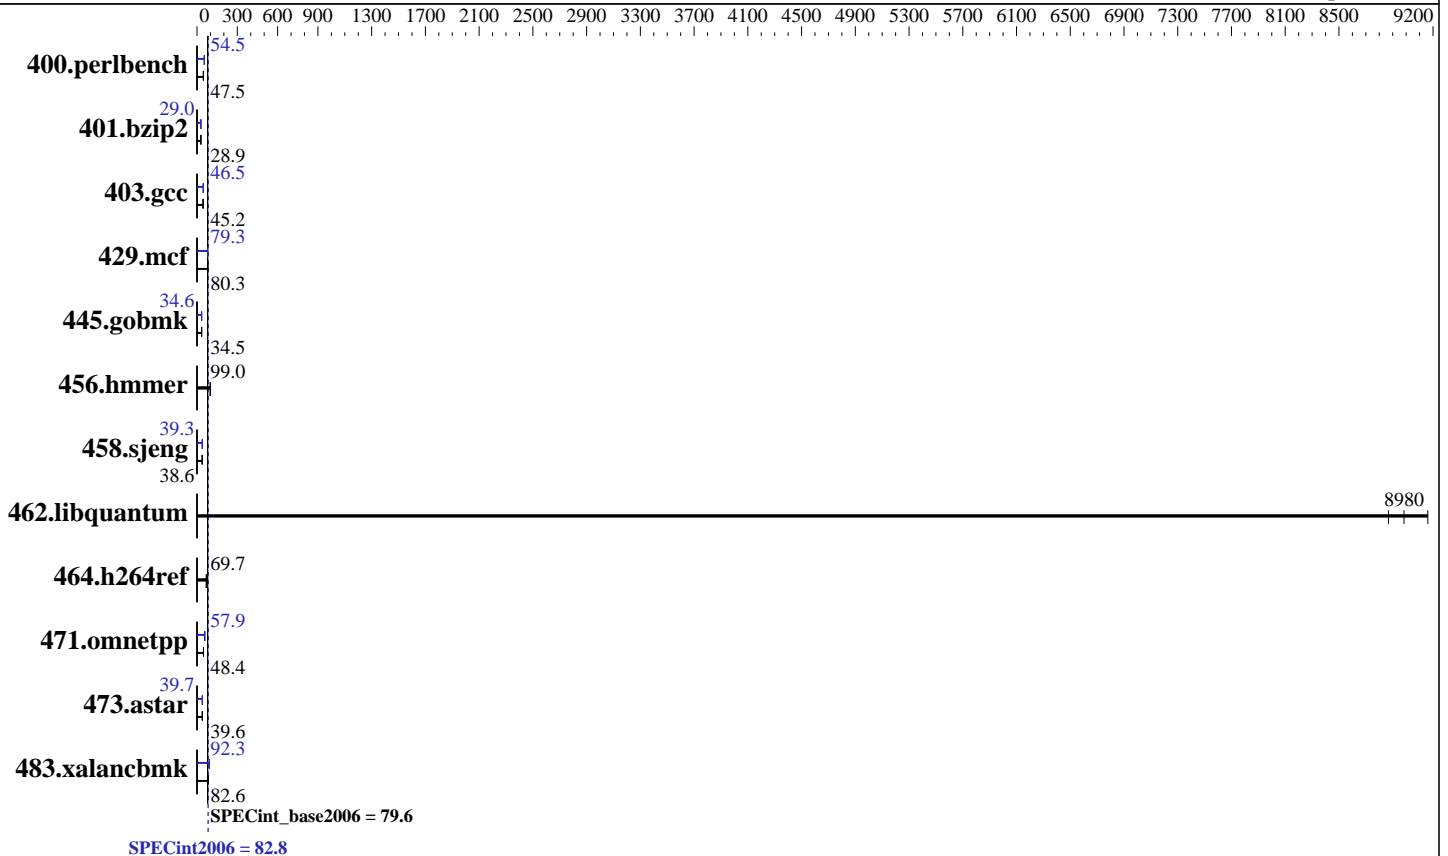

Hardware

CPU Name: Intel Xeon Platinum 8180
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 480 GB SATA SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.26.2.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECint2006 = **82.8**

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECint_base2006 = **79.6**

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	205	47.8	<u>205</u>	<u>47.5</u>	206	47.5	181	53.9	<u>179</u>	<u>54.5</u>	179	54.5
401.bzip2	<u>334</u>	<u>28.9</u>	335	28.8	334	28.9	333	29.0	333	29.0	<u>333</u>	<u>29.0</u>
403.gcc	178	45.2	178	45.2	<u>178</u>	<u>45.2</u>	<u>173</u>	<u>46.5</u>	174	46.4	173	46.5
429.mcf	115	79.1	<u>114</u>	<u>80.3</u>	113	81.0	115	79.4	116	78.6	<u>115</u>	<u>79.3</u>
445.gobmk	<u>304</u>	<u>34.5</u>	304	34.5	304	34.6	304	34.6	303	34.6	<u>303</u>	<u>34.6</u>
456.hammer	<u>94.2</u>	<u>99.0</u>	94.3	98.9	94.1	99.1	<u>94.2</u>	<u>99.0</u>	94.3	98.9	94.1	99.1
458.sjeng	314	38.5	314	38.6	<u>314</u>	<u>38.6</u>	308	39.3	<u>308</u>	<u>39.3</u>	308	39.3
462.libquantum	<u>2.31</u>	<u>8980</u>	2.26	9160	2.34	8870	<u>2.31</u>	<u>8980</u>	2.26	9160	2.34	8870
464.h264ref	319	69.4	317	69.8	<u>317</u>	<u>69.7</u>	319	69.4	317	69.8	<u>317</u>	<u>69.7</u>
471.omnetpp	<u>129</u>	<u>48.4</u>	129	48.3	129	48.4	109	57.2	107	58.2	<u>108</u>	<u>57.9</u>
473.astar	178	39.5	176	39.9	<u>177</u>	<u>39.6</u>	177	39.6	<u>177</u>	<u>39.7</u>	176	39.8
483.xalancbmk	83.6	82.6	83.4	82.7	<u>83.5</u>	<u>82.6</u>	75.6	91.3	74.4	92.7	<u>74.7</u>	<u>92.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set SNC to Disabled
Set Hyper-Threading to disabled
Set Patrol Scrub to disabled
Set C1E to disabled
Sysinfo program /home/spec/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Sun Sep 3 04:00:08 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
2 "physical id"s (chips)
56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECint2006 = 82.8

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECint_base2006 = 79.6

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Platform Notes (Continued)

caution.)

cpu cores : 28

siblings : 28

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30

cache size : 39424 KB

From /proc/meminfo

MemTotal: 394654688 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.3 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.3"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-514.26.2.el7.x86_64 #1 SMP Tue Jul 4
15:04:05 UTC 2017 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 2 03:22

SPEC is set to: /home/spec

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 xfs 439G 40G 399G 10% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.00.17 08/01/2017

Memory:

24x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECint2006 = 82.8

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECint_base2006 = 79.6

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/spec/lib/ia32:/home/spec/lib/intel64:/home/spec/sh10.2"

OMP_NUM_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECint2006 = 82.8

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECint_base2006 = 79.6

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -auto-ilp32 -qopt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECint2006 = 82.8

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECint_base2006 = 79.6

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)

456.hmmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-SKL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-SKL-V1.1.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

H3C

SPECint2006 = 82.8

H3C UniServer R4900 G3 (Intel Xeon Platinum 8180)

SPECint_base2006 = 79.6

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: Sep-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 20 11:01:40 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.