



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 976**

Huawei 2288H V5 (Intel Xeon Gold 6144)

**SPECfp\_rate\_base2006 = 956**

CPU2006 license: 3175


Test date: Aug-2017

Test sponsor: Huawei

Hardware Availability: Sep-2017

Tested by: Huawei

Software Availability: Nov-2016

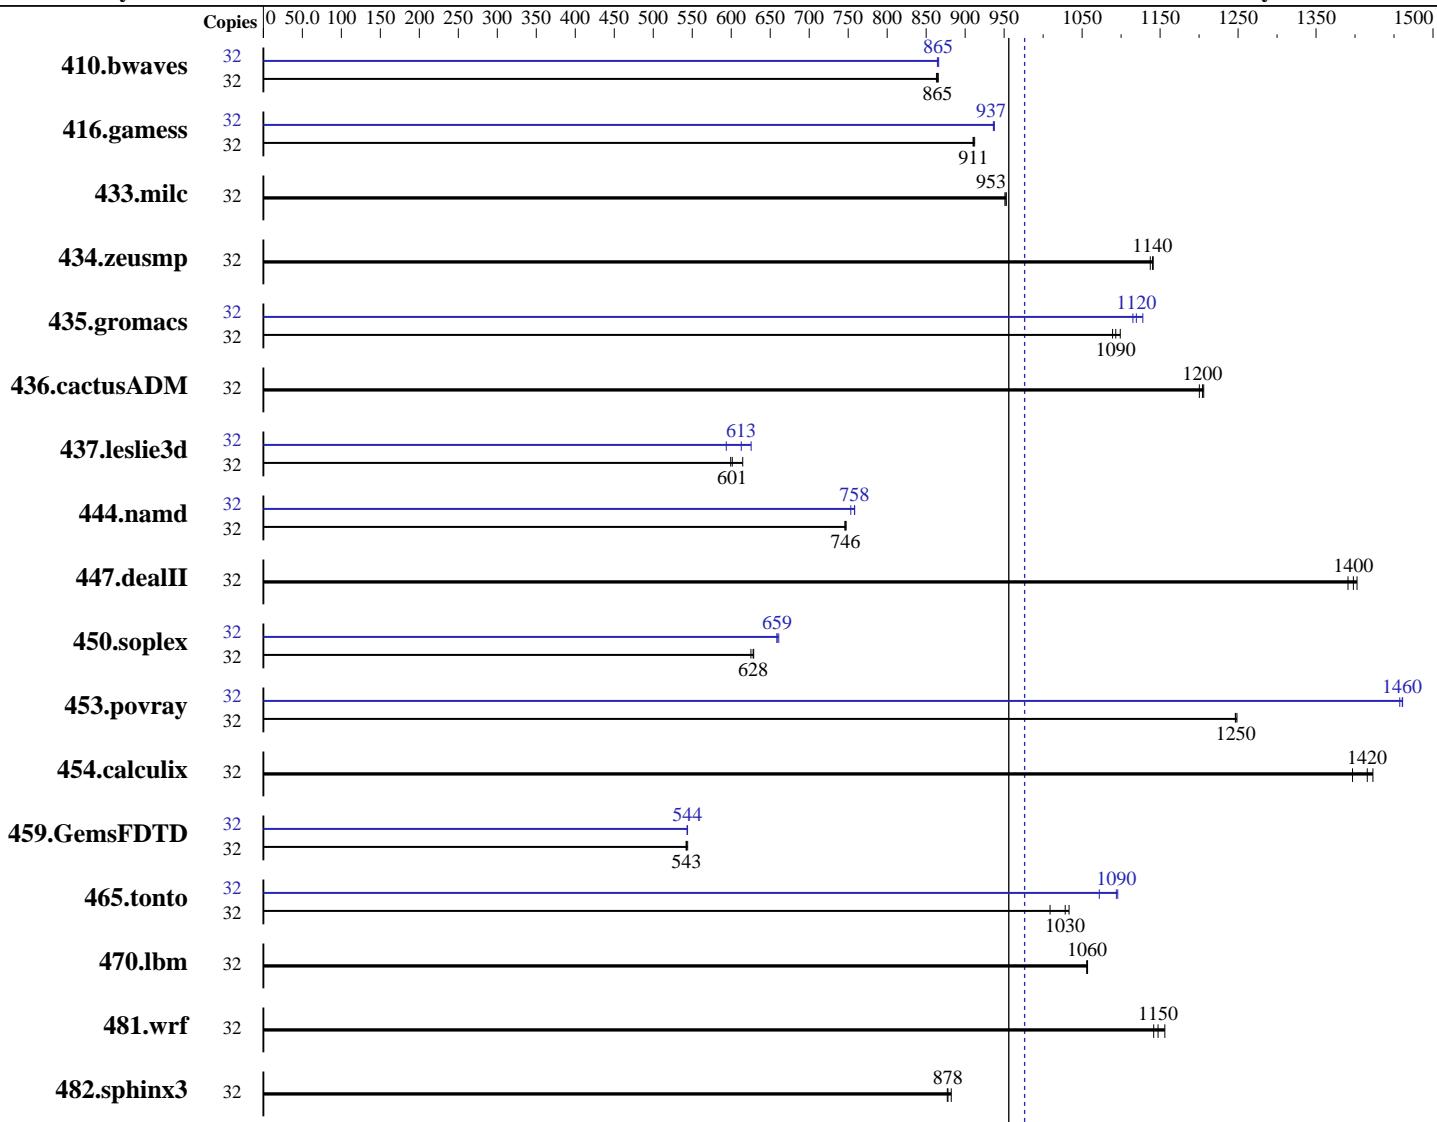

**SPECfp\_rate\_base2006 = 956**

**SPECfp\_rate2006 = 976**

## Hardware

CPU Name: Intel Xeon Gold 6144  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Compiler: 3.10.0-514.el7.x86\_64  
 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp\_rate2006 = 976**

**Huawei 2288H V5 (Intel Xeon Gold 6144)**

**SPECfp\_rate\_base2006 = 956**

**CPU2006 license:** 3175

**Test date:** Aug-2017

**Test sponsor:** Huawei

**Hardware Availability:** Sep-2017

**Tested by:** Huawei

**Software Availability:** Nov-2016

L3 Cache: 24.75 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 1200 GB SAS, 10000 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	502	865	<b>503</b>	<b>865</b>	504	863	32	502	866	<b>503</b>	<b>865</b>	503	864
416.gamess	32	687	912	688	910	<b>688</b>	<b>911</b>	32	<b>669</b>	<b>937</b>	669	936	668	937
433.milc	32	<b>308</b>	<b>953</b>	308	953	309	951	32	<b>308</b>	<b>953</b>	308	953	309	951
434.zeusmp	32	256	1140	<b>255</b>	<b>1140</b>	255	1140	32	256	1140	<b>255</b>	<b>1140</b>	255	1140
435.gromacs	32	210	1090	208	1100	<b>209</b>	<b>1090</b>	32	205	1120	<b>204</b>	<b>1120</b>	203	1130
436.cactusADM	32	<b>318</b>	<b>1200</b>	317	1210	319	1200	32	<b>318</b>	<b>1200</b>	317	1210	319	1200
437.leslie3d	32	489	615	502	599	<b>500</b>	<b>601</b>	32	<b>491</b>	<b>613</b>	507	594	481	626
444.namd	32	344	746	343	747	<b>344</b>	<b>746</b>	32	338	758	<b>339</b>	<b>758</b>	341	753
447.dealII	32	263	1390	<b>262</b>	<b>1400</b>	261	1400	32	263	1390	<b>262</b>	<b>1400</b>	261	1400
450.soplex	32	424	629	427	625	<b>425</b>	<b>628</b>	32	<b>405</b>	<b>659</b>	404	661	405	659
453.povray	32	137	1250	136	1250	<b>137</b>	<b>1250</b>	32	<b>117</b>	<b>1460</b>	117	1460	117	1460
454.calculix	32	186	1420	<b>186</b>	<b>1420</b>	189	1400	32	186	1420	<b>186</b>	<b>1420</b>	189	1400
459.GemsFDTD	32	<b>626</b>	<b>543</b>	626	542	624	544	32	625	543	624	544	<b>624</b>	<b>544</b>
465.tonto	32	<b>306</b>	<b>1030</b>	312	1010	305	1030	32	<b>288</b>	<b>1090</b>	294	1070	287	1100
470.lbm	32	416	1060	<b>416</b>	<b>1060</b>	416	1060	32	416	1060	<b>416</b>	<b>1060</b>	416	1060
481.wrf	32	313	1140	<b>312</b>	<b>1150</b>	309	1160	32	313	1140	<b>312</b>	<b>1150</b>	309	1160
482.sphinx3	32	711	877	707	882	<b>710</b>	<b>878</b>	32	711	877	707	882	<b>710</b>	<b>878</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Performance  
 Set SNC to Enable

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 976

Huawei 2288H V5 (Intel Xeon Gold 6144)

SPECfp\_rate\_base2006 = 956

CPU2006 license: 3175

Test date: Aug-2017

Test sponsor: Huawei

Hardware Availability: Sep-2017

Tested by: Huawei

Software Availability: Nov-2016

## Platform Notes (Continued)

```
Set IMC Interleaving to 1 way
Set Patrol Scrub to Disable
Sysinfo program /spec17/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Sat Dec 3 02:06:27 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6144 CPU @ 3.50GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings : 16
        physical 0: cores 0 4 5 6 16 19 20 22
        physical 1: cores 0 1 2 3 10 11 24 27
cache size : 25344 KB
```

```
From /proc/meminfo
MemTotal:      394144696 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.3 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.3"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 2 11:19
```

```
SPEC is set to: /spec17
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        xfs   859G  417G  443G  49% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 976**

Huawei 2288H V5 (Intel Xeon Gold 6144)

**SPECfp\_rate\_base2006 = 956**

CPU2006 license: 3175

Test date: Aug-2017

Test sponsor: Huawei

Hardware Availability: Sep-2017

Tested by: Huawei

Software Availability: Nov-2016

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.25 08/12/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 976**

Huawei 2288H V5 (Intel Xeon Gold 6144)

**SPECfp\_rate\_base2006 = 956**

CPU2006 license: 3175

Test date: Aug-2017

Test sponsor: Huawei

Hardware Availability: Sep-2017

Tested by: Huawei

Software Availability: Nov-2016

## Base Portability Flags (Continued)

```
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 976**

Huawei 2288H V5 (Intel Xeon Gold 6144)

**SPECfp\_rate\_base2006 = 956**

CPU2006 license: 3175

Test date: Aug-2017

Test sponsor: Huawei

Hardware Availability: Sep-2017

Tested by: Huawei

Software Availability: Nov-2016

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -fno-alias -auto-ilp32
    -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -qopt-malloc-options=3
    -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECfp\_rate2006 = 976**

Huawei 2288H V5 (Intel Xeon Gold 6144)

**SPECfp\_rate\_base2006 = 956**

CPU2006 license: 3175

Test date: Aug-2017

Test sponsor: Huawei

Hardware Availability: Sep-2017

Tested by: Huawei

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-SKL-V1.6.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:03:35 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 September 2017.