SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp®2006 = Not Run

SPECfp_base2006 = 143

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Sep-2017
Hardware Availability: Sep-2017
Software Availability: Apr-2017

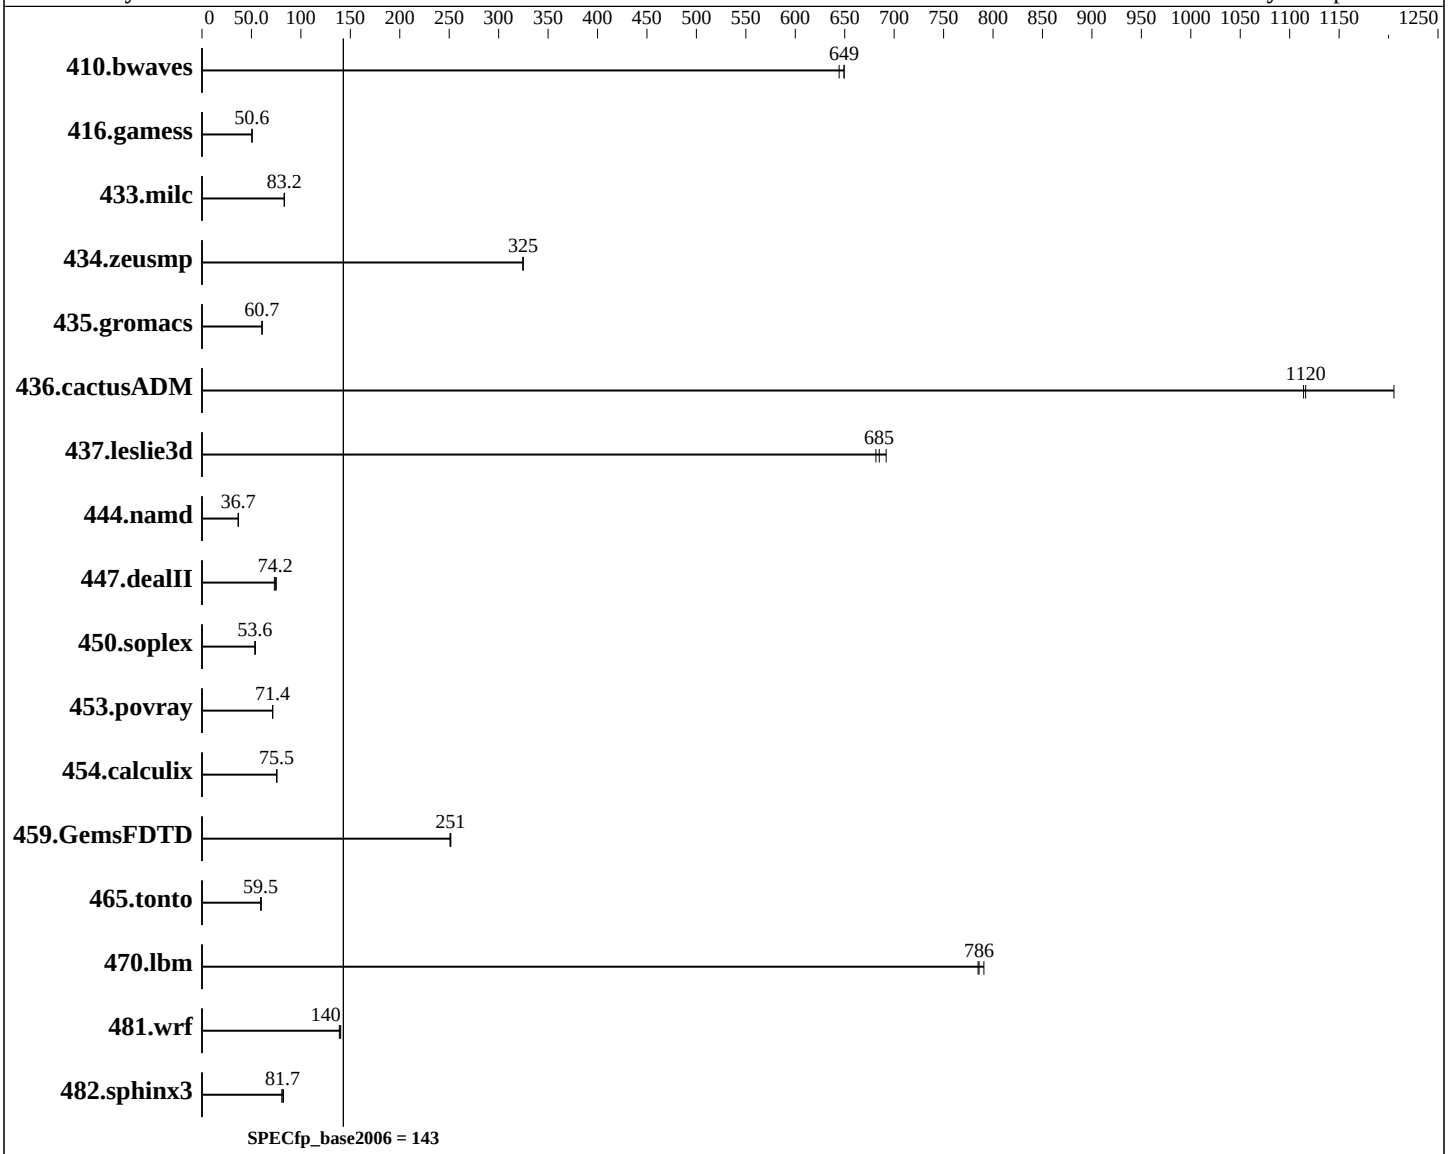

Hardware

CPU Name:	Intel Xeon Platinum 8180
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	112 cores, 4 chips, 28 cores/chip
CPU(s) orderable:	2,4 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo) Kernel 3.10.0-514.el7.x86_64
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen10
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp2006 = Not Run

SPECfp_base2006 = 143

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Sep-2017
Hardware Availability: Sep-2017
Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
Other Cache: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 800 GB SATA SSD, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	21.1	644	20.9	649	**20.9**	**649**						
416.gamess	387	50.6	387	50.6	**387**	**50.6**						
433.milc	110	83.3	**110**	**83.2**	110	83.2						
434.zeusmp	28.0	325	**28.0**	**325**	28.0	325						
435.gromacs	118	60.8	118	60.7	**118**	**60.7**						
436.cactusADM	10.7	1110	9.91	1210	**10.7**	**1120**						
437.leslie3d	13.8	682	13.6	692	**13.7**	**685**						
444.namd	218	36.7	**219**	**36.7**	219	36.7						
447.dealII	152	75.1	156	73.2	**154**	**74.2**						
450.soplex	154	54.1	**156**	**53.6**	156	53.5						
453.povray	74.3	71.6	**74.5**	**71.4**	74.6	71.3						
454.calculix	**109**	**75.5**	109	75.8	109	75.5						
459.GemsFDTD	42.3	251	42.2	252	**42.2**	**251**						
465.tonto	166	59.4	**166**	**59.5**	164	59.9						
470.lbm	17.5	785	**17.5**	**786**	17.4	791						
481.wrf	**80.0**	**140**	79.6	140	80.4	139						
482.sphinx3	236	82.4	**239**	**81.7**	242	80.7						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default.
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

Platform Notes

```
BIOS Configuration:
Hyper-Threading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Enabled
Memory patrol scrubbing set to disabled
```

Continued on next page

Platform Notes (Continued)

```
AHS PCI logging level set to Minimal logging
Workload Profile set to General Peak Frequency Compute
 Energy/Performance Bias set to Maximum Performance
 Minimum Processor Idle Power Core C-state set to C1E
Workload Profile set to Custom
 Uncore Frequency Scaling set to Auto
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on DL580G10 Sat Sep 16 00:55:23 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
      4 "physical id"s (chips)
      112 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 28
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
      physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
      25 26 27 28 29 30
   cache size : 39424 KB

From /proc/meminfo
   MemTotal:       792278088 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.3 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.3"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux DL580G10 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 15 22:46

SPEC is set to: /home/cpu2006
   Filesystem                     Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel_dl580g10-home xfs   690G   13G  677G   2% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HPE U34 08/18/2017
  Memory:
   48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=core,compact"
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"
OMP_NUM_THREADS = "19"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 4 12:39:12 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2017.