



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Silver 4116)

**SPECint®2006 = Not Run**

**SPECint\_base2006 = 60.9**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

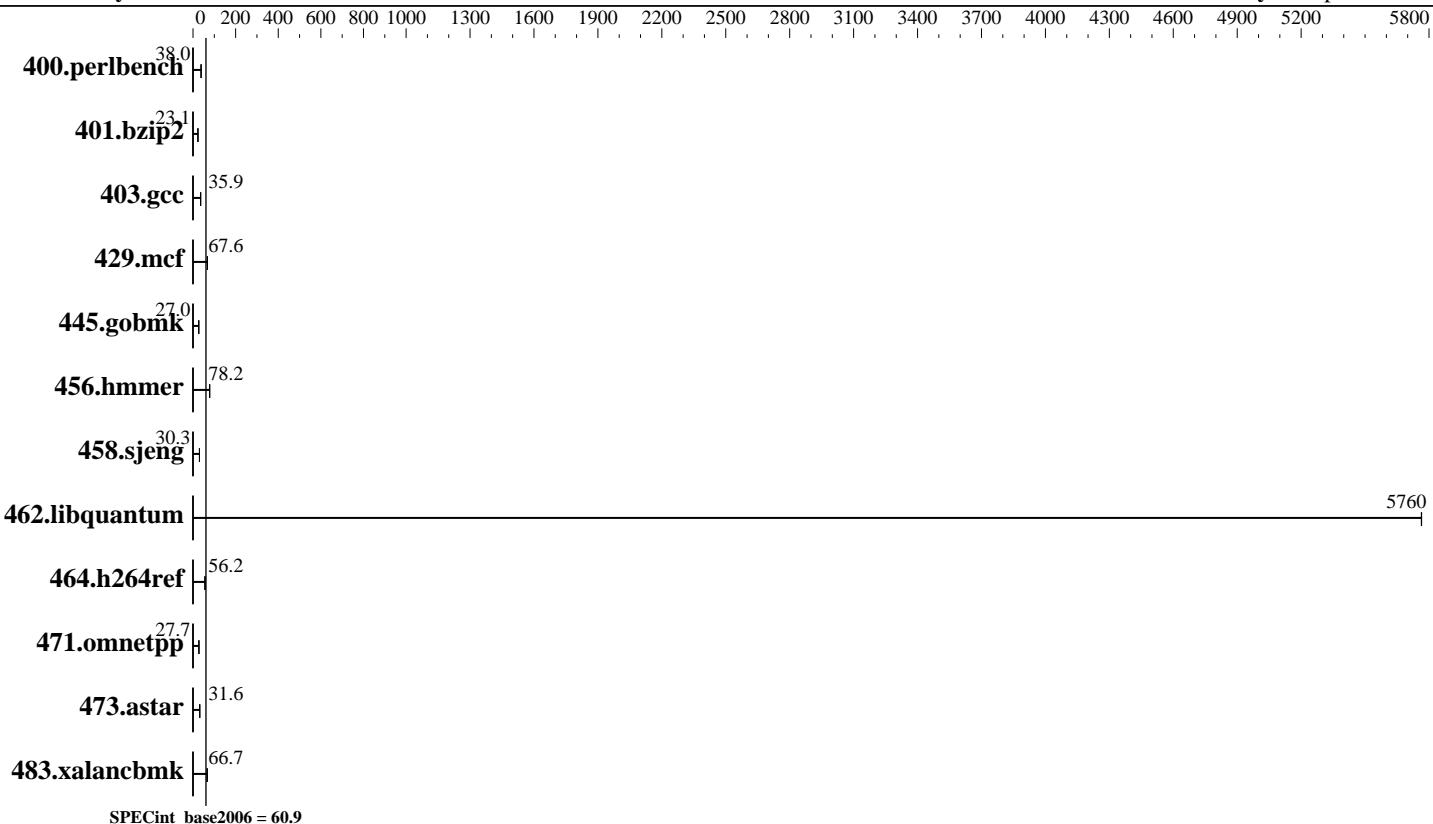

## Hardware

CPU Name:	Intel Xeon Silver 4116
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	16.5 MB I+D on chip per chip
Other Cache:	None
Memory:	192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)
Disk Subsystem:	1 x 960 GB SATA SSD, RAID 0
Other Hardware:	None

## Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo), Kernel 3.10.0-514.6.1.el7.x86_64
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL380 Gen10  
(2.10 GHz, Intel Xeon Silver 4116)

**SPECint2006 = Not Run**

**SPECint\_base2006 = 60.9**

CPU2006 license: 3

Test date: Oct-2017

Test sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Apr-2017

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>257</b>	<b>38.0</b>	257	38.0	258	37.9						
401.bzip2	<b>417</b>	<b>23.1</b>	417	23.1	417	23.1						
403.gcc	224	36.0	<b>224</b>	<b>35.9</b>	225	35.7						
429.mcf	136	67.1	134	67.9	<b>135</b>	<b>67.6</b>						
445.gobmk	388	27.0	388	27.0	<b>388</b>	<b>27.0</b>						
456.hmmer	119	78.2	<b>119</b>	<b>78.2</b>	119	78.2						
458.sjeng	<b>400</b>	<b>30.3</b>	400	30.3	400	30.3						
462.libquantum	3.59	5770	3.59	5760	<b>3.59</b>	<b>5760</b>						
464.h264ref	394	56.2	<b>394</b>	<b>56.2</b>	394	56.2						
471.omnetpp	<b>225</b>	<b>27.7</b>	227	27.6	225	27.8						
473.astar	<b>222</b>	<b>31.6</b>	222	31.6	221	31.7						
483.xalancbmk	103	66.8	104	66.2	<b>103</b>	<b>66.7</b>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

irqbalance disabled with "systemctl stop irqbalance"

tuned profile set with "tuned-adm profile throughput-performance"

## Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetcher set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Pofile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Uncore Frequency Scaling set to Auto

Workload Pofile set to Custom

NUMA Group Size Optimization set to Flat

Sysinfo program /cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on DL380-sys2-RHEL73 Sun Oct 15 21:34:41 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Silver 4116)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**60.9**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
  2 "physical id"s (chips)
  24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings : 12
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 16896 KB
```

```
From /proc/meminfo
MemTotal:      197573772 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.3 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.3"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux DL380-sys2-RHEL73 3.10.0-514.6.1.el7.x86_64 #1 SMP Sat Dec 10 11:15:38
EST 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 15 15:26

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   889G   51G  839G   6% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017

Memory:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Silver 4116)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**60.9**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Silver 4116)

**SPECint2006 =**

**Not Run**

**SPECint\_base2006 =**

**60.9**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 1 00:54:36 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 October 2017.