



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Sugon

### SPECfp<sup>®</sup>\_rate2006 = 984

### Sugon A320-G30 (AMD EPYC 7601)

### SPECfp\_rate\_base2006 = 856

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

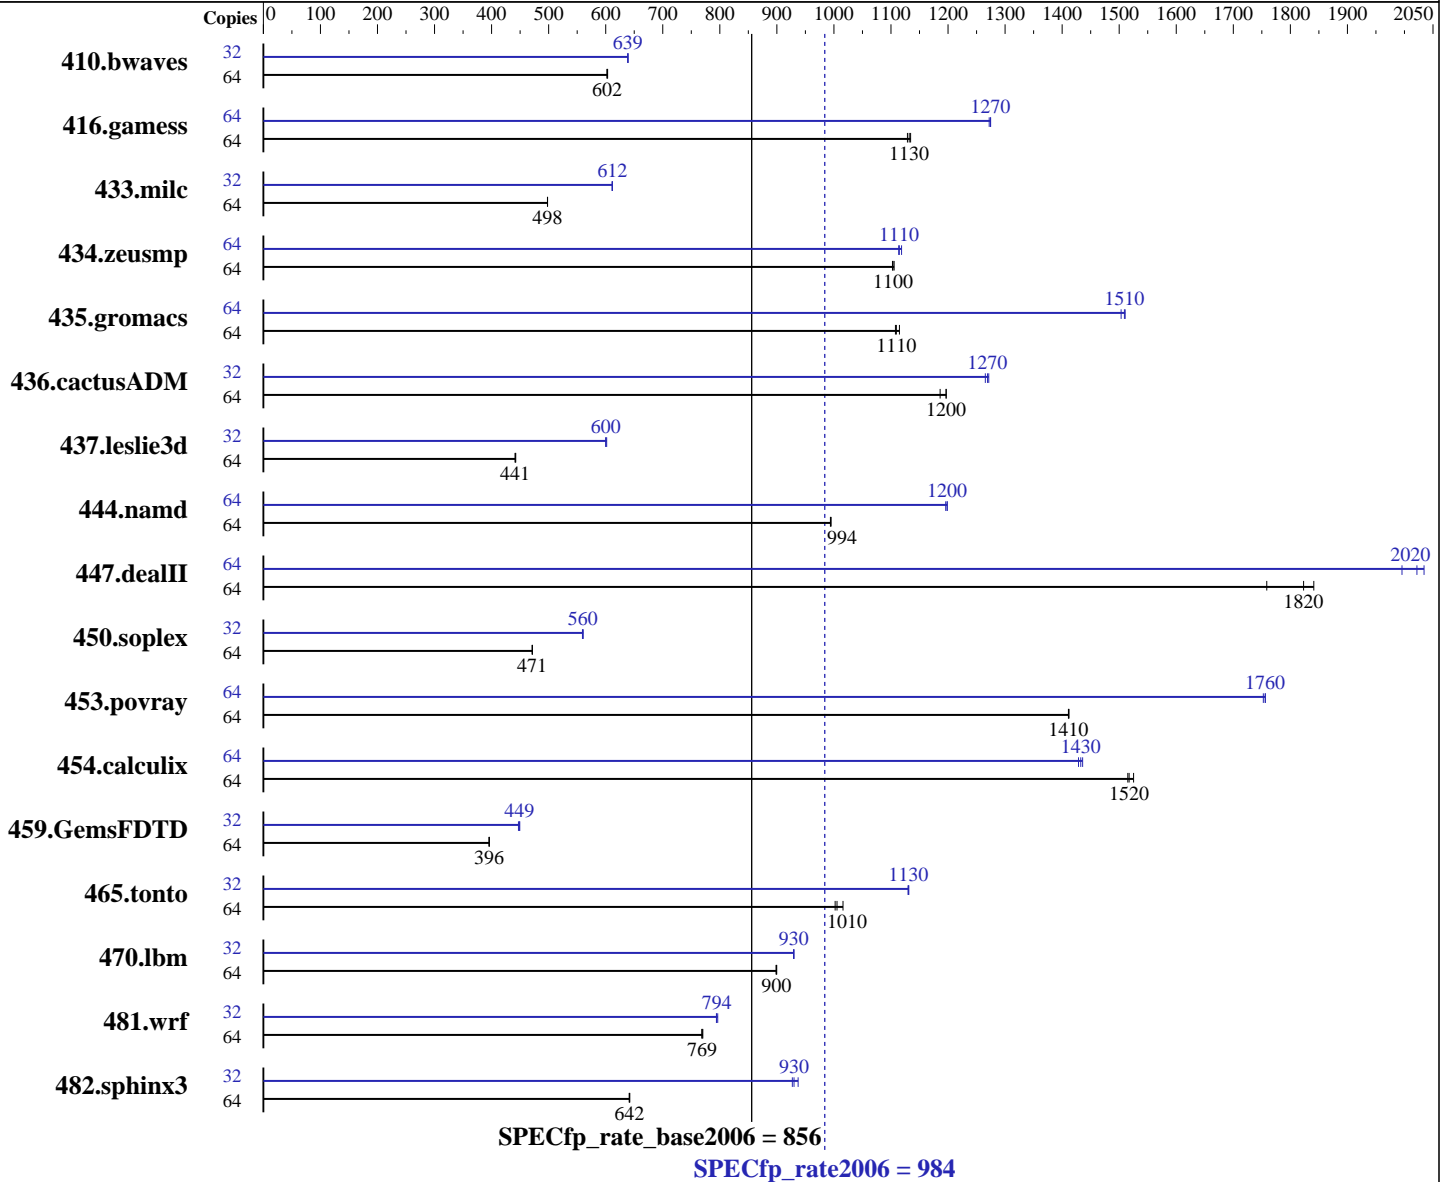

#### Hardware

CPU Name: AMD EPYC 7601  
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 1 chip, 32 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 64 KB I + 32 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server 7.4  
 Kernel 3.10.0-693.2.2  
 Compiler: C/C++/Fortran: Version 4.5.2.1 of x86 Open64  
 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (Multi User)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = **984**

### Sugon A320-G30 (AMD EPYC 7601)

SPECfp\_rate\_base2006 = **856**

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 4 cores  
Other Cache: None  
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2667V-R, running at 2400)  
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1442	603	<b>1444</b>	<b>602</b>	1444	602	32	<b>681</b>	<b>639</b>	681	639	680	639
416.gamess	64	1105	1130	<b>1107</b>	<b>1130</b>	1110	1130	64	<b>983</b>	<b>1270</b>	985	1270	983	1270
433.milc	64	<b>1180</b>	<b>498</b>	1180	498	1180	498	32	480	612	481	611	<b>480</b>	<b>612</b>
434.zeusmp	64	527	1110	528	1100	<b>528</b>	<b>1100</b>	64	<b>523</b>	<b>1110</b>	523	1110	521	1120
435.gromacs	64	<b>412</b>	<b>1110</b>	410	1110	412	1110	64	<b>303</b>	<b>1510</b>	303	1510	304	1500
436.cactusADM	64	645	1190	639	1200	<b>639</b>	<b>1200</b>	32	302	1270	<b>301</b>	<b>1270</b>	301	1270
437.leslie3d	64	1360	442	1363	441	<b>1363</b>	<b>441</b>	32	500	602	501	600	<b>501</b>	<b>600</b>
444.namd	64	516	995	<b>516</b>	<b>994</b>	516	994	64	<b>428</b>	<b>1200</b>	429	1200	428	1200
447.dealII	64	398	1840	<b>402</b>	<b>1820</b>	416	1760	64	367	2000	<b>362</b>	<b>2020</b>	360	2030
450.soplex	64	<b>1132</b>	<b>471</b>	1133	471	1132	472	32	477	559	476	561	<b>477</b>	<b>560</b>
453.povray	64	241	1410	<b>241</b>	<b>1410</b>	241	1410	64	194	1750	194	1760	<b>194</b>	<b>1760</b>
454.calculix	64	348	1520	346	1530	<b>348</b>	<b>1520</b>	64	<b>369</b>	<b>1430</b>	370	1430	368	1440
459.GemsFDTD	64	<b>1716</b>	<b>396</b>	1715	396	1716	396	32	759	447	756	449	<b>757</b>	<b>449</b>
465.tonto	64	<b>626</b>	<b>1010</b>	620	1020	628	1000	32	279	1130	<b>278</b>	<b>1130</b>	278	1130
470.lbm	64	<b>978</b>	<b>900</b>	978	900	979	899	32	473	929	473	930	<b>473</b>	<b>930</b>
481.wrf	64	928	770	930	768	<b>929</b>	<b>769</b>	32	450	794	<b>450</b>	<b>794</b>	449	796
482.sphinx3	64	1945	641	1942	642	<b>1944</b>	<b>642</b>	32	<b>671</b>	<b>930</b>	673	927	665	937

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 984

Sugon A320-G30 (AMD EPYC 7601)

SPECfp\_rate\_base2006 = 856

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

## Operating System Notes (Continued)

Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

Transparent huge pages were enabled for this run (OS default)

Set vm/nr\_hugepages=57344 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

BIOS settings:  
Determinism Slider = Power  
cTDP Control = Manual  
cTDP = 200

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"

The binaries were built with the AMD supported x86 Open64 Compiler Suite, which is only available from AMD at <http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/>  
Binaries were compiled on a system with 2 x AMD Opteron 6378 chips + 128 GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 984

Sugon A320-G30 (AMD EPYC 7601)

SPECfp\_rate\_base2006 = 856

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
      -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs

```

### C++ benchmarks:

```

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

### Fortran benchmarks:

```

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

### Benchmarks using both Fortran and C:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs -LNO:blocking=off -LNO:simd_peel_align=on
-OPT:rsqrt=2 -OPT:unroll_size=256

```

## Peak Compiler Invocation

### C benchmarks:

openc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 984

Sugon A320-G30 (AMD EPYC 7601)

SPECfp\_rate\_base2006 = 856

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
opencc openf95

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1 -mno-fma4

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mno-fma4
-mso

482.sphinx3: -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 984

Sugon A320-G30 (AMD EPYC 7601)

SPECfp\_rate\_base2006 = 856

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=0 -CG:load\_exe=0 -OPT:unroll\_size=256  
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if\_select\_conv=1  
-OPT:alias=disjoint -LNO:psimd\_iso\_unroll=ON -march=bdver2  
-mno-fma4 -WB, -mno-xop -mno-tbm

447.deallI: -Ofast -D\_OPEN64\_FAST\_SET -static -INLINE:aggressive=on  
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -CG:movext\_icmp=off -TENV:frame\_pointer=off  
-march=bdver1 -mno-fma4

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:ignore\_feedback=off -INLINE:aggressive=on -OPT:RO=1  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -fno-exceptions -CG:p2align=0  
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on  
-march=bdver1

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on  
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m  
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0  
-march=bdver2 -mno-fma4 -WB, -mno-xop -mno-tbm -Wl,  
-z,muldefs

Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off  
-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on  
-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -CG:cmp\_peep=on -march=bdver2 -mno-fma4

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3  
-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m  
-WOPT:sib=on -march=bdver1 -mno-fma4

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500  
-HP:bdt=2m:heap=2m -march=bdver2 -mno-fma4

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2  
-HP:bdt=2m:heap=2m -mso -march=bdver1 -mno-fma4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 984

Sugon A320-G30 (AMD EPYC 7601)

SPECfp\_rate\_base2006 = 856

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

## Peak Optimization Flags (Continued)

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024  
-OPT:unroll\_times\_max=16 -LNO:fission=2  
-CG:local\_sched\_alg=2 -HP -march=bdver1 -mno-fma4

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525  
-HP:bdt=2m:heap=2m -march=bdver2 -WB, -mno-fma4 -mno-tbm  
-mno-xop

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m  
-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on  
-march=bdver2 -mno-fma4 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0  
-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1  
-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver2  
-mno-fma4

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m  
-march=bdver1 -mno-fma4

481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -HP  
-WOPT:sib=on -march=bdver1 -mno-fma4

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 27 12:04:49 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.