



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp®_rate2006 = 2170

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017


Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

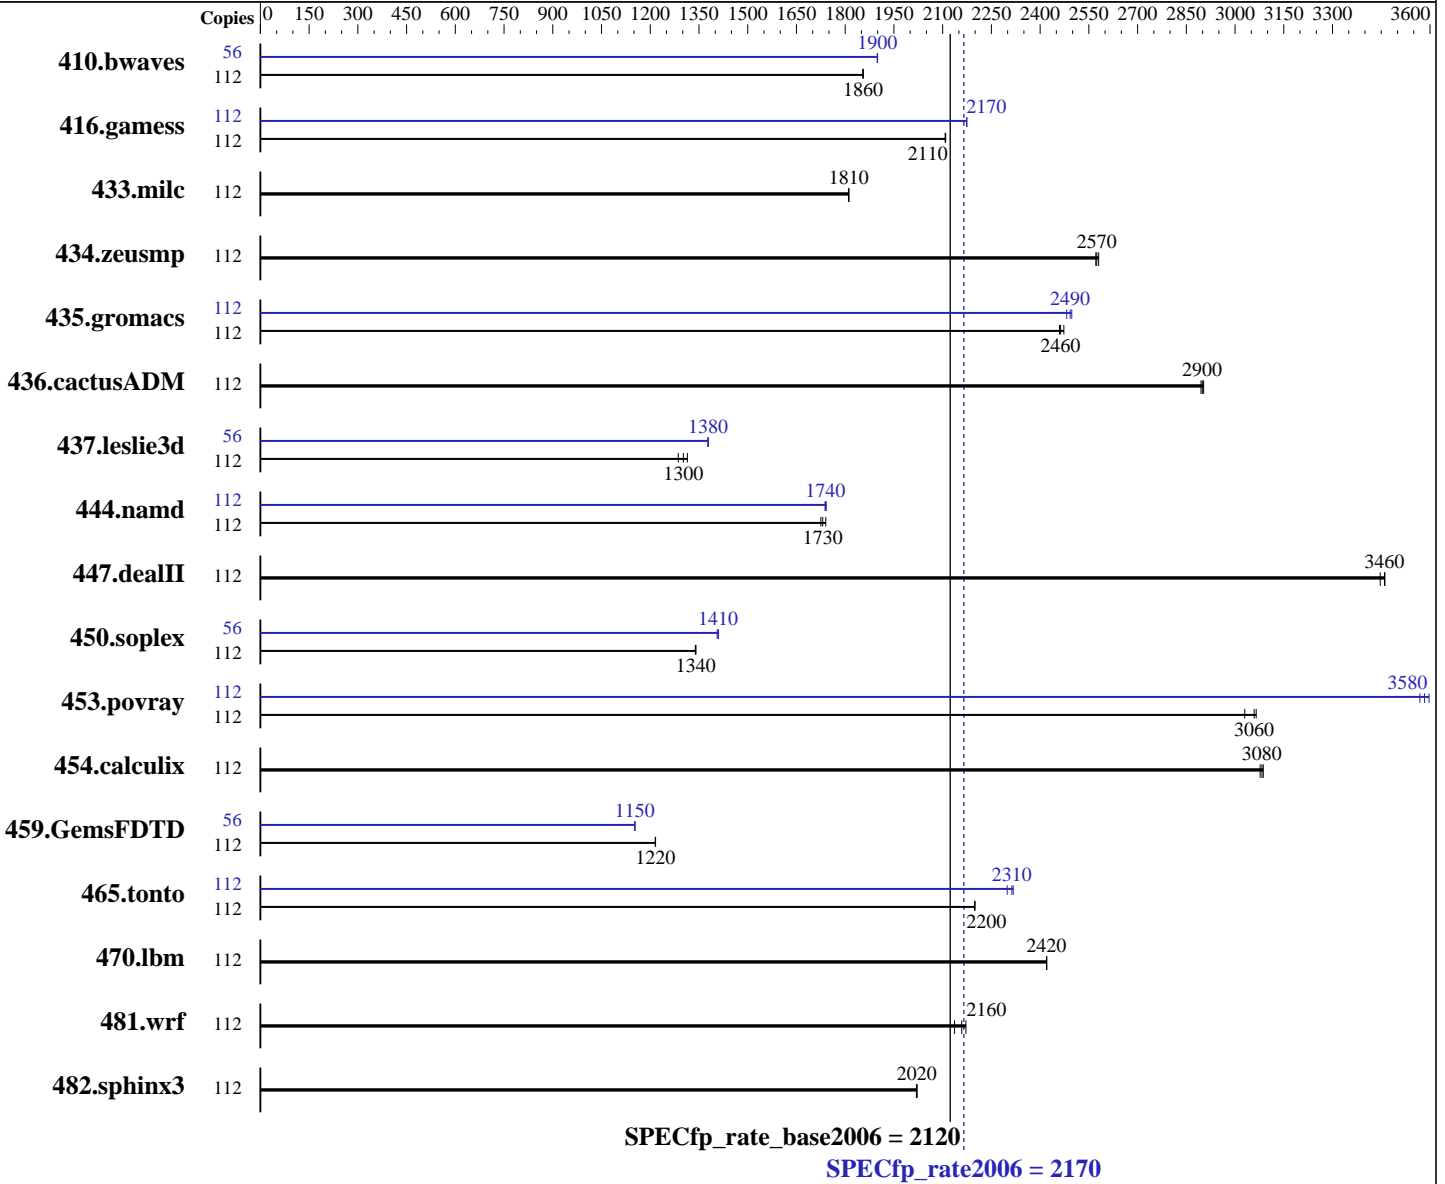

Hardware

CPU Name: Intel Xeon Gold 5120
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 2170

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

L3 Cache: 19.25 MB I+D on chip per chip
Other Cache: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)
Disk Subsystem: 1 x 800 GB SAS SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|---------------|--------|-------------|-------------|------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|------------|-------------|--|--|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | | |
| 410.bwaves | 112 | 821 | 1850 | 820 | 1860 | 820 | 1860 | 56 | 401 | 1900 | 401 | 1900 | 401 | 1900 | | |
| 416.gamess | 112 | 1041 | 2110 | 1040 | 2110 | 1040 | 2110 | 112 | 1008 | 2170 | 1009 | 2170 | 1009 | 2170 | | |
| 433.milc | 112 | 568 | 1810 | 568 | 1810 | 568 | 1810 | 112 | 568 | 1810 | 568 | 1810 | 568 | 1810 | | |
| 434.zeusmp | 112 | 396 | 2570 | 396 | 2570 | 395 | 2580 | 112 | 396 | 2570 | 396 | 2570 | 395 | 2580 | | |
| 435.gromacs | 112 | 325 | 2460 | 323 | 2470 | 325 | 2460 | 112 | 322 | 2480 | 320 | 2500 | 321 | 2490 | | |
| 436.cactusADM | 112 | 462 | 2900 | 462 | 2900 | 461 | 2900 | 112 | 462 | 2900 | 462 | 2900 | 461 | 2900 | | |
| 437.leslie3d | 112 | 809 | 1300 | 819 | 1290 | 801 | 1310 | 56 | 382 | 1380 | 382 | 1380 | 382 | 1380 | | |
| 444.namd | 112 | 516 | 1740 | 521 | 1730 | 519 | 1730 | 112 | 517 | 1740 | 516 | 1740 | 516 | 1740 | | |
| 447.dealII | 112 | 372 | 3450 | 370 | 3460 | 370 | 3460 | 112 | 372 | 3450 | 370 | 3460 | 370 | 3460 | | |
| 450.soplex | 112 | 698 | 1340 | 697 | 1340 | 697 | 1340 | 56 | 331 | 1410 | 332 | 1410 | 331 | 1410 | | |
| 453.povray | 112 | 194 | 3070 | 197 | 3030 | 195 | 3060 | 112 | 166 | 3580 | 167 | 3570 | 166 | 3600 | | |
| 454.calculix | 112 | 299 | 3090 | 300 | 3080 | 300 | 3080 | 112 | 299 | 3090 | 300 | 3080 | 300 | 3080 | | |
| 459.GemsFDTD | 112 | 977 | 1220 | 978 | 1220 | 977 | 1220 | 56 | 515 | 1150 | 515 | 1150 | 516 | 1150 | | |
| 465.tonto | 112 | 501 | 2200 | 501 | 2200 | 501 | 2200 | 112 | 479 | 2300 | 476 | 2320 | 476 | 2310 | | |
| 470.lbm | 112 | 636 | 2420 | 636 | 2420 | 636 | 2420 | 112 | 636 | 2420 | 636 | 2420 | 636 | 2420 | | |
| 481.wrf | 112 | 580 | 2160 | 576 | 2170 | 586 | 2140 | 112 | 580 | 2160 | 576 | 2170 | 586 | 2140 | | |
| 482.sphinx3 | 112 | 1080 | 2020 | 1080 | 2020 | 1081 | 2020 | 112 | 1080 | 2020 | 1080 | 2020 | 1081 | 2020 | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
Choose Operating Mode set to Maximum Performance
Execute Disable Bit set to Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 2170

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

DCU Streamer Prefetcher set to Disable
 Intel Virtualization Technology set to Disable
 Stale AtoS set to Enable
 LLC dead line alloc set to Disable
 SNC set to Enable
 Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on Electron-node-02 Thu Sep 21 04:49:37 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5120 CPU @ 2.20GHz
 4 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings  : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 19712 KB
```

```
From /proc/meminfo
MemTotal:      1584975092 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:12:sp2"
```

```
uname -a:
Linux Electron-node-02 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 2170

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 20 18:09

SPEC is set to: /home/cpu2006-1.2-ic17.0u3

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda4 | xfs | 688G | 116G | 573G | 17% | /home |

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE113J-1.00]- 06/03/2017

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 2170

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 2170

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -fno-alias -auto-ilp32
 -qopt-mem-layout-trans=3

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 2170

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017

Test date: Sep-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.20171004.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850
(2.20 GHz, Intel Xeon Gold 5120)

SPECfp_rate2006 = 2170

SPECfp_rate_base2006 = 2120

CPU2006 license: 9017

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Sep-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 27 12:05:56 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2017.