



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro


SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Aug-2017  
Hardware Availability: Oct-2016  
Software Availability: May-2017

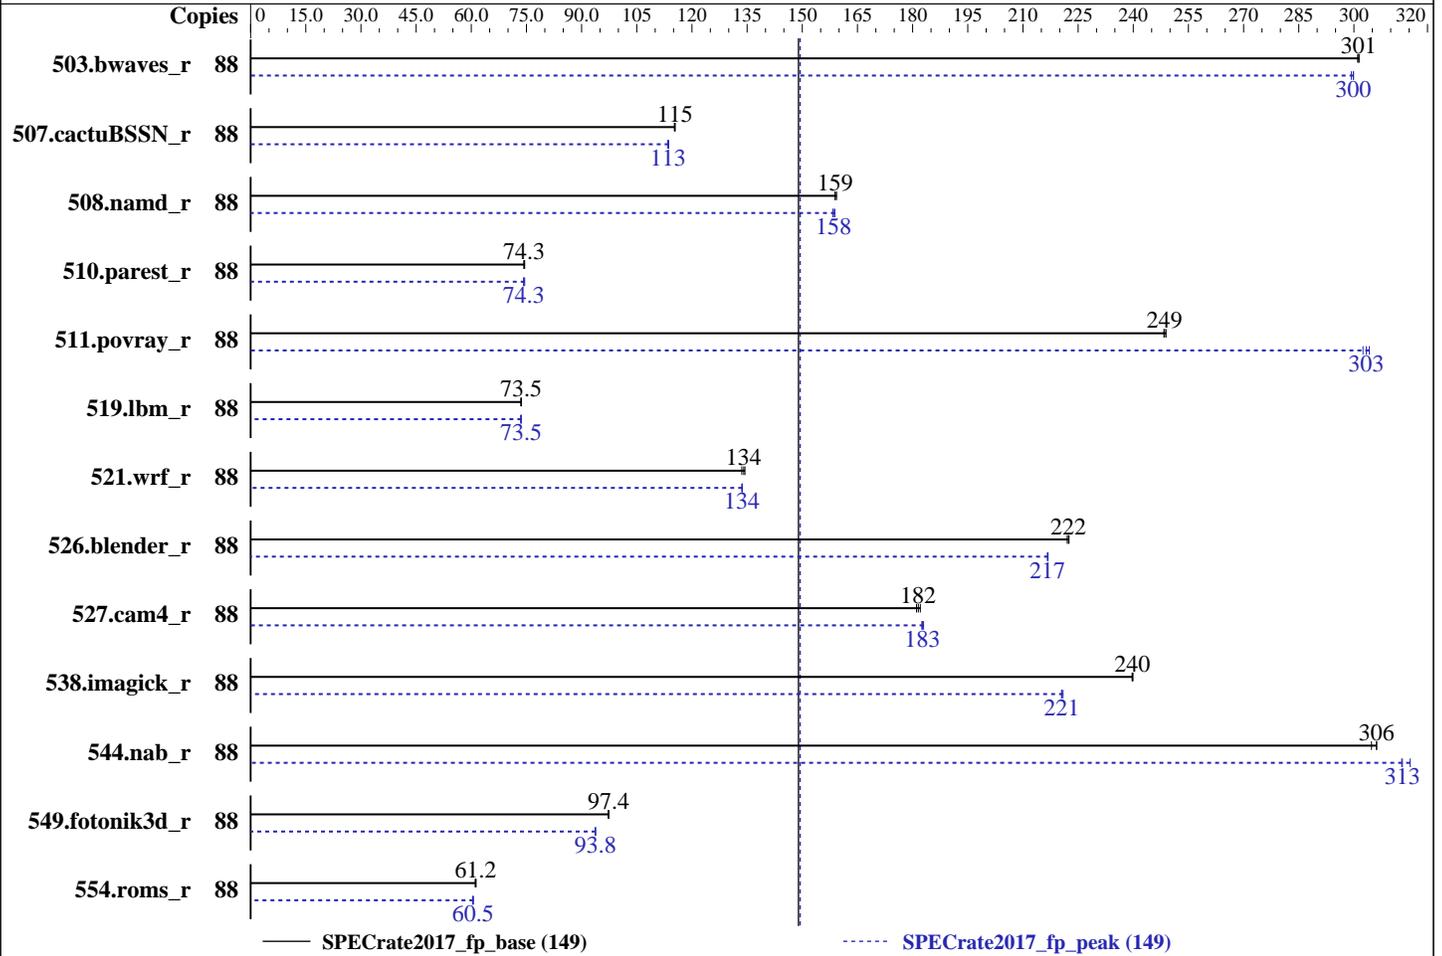

### Hardware

CPU Name: Intel Xeon E5-2699A v4  
Max MHz.: 3600  
Nominal: 2400  
Enabled: 44 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 55 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)  
Storage: 600 GB, SATA2, SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
Compiler: C/C++: Version 17.0.4.196 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.4.196 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: BIOS American Megatrends Inc. Version 2.0c released Apr-2017  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other: Microquill SmartHeap V10.2



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Aug-2017  
Hardware Availability: Oct-2016  
Software Availability: May-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	88	2932	301	<b><u>2929</u></b>	<b><u>301</u></b>	2928	301	88	2949	299	2942	300	<b><u>2943</u></b>	<b><u>300</u></b>
507.cactuBSSN_r	88	967	115	965	115	<b><u>965</u></b>	<b><u>115</u></b>	88	980	114	<b><u>982</u></b>	<b><u>113</u></b>	982	113
508.namd_r	88	525	159	526	159	<b><u>526</u></b>	<b><u>159</u></b>	88	528	158	<b><u>527</u></b>	<b><u>158</u></b>	526	159
510.parest_r	88	3097	74.3	3089	74.5	<b><u>3096</u></b>	<b><u>74.3</u></b>	88	3102	74.2	<b><u>3099</u></b>	<b><u>74.3</u></b>	3089	74.5
511.povray_r	88	<b><u>827</u></b>	<b><u>249</u></b>	827	248	826	249	88	679	302	675	304	<b><u>677</u></b>	<b><u>303</u></b>
519.lbm_r	88	1260	73.6	<b><u>1261</u></b>	<b><u>73.5</u></b>	1262	73.5	88	<b><u>1261</u></b>	<b><u>73.5</u></b>	1260	73.6	1263	73.4
521.wrf_r	88	1476	134	1467	134	<b><u>1470</u></b>	<b><u>134</u></b>	88	1475	134	<b><u>1475</u></b>	<b><u>134</u></b>	1475	134
526.blender_r	88	<b><u>603</u></b>	<b><u>222</u></b>	602	223	604	222	88	619	217	<b><u>618</u></b>	<b><u>217</u></b>	618	217
527.cam4_r	88	850	181	845	182	<b><u>848</u></b>	<b><u>182</u></b>	88	<b><u>843</u></b>	<b><u>183</u></b>	841	183	843	183
538.imagick_r	88	912	240	<b><u>913</u></b>	<b><u>240</u></b>	913	240	88	991	221	<b><u>992</u></b>	<b><u>221</u></b>	992	221
544.nab_r	88	<b><u>484</u></b>	<b><u>306</u></b>	486	305	484	306	88	473	313	<b><u>473</u></b>	<b><u>313</u></b>	470	315
549.fotonik3d_r	88	3526	97.2	<b><u>3523</u></b>	<b><u>97.4</u></b>	3522	97.4	88	<b><u>3658</u></b>	<b><u>93.8</u></b>	3661	93.7	3656	93.8
554.roms_r	88	<b><u>2284</u></b>	<b><u>61.2</u></b>	2282	61.3	2290	61.1	88	2308	60.6	<b><u>2313</u></b>	<b><u>60.5</u></b>	2315	60.4

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

### Platform Notes

BIOS Settings:  
QPI Configuration:  
  COD Enable: enabled  
  Early Snoop: disabled  
Memory Configuration:  
  Patrol Scrub: disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on 196-204 Tue Aug 22 17:56:46 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
  model name : Intel(R) Xeon(R) CPU E5-2699A v4 @ 2.40GHz  
  2 "physical id"s (chips)  
  88 "processors"  
  cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
  cpu cores : 22  
  siblings : 44  
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

From lscpu:  
  Architecture: x86\_64  
  CPU op-mode(s): 32-bit, 64-bit  
  Byte Order: Little Endian  
  CPU(s): 88  
  On-line CPU(s) list: 0-87  
  Thread(s) per core: 2  
  Core(s) per socket: 22  
  Socket(s): 2  
  NUMA node(s): 4  
  Vendor ID: GenuineIntel  
  CPU family: 6  
  Model: 79  
  Model name: Intel(R) Xeon(R) CPU E5-2699A v4 @ 2.40GHz  
  Stepping: 1  
  CPU MHz: 2568.386  
  CPU max MHz: 3600.0000  
  CPU min MHz: 1200.0000  
  BogoMIPS: 4799.98  
  Virtualization: VT-x  
  L1d cache: 32K

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

### Platform Notes (Continued)

```

L1i cache:          32K
L2 cache:           256K
L3 cache:           28160K
NUMA node0 CPU(s): 0-10,44-54
NUMA node1 CPU(s): 11-21,55-65
NUMA node2 CPU(s): 22-32,66-76
NUMA node3 CPU(s): 33-43,77-87
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf
eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm rdseed adx smap xsaveopt cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 44 45 46 47 48 49 50 51 52 53 54
node 0 size: 128828 MB
node 0 free: 117438 MB
node 1 cpus: 11 12 13 14 15 16 17 18 19 20 21 55 56 57 58 59 60 61 62 63 64 65
node 1 size: 129020 MB
node 1 free: 119097 MB
node 2 cpus: 22 23 24 25 26 27 28 29 30 31 32 66 67 68 69 70 71 72 73 74 75 76
node 2 size: 129020 MB
node 2 free: 119395 MB
node 3 cpus: 33 34 35 36 37 38 39 40 41 42 43 77 78 79 80 81 82 83 84 85 86 87
node 3 size: 129019 MB
node 3 free: 119409 MB
node distances:
node  0  1  2  3
 0:  10  11  21  21
 1:  11  10  21  21
 2:  21  21  10  11
 3:  21  21  11  10

```

```

From /proc/meminfo
MemTotal:          528270604 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

```

```
/usr/bin/lsb_release -d
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

### Platform Notes (Continued)

SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 2

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION\_ID="12.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux 196-204 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86\_64  
x86\_64 x86\_64 GNU/Linux

run-level 3 Aug 22 04:20

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/isw_cefabaa_OS_Disk-part8	xfs	489G	91G	398G	19%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0c 04/21/2017

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A4K40BB1-CRC 32 GB 2 rank 2400

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

icc (ICC) 17.0.4 20170411

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

### Compiler Version Notes (Continued)

=====  
CC 519.lbm\_r(peak) 538.imagick\_r(peak) 544.nab\_r(peak)  
=====

icc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
=====

icpc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
=====

icpc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
=====

icpc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)  
=====

icpc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
FC 507.cactuBSSN\_r(base)  
=====

icpc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 17.0.4 20170411  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

### Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(peak)  
-----

icpc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----

ifort (IFORT) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(peak) 549.fotonik3d\_r(peak) 554.roms\_r(peak)  
-----

ifort (IFORT) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
-----

ifort (IFORT) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
-----

ifort (IFORT) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 17.0.4 20170411  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64  
507.cactuBSSN_r: -DSPEC_LP64  
508.namd_r: -DSPEC_LP64  
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-qopt-mem-layout-trans=3 -L/sh10.2 -lsmartheap64`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs`

Benchmarks using both C and C++:

`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/sh10.2 -lsmartheap64`

Benchmarks using Fortran, C, and C++:

`-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-L/sh10.2 -lsmartheap64`

## Peak Compiler Invocation

C benchmarks:

`icc -m64 -std=c11`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`ifort -m64 icc -m64 -std=c11`

Benchmarks using both C and C++:

`icpc -m64 icc -m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`icpc -m64 icc -m64 -std=c11 ifort -m64`



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

### C benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3

### C++ benchmarks:

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2  
-O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-L/sh10.2 -lsmartheap64

### Fortran benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs

### Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs

### Benchmarks using both C and C++:

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2  
-O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-L/sh10.2 -lsmartheap64

### Benchmarks using Fortran, C, and C++:

-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2  
-O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -L/sh10.2 -lsmartheap64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-revI.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-revI.xml>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2028U-TR4T+ (X10DRU-i+, Intel Xeon E5-2699A v4)

SPECrate2017\_fp\_base = 149

SPECrate2017\_fp\_peak = 149

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Aug-2017  
**Hardware Availability:** Oct-2016  
**Software Availability:** May-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.1 on 2017-08-22 20:56:45-0400.  
Report generated on 2018-10-31 12:45:24 by CPU2017 PDF formatter v6067.  
Originally published on 2017-09-26.