



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

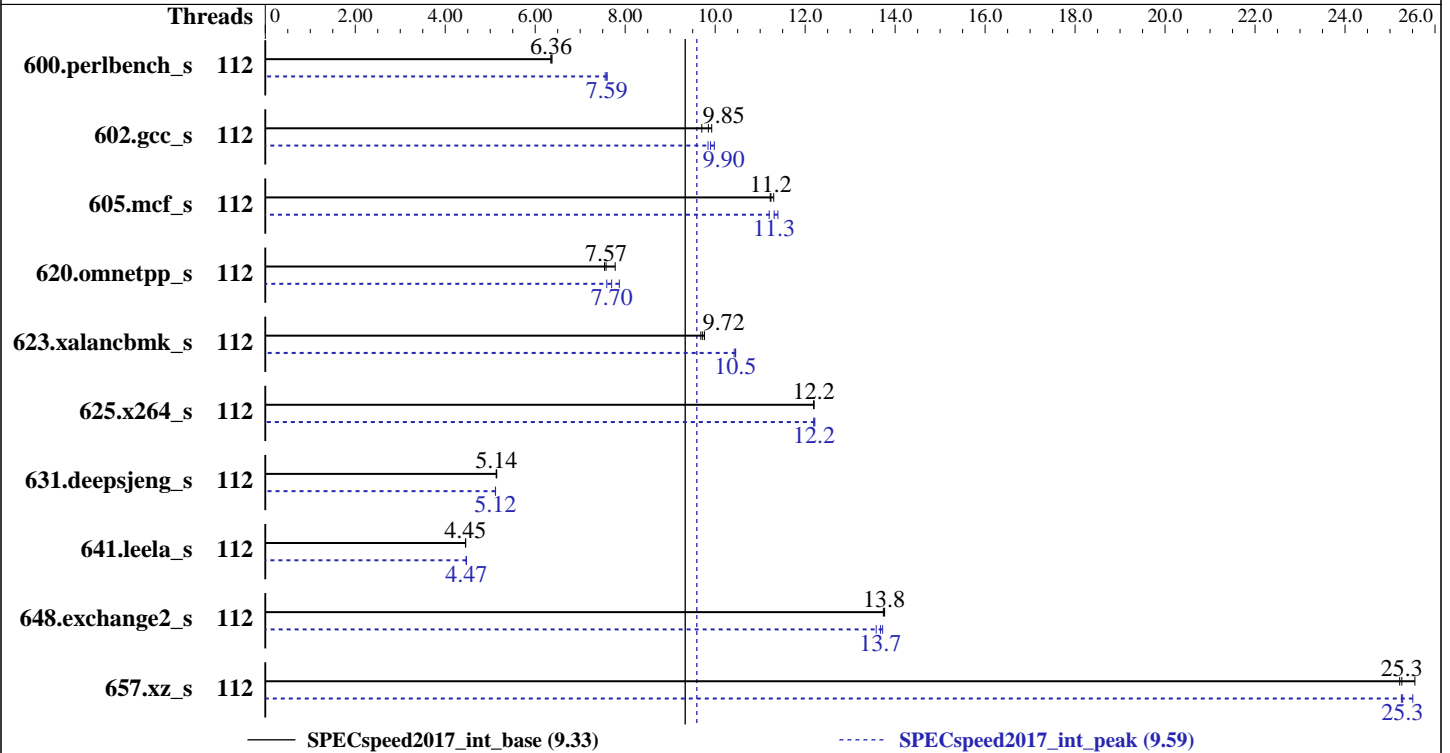

### Hardware

CPU Name: Intel Xeon Platinum 8180  
 Max MHz.: 3800  
 Nominal: 2500  
 Enabled: 112 cores, 4 chips  
 Orderable: 2,4 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 900 GB 15K RPM SAS12  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 1.1.7 released Aug-2017  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.0.1;  
 jemalloc: configured and built at default for  
 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4,  
 and the system compiler gcc 4.8.5;  
 jemalloc: sources available from jemalloc.net or  
 releases



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2017  
Hardware Availability: Jul-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	280	6.35	278	6.37	<b><u>279</u></b>	<b><u>6.36</u></b>	112	234	7.60	<b><u>234</u></b>	<b><u>7.59</u></b>	235	7.55
602.gcc_s	112	<b><u>404</u></b>	<b><u>9.85</u></b>	410	9.70	401	9.92	112	399	9.98	405	9.84	<b><u>402</u></b>	<b><u>9.90</u></b>
605.mcf_s	112	421	11.2	<b><u>420</u></b>	<b><u>11.2</u></b>	418	11.3	112	422	11.2	<b><u>417</u></b>	<b><u>11.3</u></b>	414	11.4
620.omnetpp_s	112	<b><u>215</u></b>	<b><u>7.57</u></b>	216	7.54	210	7.78	112	215	7.59	207	7.87	<b><u>212</u></b>	<b><u>7.70</u></b>
623.xalancbmk_s	112	146	9.68	145	9.76	<b><u>146</u></b>	<b><u>9.72</u></b>	112	136	10.4	136	10.5	<b><u>136</u></b>	<b><u>10.5</u></b>
625.x264_s	112	145	12.2	145	12.2	<b><u>145</u></b>	<b><u>12.2</u></b>	112	145	12.2	<b><u>145</u></b>	<b><u>12.2</u></b>	144	12.2
631.deepsjeng_s	112	<b><u>279</u></b>	<b><u>5.14</u></b>	279	5.13	279	5.14	112	280	5.12	<b><u>280</u></b>	<b><u>5.12</u></b>	280	5.11
641.leela_s	112	<b><u>383</u></b>	<b><u>4.45</u></b>	383	4.45	383	4.45	112	382	4.47	<b><u>382</u></b>	<b><u>4.47</u></b>	382	4.47
648.exchange2_s	112	<b><u>214</u></b>	<b><u>13.8</u></b>	214	13.7	214	13.8	112	<b><u>215</u></b>	<b><u>13.7</u></b>	217	13.6	214	13.7
657.xz_s	112	242	25.6	<b><u>245</u></b>	<b><u>25.3</u></b>	245	25.2	112	242	25.5	<b><u>245</u></b>	<b><u>25.3</u></b>	245	25.3

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

## Platform Notes

BIOS settings:

Logical Processor Disabled

Virtualization Technology Disabled

Sub NUMA Cluster Disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C1E Disabled

C States set to Autonomous

Uncore Frequency set to Dynamic

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Memory Patrol Scrub Disabled  
 Energy Efficiency Policy set to Performance  
 CPU Interconnect Bus Link Power Management Disabled  
 PCI ASPM L1 Link Power Management Disabled  
 Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on linux-ly5k Fri Oct 13 02:50:36 2017

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 4 "physical id"s (chips)
 112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 28
  siblings    : 28
 physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
 physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
 physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
 physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
```

```
From lscpu:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:         Little Endian
CPU(s):             112
On-line CPU(s) list: 0-111
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s):          4
NUMA node(s):      4
Vendor ID:          GenuineIntel
CPU family:         6
Model:              85
Model name:         Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping:           4
CPU MHz:            2494.145
BogoMIPS:           4988.29
Virtualization:     VT-x
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 39424K

NUMA node0 CPU(s):

0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64, 68, 72, 76, 80, 84, 88, 92, 96, 100, 104, 108

NUMA node1 CPU(s):

1, 5, 9, 13, 17, 21, 25, 29, 33, 37, 41, 45, 49, 53, 57, 61, 65, 69, 73, 77, 81, 85, 89, 93, 97, 101, 105, 109

NUMA node2 CPU(s):

2, 6, 10, 14, 18, 22, 26, 30, 34, 38, 42, 46, 50, 54, 58, 62, 66, 70, 74, 78, 82, 86, 90, 94, 98, 102, 106, 110

NUMA node3 CPU(s):

3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 47, 51, 55, 59, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 107, 111

Flags:

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc  
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg  
fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes  
xsave avx fl6c rdrand lahf\_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel\_pt  
tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2  
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd  
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc cqm\_occup\_llc

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96  
100 104 108

node 0 size: 192118 MB

node 0 free: 191424 MB

node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97  
101 105 109

node 1 size: 193521 MB

node 1 free: 192958 MB

node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98  
102 106 110

node 2 size: 193521 MB

node 2 free: 192914 MB

node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99  
103 107 111

node 3 size: 193518 MB

node 3 free: 192956 MB

node distances:

```
node  0  1  2  3
0:   10  21  21  21
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```

1:  21  10  21  21
2:  21  21  10  21
3:  21  21  21  10

```

From /proc/meminfo

```

MemTotal:      791224424 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2

```

```

# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux linux-ly5k 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 13 02:50

SPEC is set to: /home/cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   796G   17G  779G   3% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 08/10/2017

Memory:

48x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base, peak) 657.xz\_s(base)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base) 641.leela\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 620.omnetpp\_s(peak) 623.xalancbmk\_s(peak) 631.deepsjeng\_s(peak) 641.leela\_s(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 648.exchange2\_s(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

## Base Other Flags (Continued)

Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

```

```

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp

```

(Continued on next page)





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

605.mcf\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
```

```
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

625.x264\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
```

```
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

623.xalancbmk\_s: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32

```
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
```

```
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
```

```
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECspeed2017\_int\_base = 9.33

SPECspeed2017\_int\_peak = 9.59

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Sep-2017

## Peak Other Flags (Continued)

623.xalancbmk\_s: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-13 05:50:35-0400.

Report generated on 2018-10-31 15:03:41 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-02.