



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

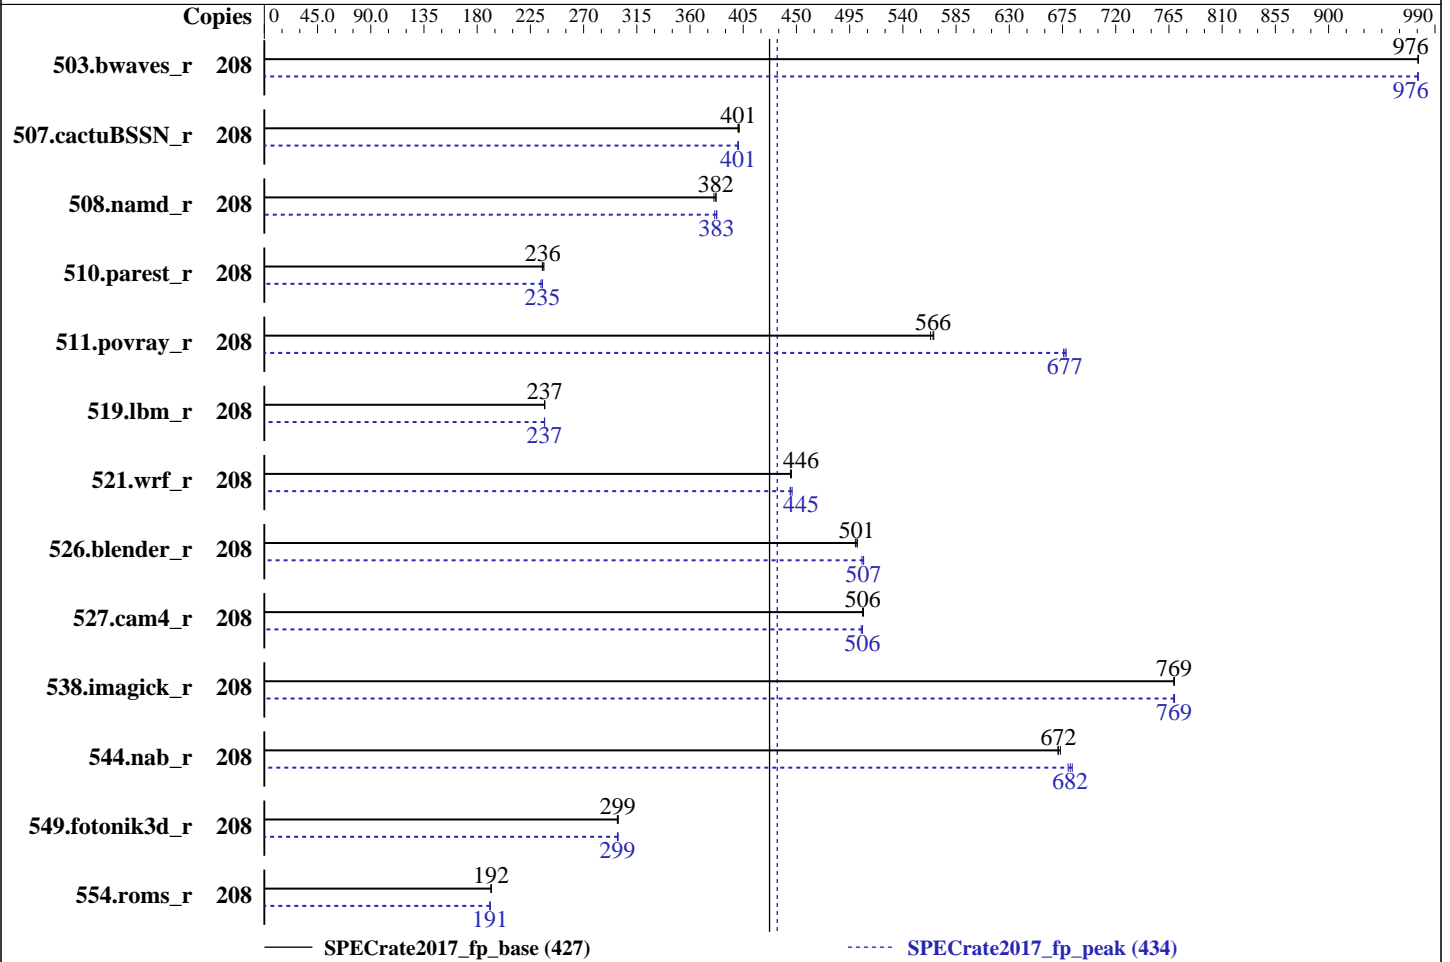

Hardware

CPU Name: Intel Xeon Platinum 8164
 Max MHz.: 3700
 Nominal: 2000
 Enabled: 104 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 900 GB 15K RPM SAS12
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Version 1.1.7 released Aug-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	208	2137	976	2138	976	2137	976	208	2138	976	2139	975	2138	976
507.cactuBSSN_r	208	657	401	657	401	656	402	208	658	400	657	401	657	401
508.namd_r	208	520	380	517	382	518	382	208	519	381	517	383	517	383
510.parest_r	208	2309	236	2301	236	2315	235	208	2326	234	2313	235	2314	235
511.povray_r	208	862	563	859	566	858	566	208	717	677	716	678	719	676
519.lbm_r	208	925	237	925	237	925	237	208	925	237	926	237	925	237
521.wrf_r	208	1045	446	1047	445	1046	446	208	1047	445	1044	446	1048	445
526.blender_r	208	632	501	632	501	634	500	208	625	507	625	507	627	505
527.cam4_r	208	718	507	719	506	719	506	208	719	506	721	505	719	506
538.imagick_r	208	673	769	672	769	672	770	208	673	769	672	770	672	769
544.nab_r	208	522	671	520	673	521	672	208	512	683	514	682	515	680
549.fotonik3d_r	208	2708	299	2715	299	2711	299	208	2713	299	2714	299	2709	299
554.roms_r	208	1722	192	1723	192	1724	192	208	1729	191	1733	191	1732	191

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Platform Notes

BIOS settings:

```

Logical Processor Enabled
Virtualization Technology Disabled
Sub NUMA Cluster Enabled
System Profile set to Custom
CPU Performance set to Maximum Performance
CIE Disabled
C States set to Autonomous
Uncore Frequency set to Dynamic
Memory Patrol Scrub Disabled
Energy Efficiency Policy set to Performance
CPU Interconnect Bus Link Power Management Disabled
PCI ASPM L1 Link Power Management Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-92x1 Sun Oct 15 14:06:46 2017

```

SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
 4 "physical id"s (chips)
 208 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 26
siblings : 52
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
 29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
 29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
 29

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                208
On-line CPU(s) list:   0-207
Thread(s) per core:    2
Core(s) per socket:    26
Socket(s):              4

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

NUMA node(s):      8
Vendor ID:         GenuineIntel
CPU family:        6
Model:             85
Model name:        Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
Stepping:          4
CPU MHz:           1995.304
BogoMIPS:          3990.60
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          1024K
L3 cache:          36608K
NUMA node0 CPU(s):
0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 176, 184, 192, 200
NUMA node1 CPU(s):
1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121, 129, 137, 145, 153, 161, 169, 177, 185, 193, 201
NUMA node2 CPU(s):
2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, 178, 186, 194, 202
NUMA node3 CPU(s):
3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123, 131, 139, 147, 155, 163, 171, 179, 187, 195, 203
NUMA node4 CPU(s):
4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, 180, 188, 196, 204
NUMA node5 CPU(s):
5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125, 133, 141, 149, 157, 165, 173, 181, 189, 197, 205
NUMA node6 CPU(s):
6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126, 134, 142, 150, 158, 166, 174, 182, 190, 198, 206
NUMA node7 CPU(s):
7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 103, 111, 119, 127, 135, 143, 151, 159, 167, 175, 183, 191, 199, 207
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152 160 168
176 184 192 200
node 0 size: 95358 MB
node 0 free: 94873 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153 161 169
177 185 193 201
node 1 size: 96760 MB
node 1 free: 96369 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154 162 170
178 186 194 202
node 2 size: 96760 MB
node 2 free: 96382 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155 163 171
179 187 195 203
node 3 size: 96760 MB
node 3 free: 96380 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156 164 172
180 188 196 204
node 4 size: 96760 MB
node 4 free: 96383 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157 165 173
181 189 197 205
node 5 size: 96760 MB
node 5 free: 96367 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158 166 174
182 190 198 206
node 6 size: 96760 MB
node 6 free: 96372 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159 167 175
183 191 199 207
node 7 size: 96757 MB
node 7 free: 96370 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  21  21  11  21  21  21
  1:  21  10  21  21  21  11  21  21
  2:  21  21  10  21  21  21  11  21
  3:  21  21  21  10  21  21  21  11
  4:  11  21  21  21  10  21  21  21
  5:  21  11  21  21  21  10  21  21
  6:  21  21  11  21  21  21  10  21
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Platform Notes (Continued)

7: 21 21 21 11 21 21 21 10

From /proc/meminfo

MemTotal: 791223344 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-92x1 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 15 02:57

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xf	796G	17G	779G	3%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 08/10/2017

Memory:

48x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(peak) 527.cam4_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Jul-2017
Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both C and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Platinum 8164, 2.00 GHz)

SPECrate2017_fp_base = 427

SPECrate2017_fp_peak = 434

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Jul-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-15 17:06:45-0400.

Report generated on 2018-10-31 12:47:46 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-14.