



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

**SPECrate2017\_fp\_base = 440**

**SPECrate2017\_fp\_peak = 447**

CPU2017 License: 9017


**Test Date:** Oct-2017

Test Sponsor: Lenovo Global Technology

**Hardware Availability:** Sep-2017

Tested by: Lenovo Global Technology

**Software Availability:** Sep-2017

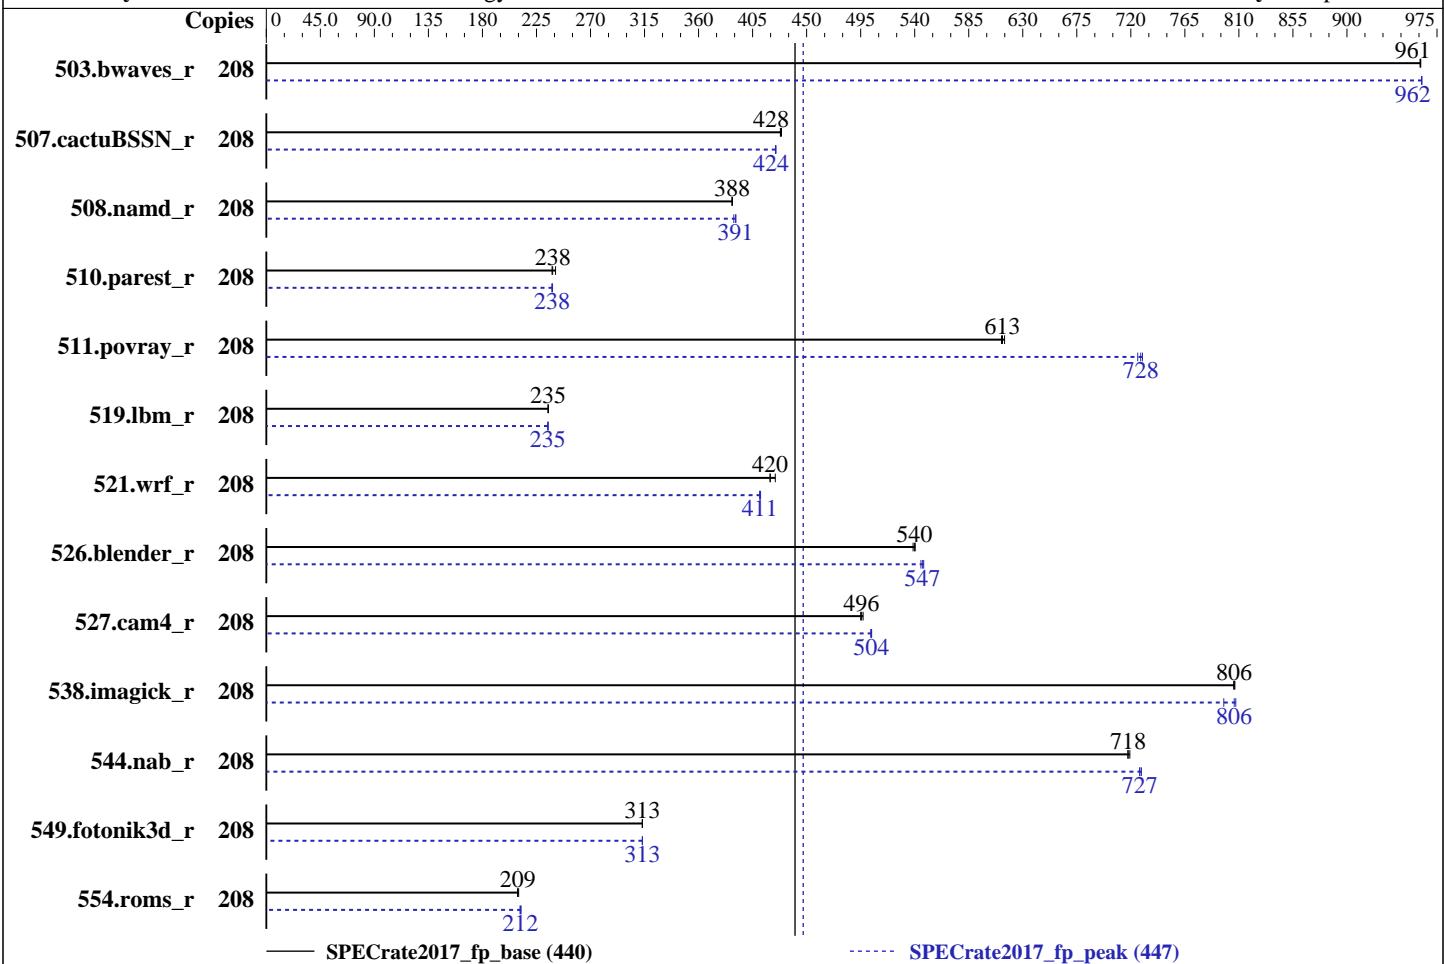

— SPECrate2017\_fp\_base (440)

----- SPECrate2017\_fp\_peak (447)

### Hardware

CPU Name: Intel Xeon Platinum 8170M  
Max MHz.: 3700  
Nominal: 2100  
Enabled: 104 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 800 GB tmpfs  
Other: None

### OS:

SUSE Linux Enterprise Server 12 SP2 (x86\_64)

Compiler: Kernel 4.4.21-69-default

C/C++: Version 18.0.0.128 of Intel C/C++

Compiler for Linux;

Fortran: Version 18.0.0.128 of Intel Fortran

Compiler for Linux

Parallel: No

Firmware: Lenovo BIOS Version PSE103K 1.00 released Jun-2017

File System: tmpfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: None

### Software



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

**SPECrate2017\_fp\_base = 440**

**SPECrate2017\_fp\_peak = 447**

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	208	2171	961	<b>2170</b>	<b>961</b>	2169	961	208	2168	962	<b>2168</b>	<b>962</b>	2167	963		
507.cactusBSSN_r	208	614	429	<b>615</b>	<b>428</b>	615	428	208	<b>621</b>	<b>424</b>	621	424	621	424		
508.namd_r	208	510	388	509	388	<b>509</b>	<b>388</b>	208	505	391	<b>506</b>	<b>391</b>	508	389		
510.parest_r	208	2259	241	<b>2282</b>	<b>238</b>	2286	238	208	2287	238	2283	238	<b>2286</b>	<b>238</b>		
511.povray_r	208	790	615	<b>792</b>	<b>613</b>	793	612	208	<b>667</b>	<b>728</b>	669	726	666	730		
519.lbm_r	208	934	235	933	235	<b>934</b>	<b>235</b>	208	935	235	<b>935</b>	<b>235</b>	934	235		
521.wrf_r	208	1099	424	<b>1110</b>	<b>420</b>	1110	420	208	1132	412	<b>1134</b>	<b>411</b>	1134	411		
526.blender_r	208	<b>587</b>	<b>540</b>	586	540	588	539	208	<b>580</b>	<b>547</b>	581	545	579	548		
527.cam4_r	208	732	497	735	495	<b>734</b>	<b>496</b>	208	723	503	<b>722</b>	<b>504</b>	722	504		
538.imagick_r	208	642	806	<b>642</b>	<b>806</b>	641	807	208	649	797	641	807	<b>642</b>	<b>806</b>		
544.nab_r	208	488	718	487	719	<b>488</b>	<b>718</b>	208	481	727	480	729	<b>481</b>	<b>727</b>		
549.fotonik3d_r	208	<b>2588</b>	<b>313</b>	2589	313	2588	313	208	2588	313	<b>2588</b>	<b>313</b>	2588	313		
554.roms_r	208	1579	209	1573	210	<b>1578</b>	<b>209</b>	208	1564	211	1558	212	<b>1561</b>	<b>212</b>		

**SPECrate2017\_fp\_base = 440**

**SPECrate2017\_fp\_peak = 447**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem can be set with:

```
mount -t tmpfs -o size=800g tmpfs /home
```

Process tuning setting:

```
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
```

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## General Notes (Continued)

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance  
SNC set to Enable

Hardware Prefetcher set to Disable

MONITORWAIT set to Enable

Execute Disable Bit set to Disable

Intel Virtualization Technology set to Disable

DCA set to Enable

XPT Prefetcher set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-uyxw Thu Oct 19 11:31:20 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz
  4 "physical id"s (chips)
  208 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 26
siblings : 52
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28
29
```

From lscpu:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

**SPECrate2017\_fp\_base = 440**

**SPECrate2017\_fp\_peak = 447**

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
CPU(s):	208
On-line CPU(s) list:	0-207
Thread(s) per core:	2
Core(s) per socket:	26
Socket(s):	4
NUMA node(s):	8
Vendor ID:	GenuineIntel
CPU family:	6
Model:	85
Model name:	Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz
Stepping:	4
CPU MHz:	2095.065
BogoMIPS:	4190.13
Virtualization:	VT-x
L1d cache:	32K
L1i cache:	32K
L2 cache:	1024K
L3 cache:	36608K
NUMA node0 CPU(s):	0-3,7-9,13-15,20-22,104-107,111-113,117-119,124-126
NUMA node1 CPU(s):	4-6,10-12,16-19,23-25,108-110,114-116,120-123,127-129
NUMA node2 CPU(s):	26-29,33-35,39-41,46-48,130-133,137-139,143-145,150-152
NUMA node3 CPU(s):	30-32,36-38,42-45,49-51,134-136,140-142,146-149,153-155
NUMA node4 CPU(s):	52-55,59-61,65-67,72-74,156-159,163-165,169-171,176-178
NUMA node5 CPU(s):	56-58,62-64,68-71,75-77,160-162,166-168,172-175,179-181
NUMA node6 CPU(s):	78-81,85-87,91-93,98-100,182-185,189-191,195-197,202-204
NUMA node7 CPU(s):	82-84,88-90,94-97,101-103,186-188,192-194,198-201,205-207
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 104 105 106 107 111 112 113 117 118 119
124 125 126
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 0 size: 192979 MB
node 0 free: 192356 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 108 109 110 114 115 116 120 121 122
123 127 128 129
node 1 size: 193521 MB
node 1 free: 192903 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 130 131 132 133 137 138 139 143 144
145 150 151 152
node 2 size: 193521 MB
node 2 free: 192959 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 134 135 136 140 141 142 146 147 148
149 153 154 155
node 3 size: 193521 MB
node 3 free: 192118 MB
node 4 cpus: 52 53 54 55 59 60 61 65 66 67 72 73 74 156 157 158 159 163 164 165 169 170
171 176 177 178
node 4 size: 193521 MB
node 4 free: 188776 MB
node 5 cpus: 56 57 58 62 63 64 68 69 70 71 75 76 77 160 161 162 166 167 168 172 173 174
175 179 180 181
node 5 size: 193521 MB
node 5 free: 184247 MB
node 6 cpus: 78 79 80 81 85 86 87 91 92 93 98 99 100 182 183 184 185 189 190 191 195
196 197 202 203 204
node 6 size: 193521 MB
node 6 free: 192943 MB
node 7 cpus: 82 83 84 88 89 90 94 95 96 97 101 102 103 186 187 188 192 193 194 198 199
200 201 205 206 207
node 7 size: 193516 MB
node 7 free: 192956 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

MemTotal: 1584766288 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

```
SuSE-release:  
SUSE Linux Enterprise Server 12 (x86_64)  
VERSION = 12  
PATCHLEVEL = 2  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.
```

```
os-release:  
NAME="SLES"  
VERSION="12-SP2"  
VERSION_ID="12.2"  
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"  
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:  
Linux linux-uyxw 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)  
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 19 11:30
```

```
SPEC is set to: /home/cpu2017.1.0.2.ic18.0  
Filesystem      Type   Size  Used Avail Use% Mounted on  
tmpfs          tmpfs   800G   11G   790G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[PSE103K-1.00]- 06/19/2017

Memory:

```
48x NO DIMM NO DIMM  
48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

CC 519.lbm\_r(peak) 544.nab\_r(peak)

=====

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CXXC 508.namd_r(base) 510.parest_r(base)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CXXC 508.namd_r(peak) 510.parest_r(peak)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CC 511.povray_r(base) 526.blender_r(base)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
CC 511.povray_r(peak) 526.blender_r(peak)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

=====

=====

```
FC 507.cactubSSN_r(base)
```

=====

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

=====

FC 507.cactubSSN\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactusBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR950  
(2.10 GHz, Intel Xeon Platinum 8170M)

SPECrate2017\_fp\_base = 440

SPECrate2017\_fp\_peak = 447

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-18 23:31:19-0400.

Report generated on 2018-10-31 14:48:56 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-22.