



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

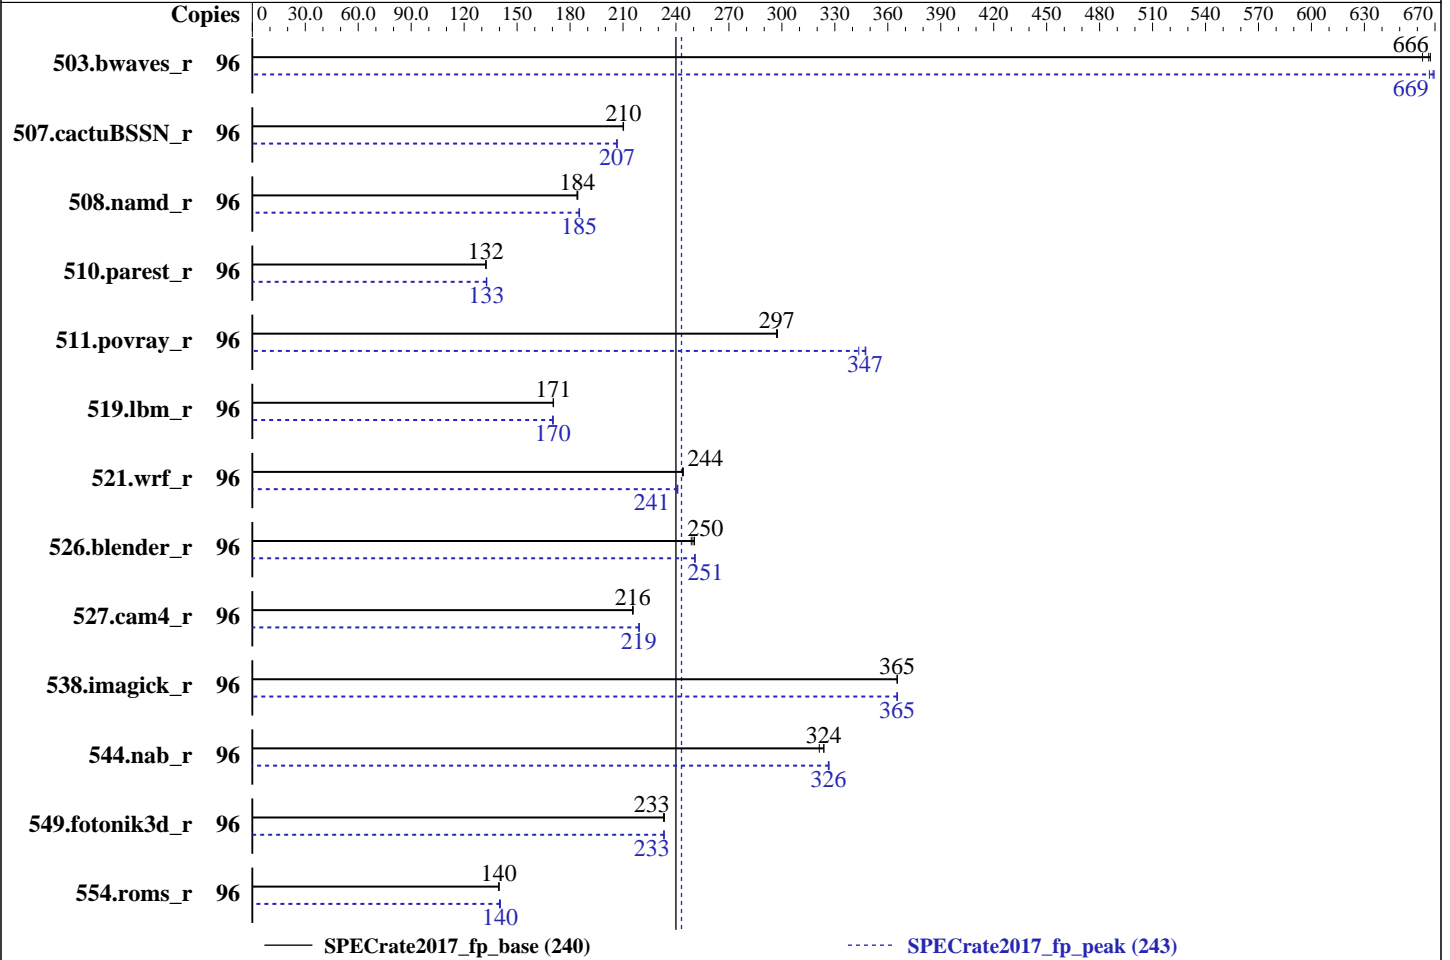

### Hardware

CPU Name: Intel Xeon Gold 5118  
 Max MHz.: 3200  
 Nominal: 2300  
 Enabled: 48 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version IVE111I 1.01 released Aug-2017  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Oct-2017  
Hardware Availability: Aug-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1442	667	<b>1445</b>	<b>666</b>	1452	663	96	<b>1439</b>	<b>669</b>	1444	667	1438	669
507.cactuBSSN_r	96	<b>578</b>	<b>210</b>	578	210	579	210	96	<b>588</b>	<b>207</b>	589	206	588	207
508.namd_r	96	<b>495</b>	<b>184</b>	495	184	496	184	96	492	185	<b>493</b>	<b>185</b>	493	185
510.parest_r	96	<b>1897</b>	<b>132</b>	1899	132	1897	132	96	<b>1892</b>	<b>133</b>	1895	133	1891	133
511.povray_r	96	<b>754</b>	<b>297</b>	754	297	755	297	96	645	348	652	344	<b>646</b>	<b>347</b>
519.lbm_r	96	594	170	<b>593</b>	<b>171</b>	593	171	96	594	170	595	170	<b>594</b>	<b>170</b>
521.wrf_r	96	<b>882</b>	<b>244</b>	883	244	881	244	96	<b>893</b>	<b>241</b>	892	241	894	241
526.blender_r	96	<b>586</b>	<b>250</b>	584	251	588	249	96	583	251	583	251	<b>583</b>	<b>251</b>
527.cam4_r	96	779	215	<b>779</b>	<b>216</b>	779	216	96	766	219	767	219	<b>767</b>	<b>219</b>
538.imagick_r	96	654	365	<b>653</b>	<b>365</b>	653	365	96	653	365	<b>654</b>	<b>365</b>	654	365
544.nab_r	96	503	321	499	324	<b>499</b>	<b>324</b>	96	494	327	495	326	<b>495</b>	<b>326</b>
549.fotonik3d_r	96	1603	233	1605	233	<b>1604</b>	<b>233</b>	96	1605	233	<b>1604</b>	<b>233</b>	1603	233
554.roms_r	96	1092	140	1091	140	<b>1092</b>	<b>140</b>	96	<b>1087</b>	<b>140</b>	1086	141	1089	140

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 240

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
SNC set to Enable  
Hardware Prefetcher set to Disable  
MONITORMWAIT set to Enable  
Execute Disable Bit set to Disable  
Intel Virtualization Technology set to Disable  
DCA set to Enable  
XPT Prefetcher set to Enable  
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on SN850 Thu Oct 26 05:19:53 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz  
4 "physical id"s (chips)  
96 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 12  
siblings : 24  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13  
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13  
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 96  
On-line CPU(s) list: 0-95  
Thread(s) per core: 2  
Core(s) per socket: 12  
Socket(s): 4  
NUMA node(s): 8  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz  
Stepping: 4  
CPU MHz: 2294.612  
BogoMIPS: 4589.22

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

Virtualization:      VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           16896K
NUMA node0 CPU(s):  0-2,6-8,48-50,54-56
NUMA node1 CPU(s):  3-5,9-11,51-53,57-59
NUMA node2 CPU(s):  12-14,18-20,60-62,66-68
NUMA node3 CPU(s):  15-17,21-23,63-65,69-71
NUMA node4 CPU(s):  24-26,30-32,72-74,78-80
NUMA node5 CPU(s):  27-29,33-35,75-77,81-83
NUMA node6 CPU(s):  36-38,42-44,84-86,90-92
NUMA node7 CPU(s):  39-41,45-47,87-89,93-95
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 48 49 50 54 55 56
node 0 size: 193131 MB
node 0 free: 192338 MB
node 1 cpus: 3 4 5 9 10 11 51 52 53 57 58 59
node 1 size: 193528 MB
node 1 free: 192916 MB
node 2 cpus: 12 13 14 18 19 20 60 61 62 66 67 68
node 2 size: 193528 MB
node 2 free: 192915 MB
node 3 cpus: 15 16 17 21 22 23 63 64 65 69 70 71
node 3 size: 193528 MB
node 3 free: 192889 MB
node 4 cpus: 24 25 26 30 31 32 72 73 74 78 79 80
node 4 size: 193528 MB
node 4 free: 192931 MB
node 5 cpus: 27 28 29 33 34 35 75 76 77 81 82 83
node 5 size: 193528 MB
node 5 free: 192915 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

node 6 cpus: 36 37 38 42 43 44 84 85 86 90 91 92
node 6 size: 193528 MB
node 6 free: 192881 MB
node 7 cpus: 39 40 41 45 46 47 87 88 89 93 94 95
node 7 size: 193525 MB
node 7 free: 192789 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 31 31
  1: 11 10 21 21 21 21 31 31
  2: 21 21 10 11 31 31 21 21
  3: 21 21 11 10 31 31 21 21
  4: 21 21 31 31 10 11 21 21
  5: 21 21 31 31 11 10 21 21
  6: 31 31 21 21 21 21 10 11
  7: 31 31 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      1584975680 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux SN850 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 25 18:59

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda4       xfs       836G      20G  817G   3% /home

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE111I-1.01]- 08/11/2017

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base)  
=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CC 519.lbm\_r(peak) 544.nab\_r(peak)  
=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Compiler Version Notes (Continued)

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)

=====  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)

=====  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(peak)

=====  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

=====  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 554.roms\_r(peak)

=====  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
=====

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Portability Flags (Continued)

```
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SN850  
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate2017\_fp\_base = 240

SPECrate2017\_fp\_peak = 243

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-F.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-25 17:19:52-0400.

Report generated on 2018-10-31 16:11:34 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-21.