



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 191

CPU2017 License: 19


Test Date: Nov-2017

Test Sponsor: Fujitsu

Hardware Availability: Apr-2017

Tested by: Fujitsu

Software Availability: Jul-2017

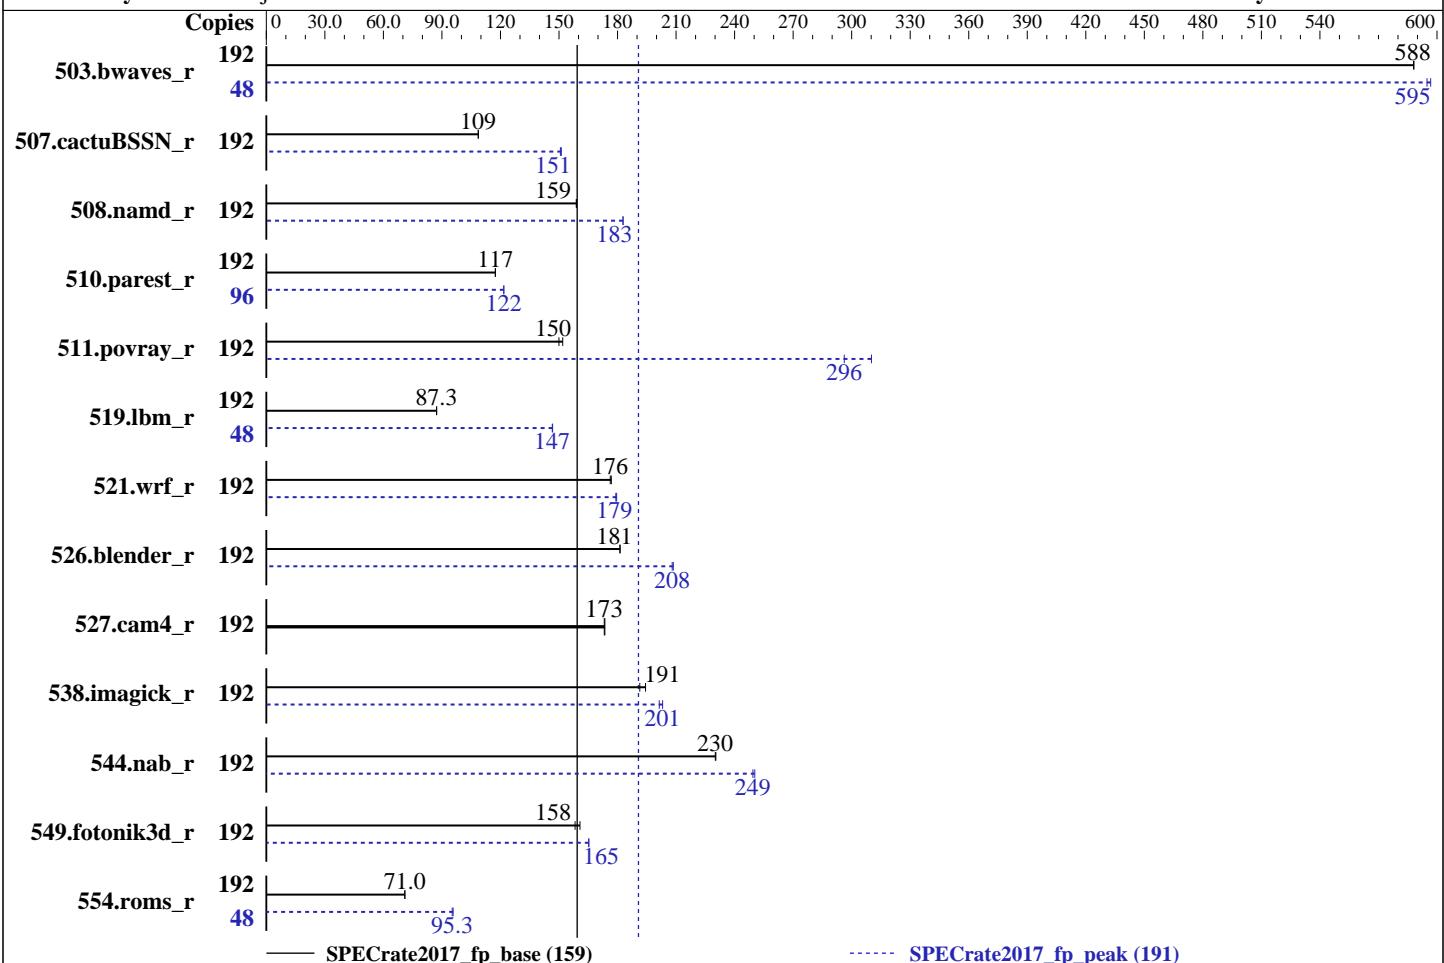

Hardware

CPU Name: SPARC64 XII
 Max MHz.: 3900
 Nominal: 3900
 Enabled: 24 cores, 2 chips, 8 threads/core
 Orderable: 1 or 2 CPU chips; 2, 3, 4, .. 24 cores
 Cache L1: 64 KB I + 64 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 32 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx4 PC4-2400T-R)
 Storage: 1 x 600 GB 10K RPM SAS (for system disk)
 Other: None

Software

OS: Oracle Solaris 11.3 SRU 24.4
 Compiler: C/C++/Fortran: Version 12.6 of Oracle Developer Studio
 Parallel: No
 Firmware: Fujitsu HCP Version 3040 released Oct-2017
 File System: tmpfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2	SPECrate2017_fp_base = 159 SPECrate2017_fp_peak = 191
--------------------------------	--

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	3275	588	3273	588			48	809	595	807	597				
507.cactusBSSN_r	192	2237	109	2238	109			192	1613	151	1608	151				
508.namd_r	192	1148	159	1148	159			192	998	183	998	183				
510.parest_r	192	4279	117	4279	117			96	2063	122	2064	122				
511.povray_r	192	2951	152	2989	150			192	1514	296	1446	310				
519.lbm_r	192	2318	87.3	2319	87.3			48	345	147	345	147				
521.wrf_r	192	2440	176	2432	177			192	2395	180	2401	179				
526.blender_r	192	1614	181	1612	181			192	1402	209	1406	208				
527.cam4_r	192	1939	173	1935	174			192	1939	173	1935	174				
538.imagick_r	192	2495	191	2457	194			192	2351	203	2371	201				
544.nab_r	192	1404	230	1402	230			192	1291	250	1296	249				
549.fotonik3d_r	192	4655	161	4729	158			192	4527	165	4527	165				
554.roms_r	192	4299	71.0	4295	71.0			48	797	95.7	801	95.3				

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 191

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands.
The config file option 'submit' was used, along with a list of
processors in the 'BIND' variable, to generate the pbind commands.
(For details, please see the config file.)

Operating System Notes

Shell Environments:

```
ulimit -s 131072 was used to limit the space consumed by the stack
(and therefore make more space available to the heap).
```

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:

```
(/etc/system parameters)
autoup = 86400
    Causes pages older than the listed number of seconds to be written by fsflush.
doiflush = 0
    Controls whether file system metadata syncs will be executed during fsflush invocations.
dopageflush = 0
    Controls whether memory is examined for modified pages during fsflush invocations.
zfs:zfs_arc_max=1073741824
    Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2	SPECrate2017_fp_base = 159 SPECrate2017_fp_peak = 191
--------------------------------	--

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

General Notes

File System:

tmpfs: output_root was used to put run directories in /tmp/cpu2017
zfs: operating system

Binaries were compiled on a system with 2x SPARC64 XII CPU + 1TB Memory using Oracle Solaris 11.3 SRU 24.4

Platform Notes

Sysinfo program /export/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on loaner Thu Nov 30 07:17:42 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo
SPARC64-XII (chipid 0, clock 3900 MHz)
SPARC64-XII (chipid 1, clock 3900 MHz)
2 chips
192 threads
3900 MHz

From kstat: 24 cores

From prtconf: 1046016 Megabytes

/etc/release:
Oracle Solaris 11.3 SPARC
uname -a:
SunOS loaner 5.11 11.3 sun4v sparc sun4v

disk: df -h /export/cpu2017
Filesystem Size Used Available Capacity Mounted on
rpool/export 547G 3.8G 401G 1% /export

(End of data from sysinfo program)

Compiler Version Notes

=====
CXXC 508.namd_r(base) 510.parest_r(base)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 191

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Compiler Version Notes (Continued)

=====

CXXC 508.namd_r(peak) 510.parest_r(peak)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

=====

CC 511.povray_r(base) 526.blender_r(base)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

=====

CC 511.povray_r(peak) 526.blender_r(peak)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

=====

FC 507.cactuBSSN_r(base)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

=====

FC 507.cactuBSSN_r(peak)

CC: Studio 12.6 Sun C++ 5.15 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

=====

CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

=====

CC 519.lbm_r(peak) 538.imagick_r(peak) 544.nab_r(peak)

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 191

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Compiler Version Notes (Continued)

=====

FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

=====

FC 503.bwaves_r(peak) 549.fotonik3d_r(peak) 554.roms_r(peak)

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

=====

CC 521.wrf_r(base) 527.cam4_r(base)

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

f90: Studio 12.6 Fortran 95 8.8 SunOS_sparc 2017/05/30

cc: Studio 12.6 Sun C 5.15 SunOS_sparc 2017/05/30

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

f90 cc

Benchmarks using both C and C++:

CC cc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2	SPECrate2017_fp_base = 159 SPECrate2017_fp_peak = 191
--------------------------------	--

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

CC cc f90

Base Portability Flags

503.bwaves_r: -D_FILE_OFFSET_BITS=64
507.cactusBSSN_r: -DSPEC_NO_C99_MATH_IN_CXX -D_FILE_OFFSET_BITS=64
508.namd_r: -D_FILE_OFFSET_BITS=64
510.parest_r: -D_FILE_OFFSET_BITS=64
511.povray_r: -D_FILE_OFFSET_BITS=64
519.lbm_r: -D_FILE_OFFSET_BITS=64
521.wrf_r: -D_FILE_OFFSET_BITS=64
526.blender_r: -DSPEC_NO_ISFINITE -xchar=u -D_FILE_OFFSET_BITS=64
527.cam4_r: -D_FILE_OFFSET_BITS=64
538.imagick_r: -D_FILE_OFFSET_BITS=64
544.nab_r: -D_FILE_OFFSET_BITS=64
549.fotonik3d_r: -D_FILE_OFFSET_BITS=64
554.roms_r: -D_FILE_OFFSET_BITS=64

Base Optimization Flags

C benchmarks:

-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std

C++ benchmarks:

-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=compatible -std=c++03
-lfast

Fortran benchmarks:

-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput

Benchmarks using both Fortran and C:

-m32 -fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std

Benchmarks using both C and C++:

-m32 -fast(CC) -fast(cc) -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std
-xalias_level=compatible -std=c++03 -lfast

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 191

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-m32 -fast(CC) -fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2  
-xpagesize=4M -xsegment_align=4M -xthroughput -xalias_level=std  
-xalias_level=compatible -std=c++03 -lfast
```

Base Other Flags

C benchmarks:

```
-xjobs=8
```

C++ benchmarks:

```
-xjobs=8
```

Fortran benchmarks:

```
-xjobs=8
```

Benchmarks using both Fortran and C:

```
-xjobs=8
```

Benchmarks using both C and C++:

```
-xjobs=8
```

Benchmarks using Fortran, C, and C++:

```
-xjobs=8
```

Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Fortran benchmarks:

```
f90
```

Benchmarks using both Fortran and C:

```
f90 cc
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2	SPECrate2017_fp_base = 159 SPECrate2017_fp_peak = 191
--------------------------------	--

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

CC cc

Benchmarks using Fortran, C, and C++:

CC cc f90

Peak Portability Flags

503.bwaves_r: -D_FILE_OFFSET_BITS=64
507.cactuBSSN_r: -DSPEC_NO_C99_MATH_IN_CXX -DSPEC_LP64
508.namd_r: -D_FILE_OFFSET_BITS=64
510.parest_r: -D_FILE_OFFSET_BITS=64
511.povray_r: -D_FILE_OFFSET_BITS=64
519.lbm_r: -D_FILE_OFFSET_BITS=64
521.wrf_r: -D_FILE_OFFSET_BITS=64
526.blender_r: -DSPEC_NO_ISFINITE -xchar=u -D_FILE_OFFSET_BITS=64
527.cam4_r: -D_FILE_OFFSET_BITS=64
538.imagick_r: -DSPEC_LP64
544.nab_r: -D_FILE_OFFSET_BITS=64
549.fotonik3d_r: -D_FILE_OFFSET_BITS=64
554.roms_r: -D_FILE_OFFSET_BITS=64

Peak Optimization Flags

C benchmarks:

519.lbm_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xppagesize=256M
-xsegment_align=256M -xthroughput -x04
-xtarget=sparc64xplus -xprefetch=latx:0.9
-xprefetch_auto_type=indirect_array_access -xunroll=2
-W2,-Afully_unroll:always=on -Wc,-Qiselect-funcalign=64

538.imagick_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xppagesize=256M
-xsegment_align=256M -xthroughput -x04 -m64
-xtarget=sparc64xplus -xinline_param=level:3
-xprefetch=latx:0.7
-xprefetch_auto_type=indirect_array_access -xunroll=4
-Wc,-Qiselect-funcalign=4

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2	SPECrate2017_fp_base = 159 SPECrate2017_fp_peak = 191
--------------------------------	--

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Peak Optimization Flags (Continued)

```
544.nab_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -x04 -xunroll=3
```

C++ benchmarks:

```
508.namd_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xppagesize=256M
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus
-xalias_level=compatible -Wc,-Qms_pipe+alldoall -std=c++03
```

```
510.parest_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xppagesize=256M
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus
-xalias_level=compatible -xthroughput=no
-xprefetch=no%auto -std=c++03
```

Fortran benchmarks:

```
503.bwaves_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xppagesize=256M
-xsegment_align=256M -xthroughput -xinline_param=level:1
-xprefetch=latx:0.5
```

```
549.fotonik3d_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xppagesize=256M
-xsegment_align=256M -xthroughput -xthroughput=no
-xprefetch=latx:0.8
-xprefetch_auto_type=indirect_array_access -W2,-Rujam
```

```
554.roms_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xppagesize=256M
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus
-xthroughput=no -xprefetch_auto_type=indirect_array_access
-xunroll=3 -W2,-Rujam -Wc,-Qiselect-rcpa=2
-Wc,-Qiselect-rsqrtfa=2 -Wc,-Qiselect-rsqrtalx=2
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2
-xppagesize=256M -xsegment_align=256M -xthroughput
-xtarget=sparc64xplus
```

```
527.cam4_r: basepeak = yes
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu Fujitsu SPARC M12-2	SPECrate2017_fp_base = 159 SPECrate2017_fp_peak = 191
--------------------------------	--

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
511.povray_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast(CC) -fast(cc) -xtarget=sparc64xii -xipo=2
-xpagesize=256M -xsegment_align=256M -xthroughput
-xtarget=sparc64xplus -xipo=1 -xalias_level=std
-xthroughput=no -xinline_param=level:3
-Wc,-Qiselect-rcpa=2 -W2,-Afully_unroll:always=on
-xalias_level=compatible -features=no%except
-features=no%rtti -Qoption iropt -Afully_unroll:always=on
-library=stlport4 -lfast
```

```
526.blender_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast(CC) -fast(cc) -xtarget=sparc64xii -xipo=2
-xpagesize=256M -xsegment_align=256M -xthroughput
-library=stlport4
```

Benchmarks using Fortran, C, and C++:

```
-xprofile=collect:./feedback -xprofile=use:./feedback -m32 -fast(CC)
-fast(cc) -fast(f95) -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -m64 -Wc,-Qiselect-funcalign=4
-Qoption cg -Qiselect-funcalign=4 -library=stlport4
```

Peak Other Flags

C benchmarks:

```
-xjobs=8
```

C++ benchmarks:

```
-xjobs=8
```

Fortran benchmarks:

```
-xjobs=8
```

Benchmarks using both Fortran and C:

```
-xjobs=8
```

Benchmarks using both C and C++:

```
-xjobs=8
```

Benchmarks using Fortran, C, and C++:

```
-xjobs=8
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 191

CPU2017 License: 19

Test Date: Nov-2017

Test Sponsor: Fujitsu

Hardware Availability: Apr-2017

Tested by: Fujitsu

Software Availability: Jul-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-30 02:17:40-0500.

Report generated on 2018-10-31 13:41:20 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.