



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

CPU2017 License: 9046


Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

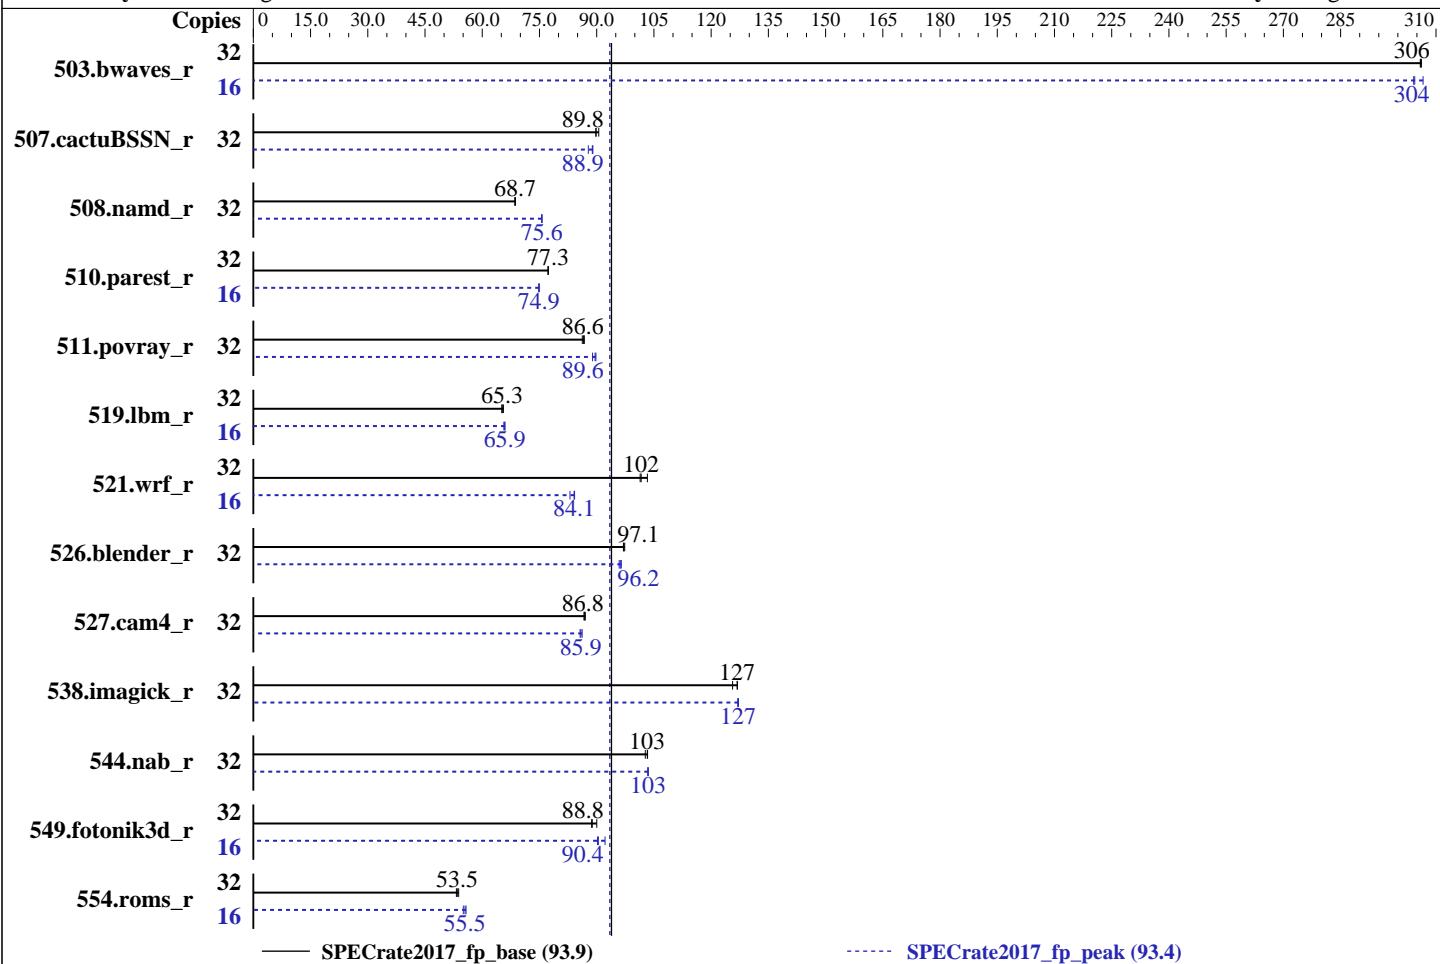

— SPECrate2017\_fp\_base (93.9)

----- SPECrate2017\_fp\_peak (93.4)

## Hardware

CPU Name: AMD EPYC 7351P  
 Max MHz.: 2900  
 Nominal: 2400  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4Rx4 PC4-2667V-L)  
 Storage: 1 x 2000 GB SATA, 7200 RPM  
 Other: None

## Software

OS: Red Hat Enterprise Linux Server 7.4  
 kernel 3.10.0-693.2.2  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: American Megatrends Inc. BIOS Version 1QLSH015 released Oct-2017  
 File System: xfs  
 System State: Run level 3 (Multi User)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Aug-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	1049	306	1048	306	<b>1049</b>	<b>306</b>	16	<b>527</b>	<b>304</b>	528	304	523	307
507.cactuBSSN_r	32	<b>451</b>	<b>89.8</b>	447	90.5	451	89.8	32	<b>456</b>	<b>88.9</b>	461	87.8	455	89.0
508.namd_r	32	444	68.5	<b>443</b>	<b>68.7</b>	443	68.7	32	<b>402</b>	<b>75.6</b>	402	75.7	402	75.6
510.parest_r	32	<b>1083</b>	<b>77.3</b>	1084	77.3	1083	77.3	16	<b>559</b>	<b>74.9</b>	559	74.9	559	74.8
511.povray_r	32	<b>863</b>	<b>86.6</b>	861	86.8	867	86.2	32	<b>834</b>	<b>89.6</b>	840	88.9	832	89.8
519.lbm_r	32	518	65.1	515	65.6	<b>517</b>	<b>65.3</b>	16	<b>256</b>	<b>65.9</b>	257	65.7	256	66.0
521.wrf_r	32	694	103	707	101	<b>705</b>	<b>102</b>	16	426	84.2	432	83.0	<b>426</b>	<b>84.1</b>
526.blender_r	32	502	97.0	<b>502</b>	<b>97.1</b>	501	97.3	32	<b>507</b>	<b>96.2</b>	505	96.5	508	95.9
527.cam4_r	32	646	86.7	643	87.0	<b>645</b>	<b>86.8</b>	32	<b>652</b>	<b>85.9</b>	649	86.2	<b>653</b>	85.7
538.imagick_r	32	627	127	634	126	<b>628</b>	<b>127</b>	32	<b>626</b>	<b>127</b>	626	127	<b>627</b>	127
544.nab_r	32	521	103	524	103	<b>522</b>	<b>103</b>	32	521	103	<b>521</b>	<b>103</b>	520	104
549.fotonik3d_r	32	<b>1404</b>	<b>88.8</b>	1385	90.0	1406	88.7	16	691	90.2	676	92.2	<b>689</b>	<b>90.4</b>
554.roms_r	32	955	53.2	<b>951</b>	<b>53.5</b>	945	53.8	16	<b>458</b>	<b>55.5</b>	456	55.8	462	55.0

**SPECrate2017\_fp\_base = 93.9**

**SPECrate2017\_fp\_peak = 93.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory

sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:  
MALLOC_CONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at

<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at

<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>  
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing  
of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers  
with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

## Platform Notes

BIOS settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost Fri Dec 8 09:25:41 2017
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7351P 16-Core Processor

1 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 32

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Platform Notes (Continued)

physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:

```

Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):              1
NUMA node(s):           4
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                 1
Model name:             AMD EPYC 7351P 16-Core Processor
Stepping:               2
CPU MHz:                2400.000
CPU max MHz:            2400.0000
CPU min MHz:            1200.0000
BogoMIPS:               4790.25
Virtualization:         AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:                512K
L3 cache:                8192K
NUMA node0 CPU(s):      0-3,16-19
NUMA node1 CPU(s):      4-7,20-23
NUMA node2 CPU(s):      8-11,24-27
NUMA node3 CPU(s):      12-15,28-31
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc art rep_good nopl nonstop_tsc extd_apicid aperfmpfperf eagerfpu dni
                        pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
                        rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
                        hw_pstate avic fsgsbbase bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni
                        xsaveopt xsavec xgetbv1 arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                        flushbyasid decodeassists pausefilter pfthreshold overflow_recov succor smca

```

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 16 17 18 19

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Platform Notes (Continued)

```
node 0 size: 129061 MB
node 0 free: 126190 MB
node 1 cpus: 4 5 6 7 20 21 22 23
node 1 size: 131071 MB
node 1 free: 128192 MB
node 2 cpus: 8 9 10 11 24 25 26 27
node 2 size: 131071 MB
node 2 free: 128175 MB
node 3 cpus: 12 13 14 15 28 29 30 31
node 3 size: 131071 MB
node 3 free: 128150 MB
node distances:
node   0   1   2   3
  0: 10  16  16  16
  1: 16  10  16  16
  2: 16  16  10  16
  3: 16  16  16  10
```

```
From /proc/meminfo
MemTotal:      526417980 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux localhost 3.10.0-693.2.2.el7.x86_64 #1 SMP Mon Sep 25 08:21:56 EDT 2017 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 1 08:05
```

```
SPEC is set to: /home/cpu2017
Filesystem          Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   1.7T   41G  1.7T   3% /home
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1QLSH015 10/19/2017

Memory:

8x Micron Technology 72ASS8G72LZ-2G6B2 64 GB 4 rank 2666

8x Unknown Unknown

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
-----

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Compiler Version Notes (Continued)

```
=====
FC 507.cactubSSN_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
-----

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
peak)
-----
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
-----

=====
CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

---

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Base Optimization Flags

C benchmarks:

```
-futto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math  
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100  
-fremap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-futto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3  
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive  
-fremap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-futto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)  
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="--merge-constant -disable-vect-cmp"  
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-futto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)  
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm  
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000  
-O3(gfortran) -mavx -madx -funroll-loops -z muldefs  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="--merge-constant -disable-vect-cmp"  
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-futto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math  
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100  
-fremap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive  
-z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-futto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)  
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm  
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000  
-finline-aggressive -O3(gfortran) -mavx -madx -funroll-loops  
-z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="--merge-constant -disable-vect-cmp"  
-ljemalloc
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-fsto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc
```

C++ benchmarks:

```
-fsto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-fsto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
521.wrf_r: -futo -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(clang) -mavx  
-ffast-math -O3(gfortran) -funroll-loops  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -futo -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -ml1vm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-futo -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -ml1vm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-futo -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -ml1vm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.html>  
<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.xml>  
<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.xml>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Sugon**

**SPECCrate2017\_fp\_base = 93.9**

**Sugon A320-G30 (AMD EPYC 7351P)**

**SPECCrate2017\_fp\_peak = 93.4**

**CPU2017 License:** 9046

**Test Date:** Dec-2017

**Test Sponsor:** Sugon

**Hardware Availability:** Dec-2017

**Tested by:** Sugon

**Software Availability:** Aug-2017

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-07 20:25:41-0500.

Report generated on 2019-02-20 21:10:08 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.