



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon


SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

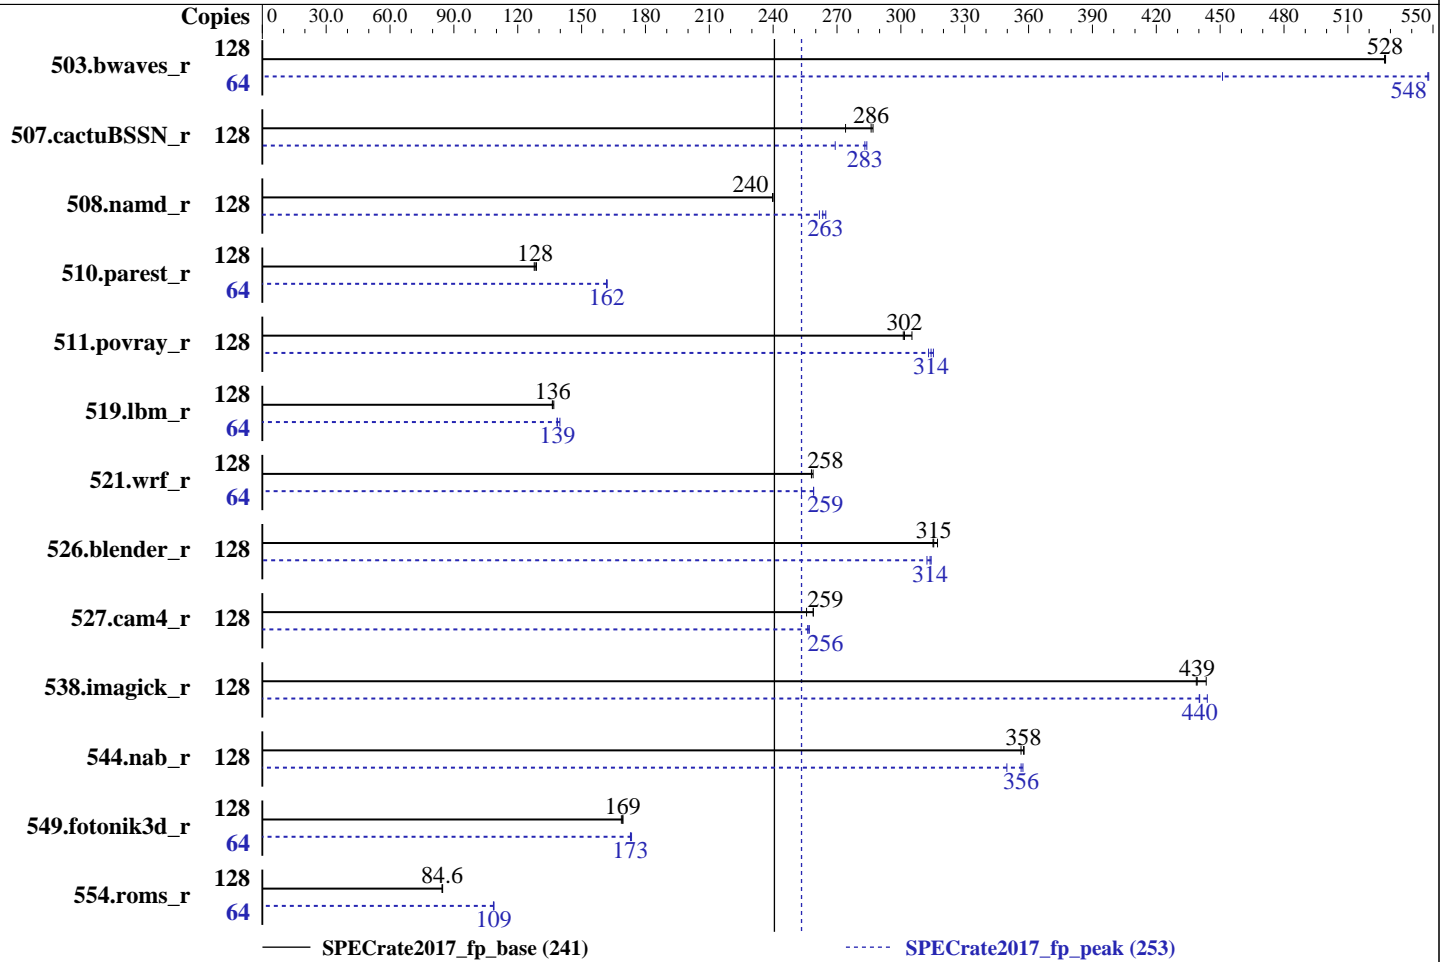

Hardware

CPU Name: AMD EPYC 7551
 Max MHz.: 3000
 Nominal: 2000
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 8 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2S2Rx4 PC4-2667V-R, running at 2400)
 Storage: 1 x 2000 GB SATA, 7200 RPM
 Other: None

Software

OS: Red Hat Enterprise Linux Server 7.4
 kernel 3.10.0-693.2.2
 Compiler: C/C++: Version 1.0.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: No
 Firmware: American Megatrends Inc. BIOS Version 0WYSZ016 released Jul-2017
 File System: ext4
 System State: Run level 3 (Multi User)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	2435	527	<u>2433</u>	<u>528</u>	2432	528	64	1171	548	<u>1172</u>	<u>548</u>	1423	451
507.cactuBSSN_r	128	565	287	591	274	<u>567</u>	<u>286</u>	128	571	284	602	269	<u>572</u>	<u>283</u>
508.namd_r	128	507	240	<u>507</u>	<u>240</u>	507	240	128	<u>462</u>	<u>263</u>	459	265	465	262
510.parest_r	128	2621	128	<u>2612</u>	<u>128</u>	2600	129	64	1034	162	1035	162	<u>1035</u>	<u>162</u>
511.povray_r	128	<u>991</u>	<u>302</u>	979	305	993	301	128	948	315	<u>951</u>	<u>314</u>	955	313
519.lbm_r	128	<u>989</u>	<u>136</u>	985	137	990	136	64	483	140	487	138	<u>487</u>	<u>139</u>
521.wrf_r	128	1111	258	<u>1111</u>	<u>258</u>	1108	259	64	<u>554</u>	<u>259</u>	566	253	553	259
526.blender_r	128	615	317	619	315	<u>618</u>	<u>315</u>	128	<u>621</u>	<u>314</u>	620	314	624	312
527.cam4_r	128	865	259	876	256	<u>865</u>	<u>259</u>	128	874	256	<u>873</u>	<u>256</u>	871	257
538.imagick_r	128	725	439	<u>725</u>	<u>439</u>	718	443	128	717	444	<u>723</u>	<u>440</u>	723	440
544.nab_r	128	604	356	602	358	<u>602</u>	<u>358</u>	128	<u>604</u>	<u>356</u>	616	350	603	357
549.fotonik3d_r	128	<u>2946</u>	<u>169</u>	2944	169	2957	169	64	<u>1442</u>	<u>173</u>	1438	173	1442	173
554.roms_r	128	<u>2405</u>	<u>84.6</u>	2401	84.7	2408	84.5	64	937	109	935	109	<u>935</u>	<u>109</u>

SPECrate2017_fp_base = 241

SPECrate2017_fp_peak = 253

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"  
MALLOC_CONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/tools-and-sdks/cpu-development/amd-optimizing-cc-compiler/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.
jemalloc uses environment variable MALLOC_CONF with values narenas and lg_chunk:
narenas: sets the maximum number of arenas to use for automatic multiplexing
of threads and arenas.
lg_chunk: set the virtual memory chunk size (log base 2). For example,
lg_chunk:21 sets the default chunk size to 2²¹ = 2MiB.

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers
with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

Platform Notes

BIOS settings:

```
Determinism Slider = Power  
cTDP Control = Manual  
cTDP = 200
```

This system Sugon A420-G30 is electrically equal with Sugon A620-G30 populated with the same processors and memories.
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on localhost Fri Dec 1 13:41:12 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7551 32-Core Processor  
2 "physical id"s (chips)  
128 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 32
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Platform Notes (Continued)

```
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 23
Model: 1
Model name: AMD EPYC 7551 32-Core Processor
Stepping: 2
CPU MHz: 2000.000
CPU max MHz: 2000.0000
CPU min MHz: 1200.0000
BogoMIPS: 3991.94
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 64K
L2 cache: 512K
L3 cache: 8192K
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc art rep_good nopl nonstop_tsc extd_apicid aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb
hw_pstate avic fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni
xsaveopt xsavec xgetbv1 arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbiasid decodeassists pausefilter pfthreshold overflow_recov succor smca
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 130977 MB
node 0 free: 128057 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 131071 MB
node 1 free: 128216 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 131071 MB
node 2 free: 128234 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 131071 MB
node 3 free: 128237 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 131071 MB
node 4 free: 128169 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 131071 MB
node 5 free: 128194 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 131071 MB
node 6 free: 128188 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 131071 MB
node 7 free: 128090 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
0:  10 16 16 16 32 32 32 32
1:  16 10 16 16 32 32 32 32
2:  16 16 10 16 32 32 32 32
3:  16 16 16 10 32 32 32 32
4:  32 32 32 32 10 16 16 16
5:  32 32 32 32 16 10 16 16
6:  32 32 32 32 16 16 10 16
7:  32 32 32 32 16 16 16 10
```

```
From /proc/meminfo
MemTotal: 1056764124 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Platform Notes (Continued)

```

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.4 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VARIANT="Server"
  VARIANT_ID="server"
  VERSION_ID="7.4"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux localhost 3.10.0-693.2.2.el7.x86_64 #1 SMP Mon Sep 25 08:21:56 EDT 2017 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Dec 1 11:59

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home ext4   296G  118G  164G  42% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS American Megatrends Inc. 0WYSZ016 07/21/2017
Memory:
  16x Samsung M393A8K40B22-CWD 32 GB 2 rank 2666, configured at 2400
  16x Unknown Unknown

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
CC      519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
=====

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Compiler Version Notes (Continued)

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
=====

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
=====

=====
FC 507.cactuBSSN_r(base, peak)
=====

AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
=====

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Compiler Version Notes (Continued)

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
=====

=====
CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin
=====

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
clang gfortran

Benchmarks using both Fortran and C:
clang gfortran

Benchmarks using both C and C++:
clang++ clang

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-freemap-arrays -mno-avx2 -inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3
-march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive
-freemap-arrays -inline-threshold=1000 -z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(gfortran)
-O3(clang) -mavx -madox -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc -lgfortran -lamdlibm
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046
Test Sponsor: Sugon
Tested by: Sugon

Test Date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Aug-2017

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000
-O3(gfortran) -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3 -ffast-math
-march=znver1 -fstruct-layout=2 -mllvm -unroll-threshold=100
-fremap-arrays -mno-avx2 -inline-threshold=1000 -finline-aggressive
-z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt= -merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -disable-vect-cmp -O3(clang)
-ffast-math -march=znver1 -fstruct-layout=2 -mllvm
-unroll-threshold=100 -fremap-arrays -mno-avx2 -inline-threshold=1000
-finline-aggressive -O3(gfortran) -mavx -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="-merge-constant -disable-vect-cmp"
-ljemalloc
```

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000 -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran) -O3(clang) -mavx2  
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(clang) -mavx  
-ffast-math -O3(gfortran) -funroll-loops  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl,-plugin-opt= -merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Sugon

SPECrate2017_fp_base = 241

Sugon A420-G30 (AMD EPYC 7551)

SPECrate2017_fp_peak = 253

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Aug-2017

Peak Optimization Flags (Continued)

527.cam4_r (continued):

```
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option="-merge-constant  
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/aoccl100-flags-revC-I.html>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/aoccl100-flags-revC-I.xml>

<http://www.spec.org/cpu2017/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-01 00:41:10-0500.

Report generated on 2019-02-20 21:10:09 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.