



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

**SPECrate2017\_fp\_base = 331**

**SPECrate2017\_fp\_peak = 336**

CPU2017 License: 9017


**Test Date:** Nov-2017

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Sep-2017

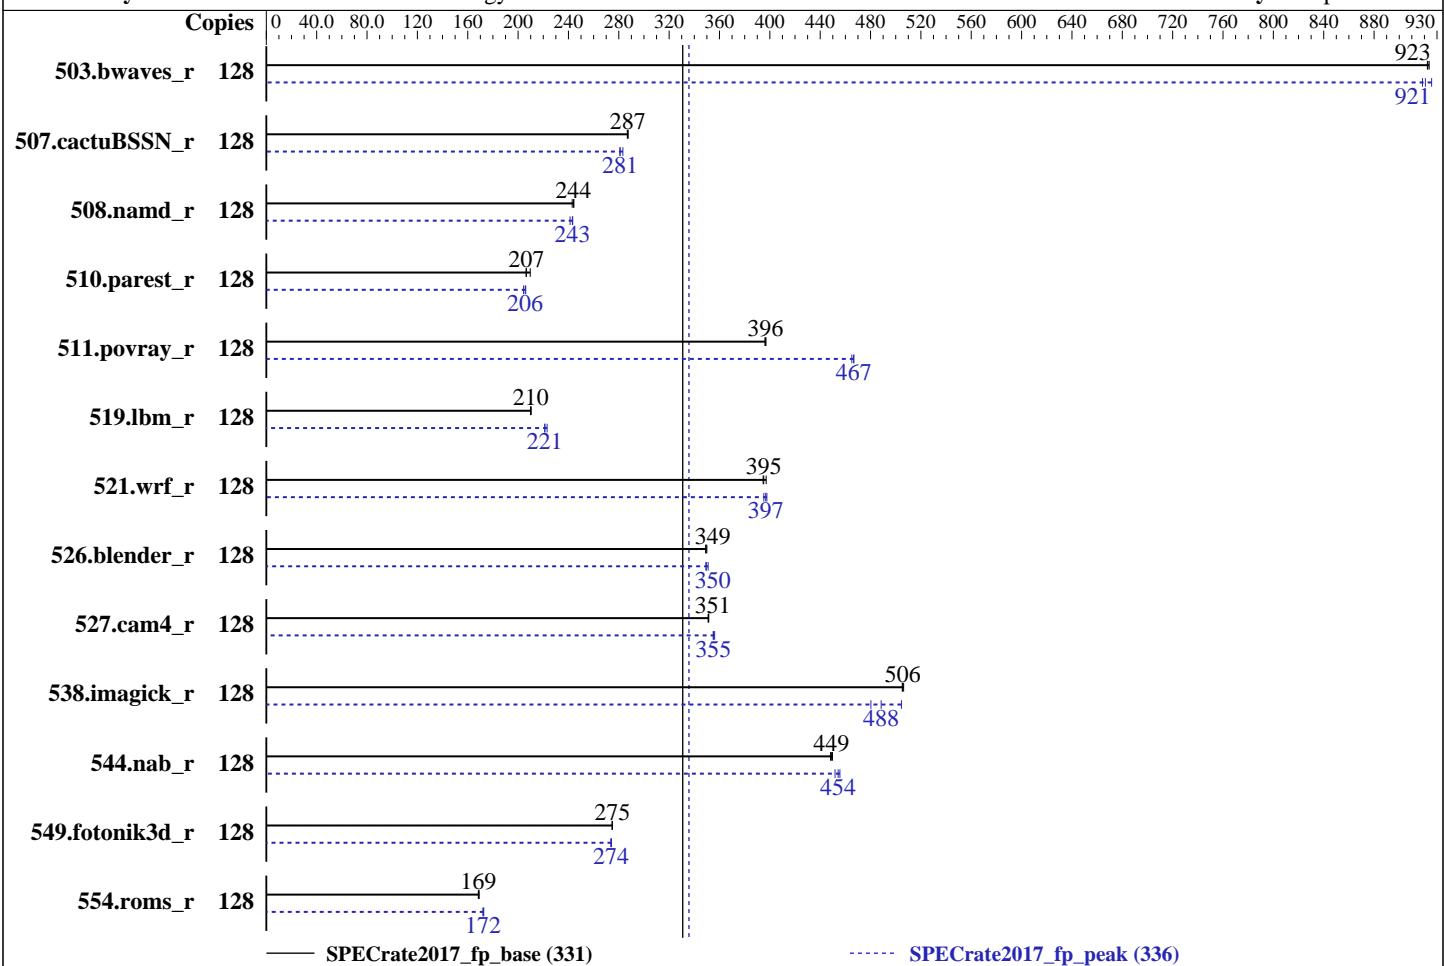

— SPECrate2017\_fp\_base (331)

----- SPECrate2017\_fp\_peak (336)

### Hardware

CPU Name: Intel Xeon Gold 6130T  
Max MHz.: 3700  
Nominal: 2100  
Enabled: 64 cores, 4 chips, 2 threads/core  
Orderable: 2,4 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
Storage: 1 x 800 GB SAS SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Kernel 4.4.21-69-default

### Compiler:

C/C++: Version 18.0.0.128 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran  
Compiler for Linux

### Parallel:

No  
Firmware: Lenovo BIOS Version TEE113J 1.00 released Jun-2017

### Firmware:

File System: xfs

### File System:

System State: Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

64-bit

### Other:

None

### Software

SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Kernel 4.4.21-69-default



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

**SPECrate2017\_fp\_base = 331**

**SPECrate2017\_fp\_peak = 336**

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	1390	924	<b>1391</b>	<b>923</b>	1392	922	128	1387	926	1398	918	<b>1394</b>	<b>921</b>		
507.cactusBSSN_r	128	<b>564</b>	<b>287</b>	565	287	564	287	128	<b>572</b>	283	577	281	<b>577</b>	<b>281</b>		
508.namd_r	128	500	243	<b>498</b>	<b>244</b>	498	244	128	<b>504</b>	241	<b>500</b>	<b>243</b>	500	243		
510.parest_r	128	1597	210	1623	206	<b>1620</b>	<b>207</b>	128	1625	206	1639	204	<b>1628</b>	<b>206</b>		
511.povray_r	128	<b>754</b>	<b>396</b>	754	396	753	397	128	643	465	<b>641</b>	<b>467</b>	640	467		
519.lbm_r	128	<b>642</b>	<b>210</b>	643	210	641	210	128	<b>605</b>	223	<b>610</b>	<b>221</b>	610	221		
521.wrf_r	128	722	397	<b>726</b>	<b>395</b>	726	395	128	725	395	721	398	<b>723</b>	<b>397</b>		
526.blender_r	128	557	350	559	349	<b>558</b>	<b>349</b>	128	<b>555</b>	351	<b>558</b>	<b>350</b>	558	349		
527.cam4_r	128	<b>637</b>	<b>351</b>	637	351	638	351	128	629	356	<b>630</b>	<b>355</b>	631	355		
538.imagick_r	128	<b>630</b>	<b>506</b>	630	505	629	506	128	631	505	<b>652</b>	<b>488</b>	663	480		
544.nab_r	128	481	448	<b>480</b>	<b>449</b>	479	450	128	473	456	477	452	<b>474</b>	<b>454</b>		
549.fotonik3d_r	128	1816	275	1814	275	<b>1815</b>	<b>275</b>	128	1819	274	<b>1821</b>	<b>274</b>	1822	274		
554.roms_r	128	1203	169	1208	168	<b>1207</b>	<b>169</b>	128	<b>1181</b>	<b>172</b>	1181	172	1178	173		

**SPECrate2017\_fp\_base = 331**

**SPECrate2017\_fp\_peak = 336**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"

LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITORMWAIT set to Enable

Execute Disable Bit set to Disable

Intel Virtualization Technology set to Disable

DCA set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on Electron-node-02 Tue Nov 28 18:09:18 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6130T CPU @ 2.10GHz
        4 "physical id"s (chips)
        128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               128
On-line CPU(s) list: 0-127
Thread(s) per core:  2
Core(s) per socket:  16
Socket(s):            4
NUMA node(s):         8
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6130T CPU @ 2.10GHz
Stepping:              4
CPU MHz:              2095.077
BogoMIPS:              4190.15
Virtualization:       VT-x
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

**SPECrate2017\_fp\_base = 331**

**SPECrate2017\_fp\_peak = 336**

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

```
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-3,8-11,64-67,72-75
NUMA node1 CPU(s): 4-7,12-15,68-71,76-79
NUMA node2 CPU(s): 16-19,24-27,80-83,88-91
NUMA node3 CPU(s): 20-23,28-31,84-87,92-95
NUMA node4 CPU(s): 32-35,40-43,96-99,104-107
NUMA node5 CPU(s): 36-39,44-47,100-103,108-111
NUMA node6 CPU(s): 48-51,56-59,112-115,120-123
NUMA node7 CPU(s): 52-55,60-63,116-119,124-127
Flags: fpu vme de pse tsc msr pae mce sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 8 9 10 11 64 65 66 67 72 73 74 75
node 0 size: 193131 MB
node 0 free: 192542 MB
node 1 cpus: 4 5 6 7 12 13 14 15 68 69 70 71 76 77 78 79
node 1 size: 193528 MB
node 1 free: 192819 MB
node 2 cpus: 16 17 18 19 24 25 26 27 80 81 82 83 88 89 90 91
node 2 size: 193528 MB
node 2 free: 193020 MB
node 3 cpus: 20 21 22 23 28 29 30 31 84 85 86 87 92 93 94 95
node 3 size: 193528 MB
node 3 free: 192966 MB
node 4 cpus: 32 33 34 35 40 41 42 43 96 97 98 99 104 105 106 107
node 4 size: 193528 MB
node 4 free: 193049 MB
node 5 cpus: 36 37 38 39 44 45 46 47 100 101 102 103 108 109 110 111
node 5 size: 193528 MB
node 5 free: 193050 MB
node 6 cpus: 48 49 50 51 56 57 58 59 112 113 114 115 120 121 122 123
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 6 size: 193528 MB
node 6 free: 193038 MB
node 7 cpus: 52 53 54 55 60 61 62 63 116 117 118 119 124 125 126 127
node 7 size: 193525 MB
node 7 free: 192993 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 21 21 21 21 31 31
  1: 11 10 21 21 21 21 31 31
  2: 21 21 10 11 31 31 21 21
  3: 21 21 11 10 31 31 21 21
  4: 21 21 31 31 10 11 21 21
  5: 21 21 31 31 11 10 21 21
  6: 31 31 21 21 21 21 10 11
  7: 31 31 21 21 21 21 11 10

From /proc/meminfo
MemTotal:      1584975560 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux Electron-node-02 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 28 17:40

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   688G  130G  559G  19%  /home
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE113J-1.00]- 06/03/2017

Memory:

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base, peak) 544.nab\_r(base)

=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 519.lbm\_r(peak) 544.nab\_r(peak)

=====

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CXXC 508.namd\_r(peak) 510.parest\_r(peak)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(peak) 526.blender\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

fort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc fort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Portability Flags (Continued)

```
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Other Flags (Continued)

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR850  
(2.10 GHz, Intel Xeon Gold 6130T)

SPECrate2017\_fp\_base = 331

SPECrate2017\_fp\_peak = 336

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-28 05:09:17-0500.

Report generated on 2018-10-31 14:14:03 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.