



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55


Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

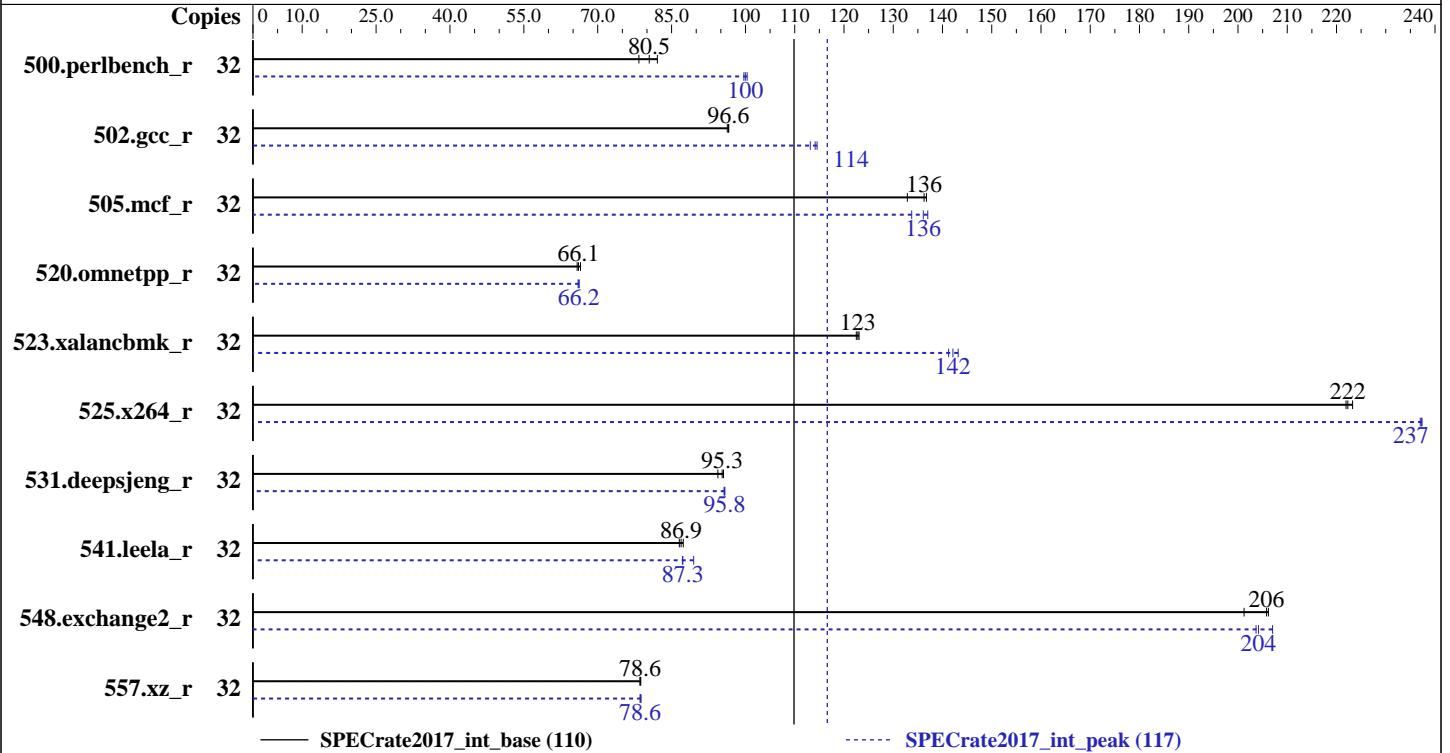

### Hardware

CPU Name: Intel Xeon Gold 5122  
 Max MHz.: 3700  
 Nominal: 3600  
 Enabled: 16 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
 4.4.114-94.11-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.0 released Mar-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator library, version 5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Feb-2018

## Results Table

| Benchmark       | Base   |            |             |            |             |            |             | Peak   |            |             |            |             |            |             |
|-----------------|--------|------------|-------------|------------|-------------|------------|-------------|--------|------------|-------------|------------|-------------|------------|-------------|
|                 | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 500.perlbench_r | 32     | 650        | 78.4        | 620        | 82.1        | <b>633</b> | <b>80.5</b> | 32     | 508        | 100         | 511        | 99.7        | <b>510</b> | <b>100</b>  |
| 502.gcc_r       | 32     | 470        | 96.3        | <b>469</b> | <b>96.6</b> | 469        | 96.6        | 32     | 400        | 113         | <b>397</b> | <b>114</b>  | 396        | 115         |
| 505.mcf_r       | 32     | 378        | 137         | <b>379</b> | <b>136</b>  | 389        | 133         | 32     | 377        | 137         | 387        | 134         | <b>380</b> | <b>136</b>  |
| 520.omnetpp_r   | 32     | 638        | 65.8        | 631        | 66.5        | <b>635</b> | <b>66.1</b> | 32     | 636        | 66.0        | 634        | 66.2        | <b>634</b> | <b>66.2</b> |
| 523.xalancbmk_r | 32     | <b>275</b> | <b>123</b>  | 275        | 123         | 276        | 123         | 32     | 239        | 141         | <b>238</b> | <b>142</b>  | 236        | 143         |
| 525.x264_r      | 32     | 252        | 222         | 251        | 223         | <b>252</b> | <b>222</b>  | 32     | 236        | 237         | <b>236</b> | <b>237</b>  | 236        | 237         |
| 531.deepsjeng_r | 32     | 388        | 94.4        | 384        | 95.5        | <b>385</b> | <b>95.3</b> | 32     | 383        | 95.6        | 383        | 95.8        | <b>383</b> | <b>95.8</b> |
| 541.leela_r     | 32     | 612        | 86.6        | 607        | 87.4        | <b>610</b> | <b>86.9</b> | 32     | 608        | 87.2        | <b>607</b> | <b>87.3</b> | 592        | 89.5        |
| 548.exchange2_r | 32     | 417        | 201         | <b>407</b> | <b>206</b>  | 407        | 206         | 32     | 412        | 204         | <b>411</b> | <b>204</b>  | 405        | 207         |
| 557.xz_r        | 32     | <b>440</b> | <b>78.6</b> | 440        | 78.6        | 439        | 78.7        | 32     | <b>439</b> | <b>78.6</b> | 440        | 78.6        | 439        | 78.8        |

SPECrate2017\_int\_base = 110

SPECrate2017\_int\_peak = 117

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available via jemalloc.net

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Dell PowerEdge R840 and PowerEdge R940xa are electronically equivalent.  
This result was measured on Dell PowerEdge R840.

## Platform Notes

BIOS settings:  
 Sub NUMA Cluster enabled  
 Virtualization Technology disabled  
 System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to Autonomous  
 ClE disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance  
 Memory Patrol Scrub disabled  
 Logical Processor enabled  
 CPU Interconnect Bus Link Power Management disabled  
 PCI ASPM L1 Link Power Management disabled  
 Sysinfo program /root/cpu2017/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on linux-fitm Tue Apr 17 02:57:53 2018

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
 4 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 5 9 13
physical 1: cores 1 5 9 13
physical 2: cores 0 5 9 13
physical 3: cores 3 4 6 7
```

```
From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

## Platform Notes (Continued)

```

CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 4
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 5122 CPU @ 3.60GHz
Stepping: 4
CPU MHz: 3591.561
BogoMIPS: 7183.12
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 16896K
NUMA node0 CPU(s): 0,8,16,24
NUMA node1 CPU(s): 1,9,17,25
NUMA node2 CPU(s): 2,10,18,26
NUMA node3 CPU(s): 3,11,19,27
NUMA node4 CPU(s): 4,12,20,28
NUMA node5 CPU(s): 5,13,21,29
NUMA node6 CPU(s): 6,14,22,30
NUMA node7 CPU(s): 7,15,23,31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 16896 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24
node 0 size: 95362 MB
node 0 free: 95226 MB
node 1 cpus: 1 9 17 25

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

## Platform Notes (Continued)

```

node 1 size: 96763 MB
node 1 free: 96633 MB
node 2 cpus: 2 10 18 26
node 2 size: 96763 MB
node 2 free: 96657 MB
node 3 cpus: 3 11 19 27
node 3 size: 96763 MB
node 3 free: 96644 MB
node 4 cpus: 4 12 20 28
node 4 size: 96763 MB
node 4 free: 96651 MB
node 5 cpus: 5 13 21 29
node 5 size: 96763 MB
node 5 free: 96654 MB
node 6 cpus: 6 14 22 30
node 6 size: 96763 MB
node 6 free: 96643 MB
node 7 cpus: 7 15 23 31
node 7 size: 96761 MB
node 7 free: 96643 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10  21  31  21  11  21  31  21
 1:  21  10  21  31  21  11  21  31
 2:  31  21  10  21  31  21  11  21
 3:  21  31  21  10  21  31  21  11
 4:  11  21  31  21  10  21  31  21
 5:  21  11  21  31  21  10  21  31
 6:  31  21  11  21  31  21  10  21
 7:  21  31  21  11  21  31  21  10

```

From /proc/meminfo

MemTotal: 791250288 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP3

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

## Platform Notes (Continued)

```

NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux linux-fitm 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 17 02:45

SPEC is set to: /root/cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   394G   70G  324G  18% /

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 03/20/2018

Memory:

```

2x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666
5x 002C0632002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666
13x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
23x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
5x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

```

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----

```

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

```

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----

```

icc (ICC) 18.0.0 20170811

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 520.omnetpp\_r(peak) 523.xalancbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 548.exchange2\_r(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

## Base Portability Flags (Continued)

```
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc

502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc

525.x264_r: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz_r: Same as 505.mcf_r

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk\_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_int\_base = 110

PowerEdge R840 (Intel Xeon Gold 5122, 3.60 GHz)

SPECrate2017\_int\_peak = 117

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-16 14:57:53-0400.

Report generated on 2019-02-20 14:56:46 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.