



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55


Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Sep-2017

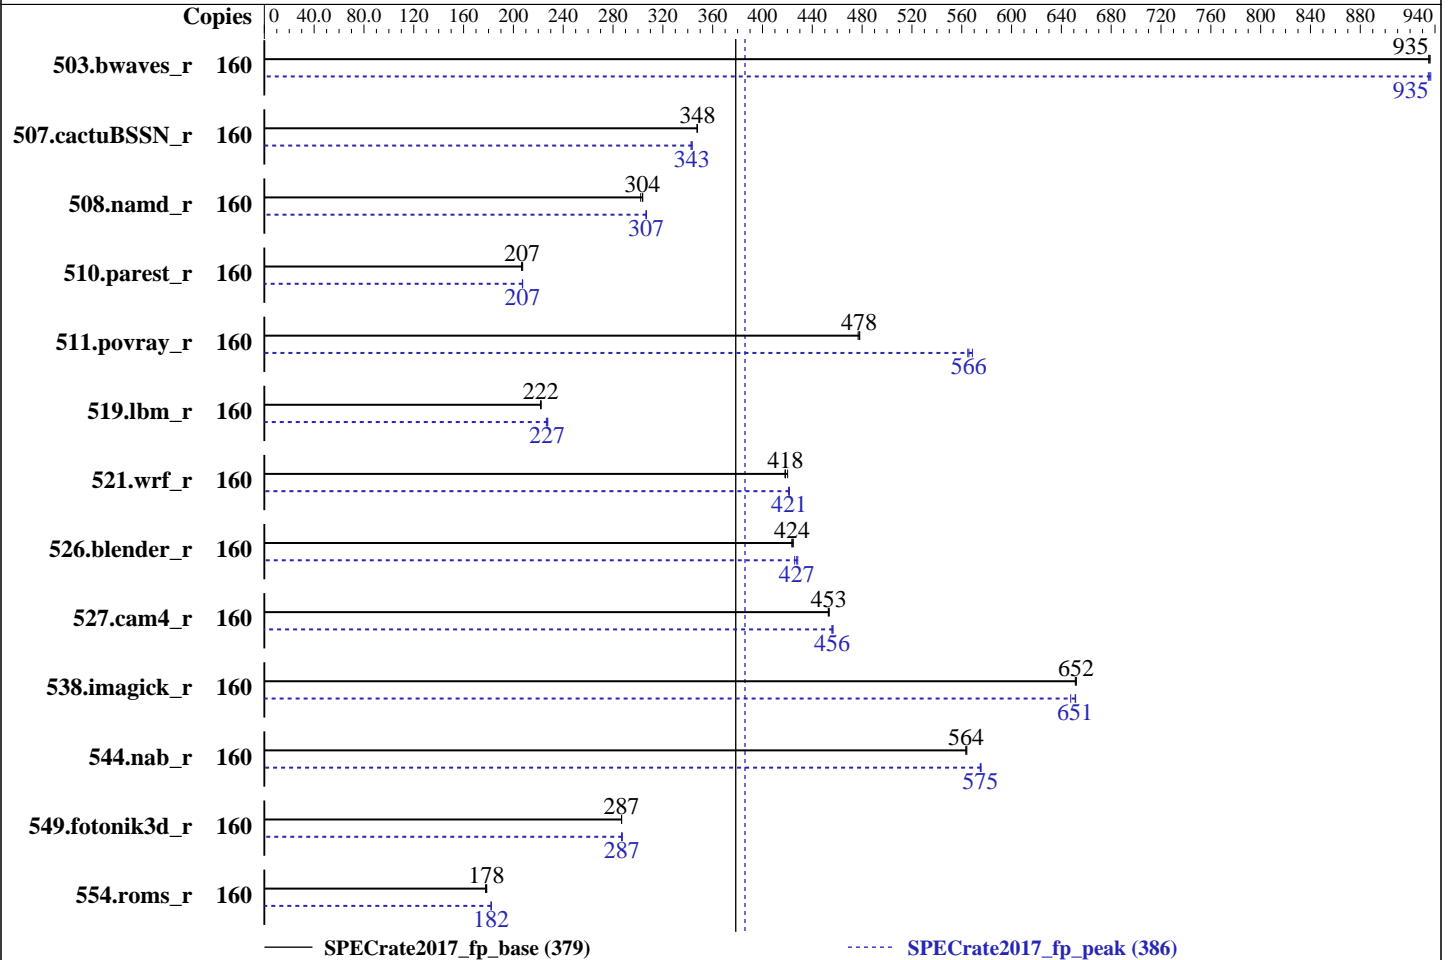

### Hardware

CPU Name: Intel Xeon Gold 6148  
 Max MHz.: 3700  
 Nominal: 2400  
 Enabled: 80 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
 4.4.114-94.11-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.0 released Mar-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	1714	936	1716	935	<b>1715</b>	<b>935</b>	160	1717	935	<b>1715</b>	<b>935</b>	1713	937
507.cactuBSSN_r	160	<b>582</b>	<b>348</b>	583	347	582	348	160	590	344	591	343	<b>590</b>	<b>343</b>
508.namd_r	160	<b>501</b>	<b>304</b>	500	304	503	302	160	495	307	496	306	<b>496</b>	<b>307</b>
510.parest_r	160	2018	207	2027	207	<b>2022</b>	<b>207</b>	160	2018	207	2020	207	<b>2019</b>	<b>207</b>
511.povray_r	160	781	478	<b>782</b>	<b>478</b>	784	477	160	<b>660</b>	<b>566</b>	661	565	657	569
519.lbm_r	160	<b>760</b>	<b>222</b>	760	222	759	222	160	741	228	745	226	<b>742</b>	<b>227</b>
521.wrf_r	160	857	418	<b>857</b>	<b>418</b>	853	420	160	850	422	<b>851</b>	<b>421</b>	851	421
526.blender_r	160	574	425	575	424	<b>575</b>	<b>424</b>	160	569	428	572	426	<b>570</b>	<b>427</b>
527.cam4_r	160	617	454	<b>617</b>	<b>453</b>	618	453	160	613	457	614	456	<b>614</b>	<b>456</b>
538.imagick_r	160	<b>610</b>	<b>652</b>	611	651	610	652	160	611	651	<b>611</b>	<b>651</b>	615	647
544.nab_r	160	478	563	<b>478</b>	<b>564</b>	477	564	160	<b>468</b>	<b>575</b>	468	575	468	576
549.fotonik3d_r	160	<b>2174</b>	<b>287</b>	2174	287	2174	287	160	2169	287	<b>2172</b>	<b>287</b>	2173	287
554.roms_r	160	1423	179	1431	178	<b>1426</b>	<b>178</b>	160	1395	182	<b>1396</b>	<b>182</b>	1396	182

SPECrate2017\_fp\_base = 379

SPECrate2017\_fp\_peak = 386

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## General Notes (Continued)

Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
ClE disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /root/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-jfwh Mon Apr 23 23:31:20 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz  
4 "physical id"s (chips)  
160 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 20  
siblings : 40  
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Platform Notes (Continued)

```

CPU(s): 160
On-line CPU(s) list: 0-159
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6148 CPU @ 2.40GHz
Stepping: 4
CPU MHz: 2394.381
BogoMIPS: 4788.76
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s):
0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 96, 104, 112, 120, 128, 136, 144, 152
NUMA node1 CPU(s):
1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 97, 105, 113, 121, 129, 137, 145, 153
NUMA node2 CPU(s):
2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 98, 106, 114, 122, 130, 138, 146, 154
NUMA node3 CPU(s):
3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 99, 107, 115, 123, 131, 139, 147, 155
NUMA node4 CPU(s):
4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 100, 108, 116, 124, 132, 140, 148, 156
NUMA node5 CPU(s):
5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 101, 109, 117, 125, 133, 141, 149, 157
NUMA node6 CPU(s):
6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 102, 110, 118, 126, 134, 142, 150, 158
NUMA node7 CPU(s):
7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 103, 111, 119, 127, 135, 143, 151, 159
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512v1 xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

/proc/cpuinfo cache data  
cache size : 28160 KB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Platform Notes (Continued)

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56 64 72 80 88 96 104 112 120 128 136 144 152
node 0 size: 95360 MB
node 0 free: 95041 MB
node 1 cpus: 1 9 17 25 33 41 49 57 65 73 81 89 97 105 113 121 129 137 145 153
node 1 size: 96761 MB
node 1 free: 96542 MB
node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154
node 2 size: 96761 MB
node 2 free: 96551 MB
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155
node 3 size: 96761 MB
node 3 free: 96532 MB
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156
node 4 size: 96761 MB
node 4 free: 96546 MB
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157
node 5 size: 96761 MB
node 5 free: 96561 MB
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158
node 6 size: 96761 MB
node 6 free: 96545 MB
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159
node 7 size: 96759 MB
node 7 free: 96554 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 21 21 21 11 21 21 21
  1: 21 10 21 21 21 11 21 21
  2: 21 21 10 21 21 21 11 21
  3: 21 21 21 10 21 21 21 11
  4: 11 21 21 21 10 21 21 21
  5: 21 11 21 21 21 10 21 21
  6: 21 21 11 21 21 21 10 21
  7: 21 21 21 11 21 21 21 10

```

From /proc/meminfo

MemTotal: 791233596 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP3

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Platform Notes (Continued)

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
  Linux linux-jfwh 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 23 11:29

SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   415G   24G  392G   6% /

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Dell Inc. 1.0.0 03/20/2018
Memory:
  13x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666
  5x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
  7x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
  23x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

```

## Compiler Version Notes

```

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 519.lbm\_r(peak) 544.nab\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(peak) 510.parest\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 507.cactuBSSN\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
 ifort (IFORT) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(peak)

-----

icpc (ICC) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
 icc (ICC) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
 ifort (IFORT) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

-----

ifort (IFORT) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

-----

ifort (IFORT) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

-----

ifort (IFORT) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
 icc (ICC) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(peak) 527.cam4\_r(peak)

-----

ifort (IFORT) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
 icc (ICC) 18.0.0 20170811  
 Copyright (C) 1985-2017 Intel Corporation. All rights reserved.





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 379

PowerEdge R840 (Intel Xeon Gold 6148, 2.40 GHz)

SPECrate2017\_fp\_peak = 386

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-23 11:31:19-0400.

Report generated on 2018-10-31 17:16:45 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.