



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

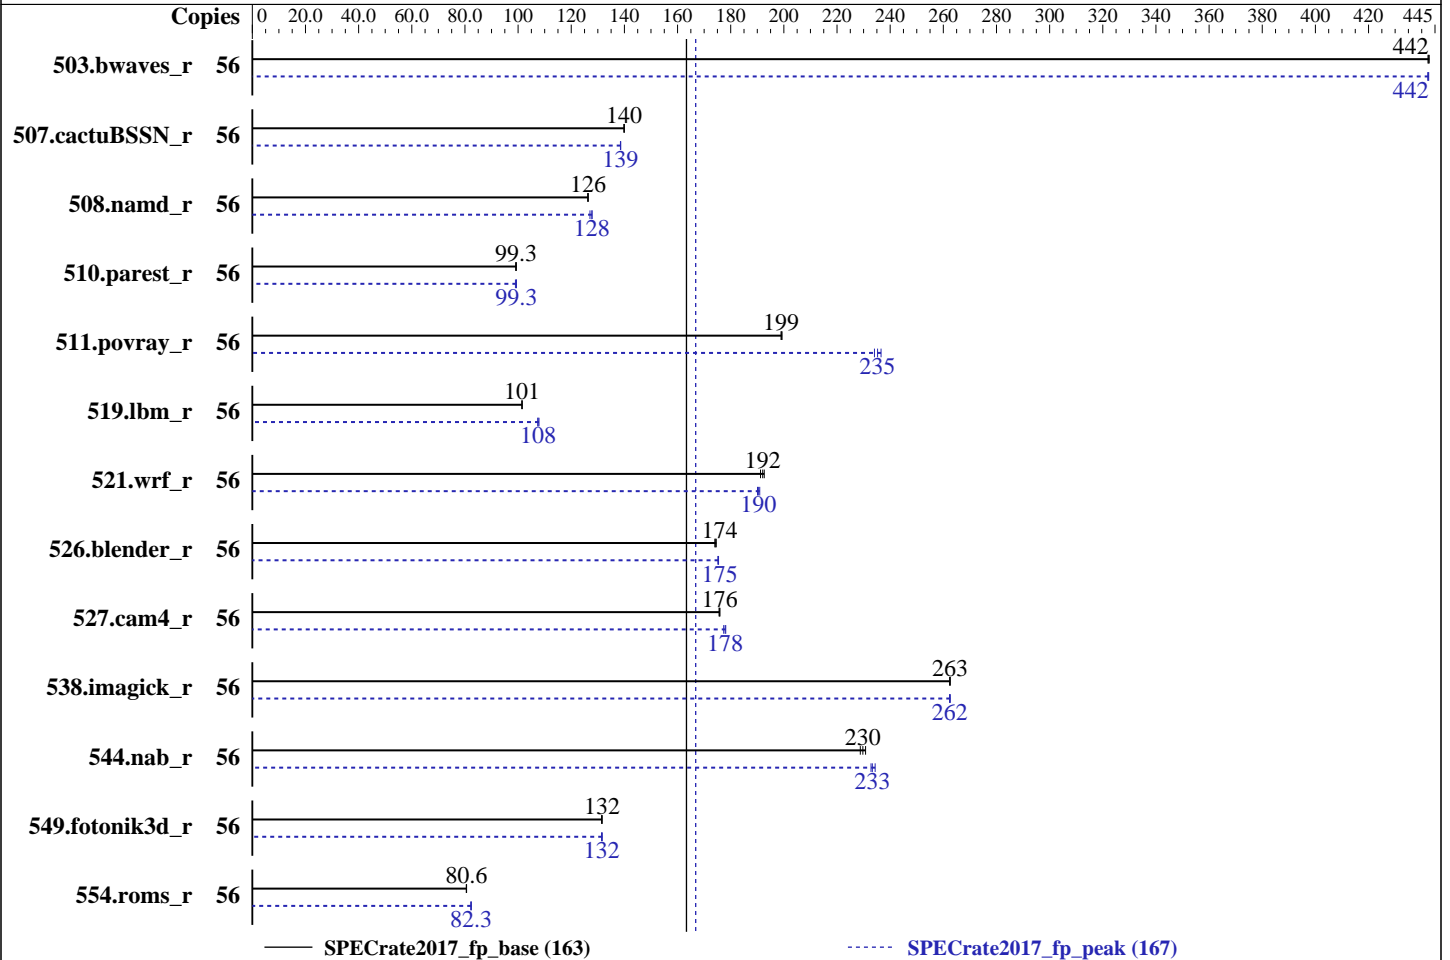

### Hardware

CPU Name: Intel Xeon Gold 6132  
 Max MHz.: 3700  
 Nominal: 2600  
 Enabled: 28 cores, 2 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
 4.4.114-94.11  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.0 released Mar-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	<b>1269</b>	<b>442</b>	1269	442	1268	443	56	1269	443	1270	442	<b>1269</b>	<b>442</b>
507.cactuBSSN_r	56	507	140	507	140	<b>507</b>	<b>140</b>	56	512	139	<b>512</b>	<b>139</b>	511	139
508.namd_r	56	<b>421</b>	<b>126</b>	422	126	421	126	56	416	128	<b>416</b>	<b>128</b>	419	127
510.parest_r	56	1478	99.1	1475	99.3	<b>1476</b>	<b>99.3</b>	56	1480	99.0	<b>1475</b>	<b>99.3</b>	1475	99.4
511.povray_r	56	656	199	<b>657</b>	<b>199</b>	657	199	56	<b>556</b>	<b>235</b>	553	237	559	234
519.lbm_r	56	<b>582</b>	<b>101</b>	581	102	582	101	56	550	107	<b>549</b>	<b>108</b>	547	108
521.wrf_r	56	656	191	651	193	<b>653</b>	<b>192</b>	56	657	191	660	190	<b>659</b>	<b>190</b>
526.blender_r	56	489	175	<b>490</b>	<b>174</b>	490	174	56	486	175	487	175	<b>486</b>	<b>175</b>
527.cam4_r	56	557	176	<b>557</b>	<b>176</b>	558	176	56	550	178	552	177	<b>551</b>	<b>178</b>
538.imagick_r	56	530	263	<b>530</b>	<b>263</b>	531	262	56	531	262	530	263	<b>531</b>	<b>262</b>
544.nab_r	56	412	229	<b>410</b>	<b>230</b>	408	231	56	<b>404</b>	<b>233</b>	405	233	402	234
549.fotonik3d_r	56	<b>1659</b>	<b>132</b>	1661	131	1658	132	56	1658	132	<b>1659</b>	<b>132</b>	1661	131
554.roms_r	56	<b>1105</b>	<b>80.6</b>	1104	80.6	1105	80.5	56	<b>1081</b>	<b>82.3</b>	1080	82.4	1082	82.2

SPECrate2017\_fp\_base = 163

SPECrate2017\_fp\_peak = 167

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-akdf Mon Apr 30 20:22:08 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz  
2 "physical id"s (chips)  
56 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 14  
siblings : 28  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 56  
On-line CPU(s) list: 0-55  
Thread(s) per core: 2

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Platform Notes (Continued)

```

Core(s) per socket: 14
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
Stepping: 4
CPU MHz: 2593.904
BogoMIPS: 5187.80
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52
node 0 size: 95228 MB
node 0 free: 94991 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53
node 1 size: 96758 MB
node 1 free: 96543 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54
node 2 size: 96758 MB
node 2 free: 96573 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55
node 3 size: 96756 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Platform Notes (Continued)

node 3 free: 96556 MB

node distances:

```

node  0  1  2  3
  0:  10  21  11  21
  1:  21  10  21  11
  2:  11  21  10  21
  3:  21  11  21  10

```

From /proc/meminfo

```

MemTotal:      394754412 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP3

From /etc/\*release\* /etc/\*version\*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3

```

```

# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

```

uname -a:

```

Linux linux-akdf 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 30 11:25

SPEC is set to: /home/cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   852G   18G  834G   3% /home

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 03/20/2018

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Platform Notes (Continued)

Memory:

20x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666  
1x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666  
3x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666  
24x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 519.lbm_r(peak) 544.nab_r(peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(base) 526.blender_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 511.povray\_r(peak) 526.blender\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 507.cactuBSSN\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 507.cactuBSSN\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 554.roms\_r(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

CC 521.wrf\_r(base) 527.cam4\_r(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
```

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Base Portability Flags (Continued)

```

511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2018  
Hardware Availability: May-2018  
Software Availability: Sep-2017

## Base Other Flags (Continued)

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 163

PowerEdge R840 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = 167

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: May-2018

Software Availability: Sep-2017

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-30 21:22:07-0400.

Report generated on 2018-10-31 17:17:05 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.