



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 548

## KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175


Test Date: May-2018

Test Sponsor: Huawei

Hardware Availability: Mar-2018

Tested by: Huawei

Software Availability: Mar-2018

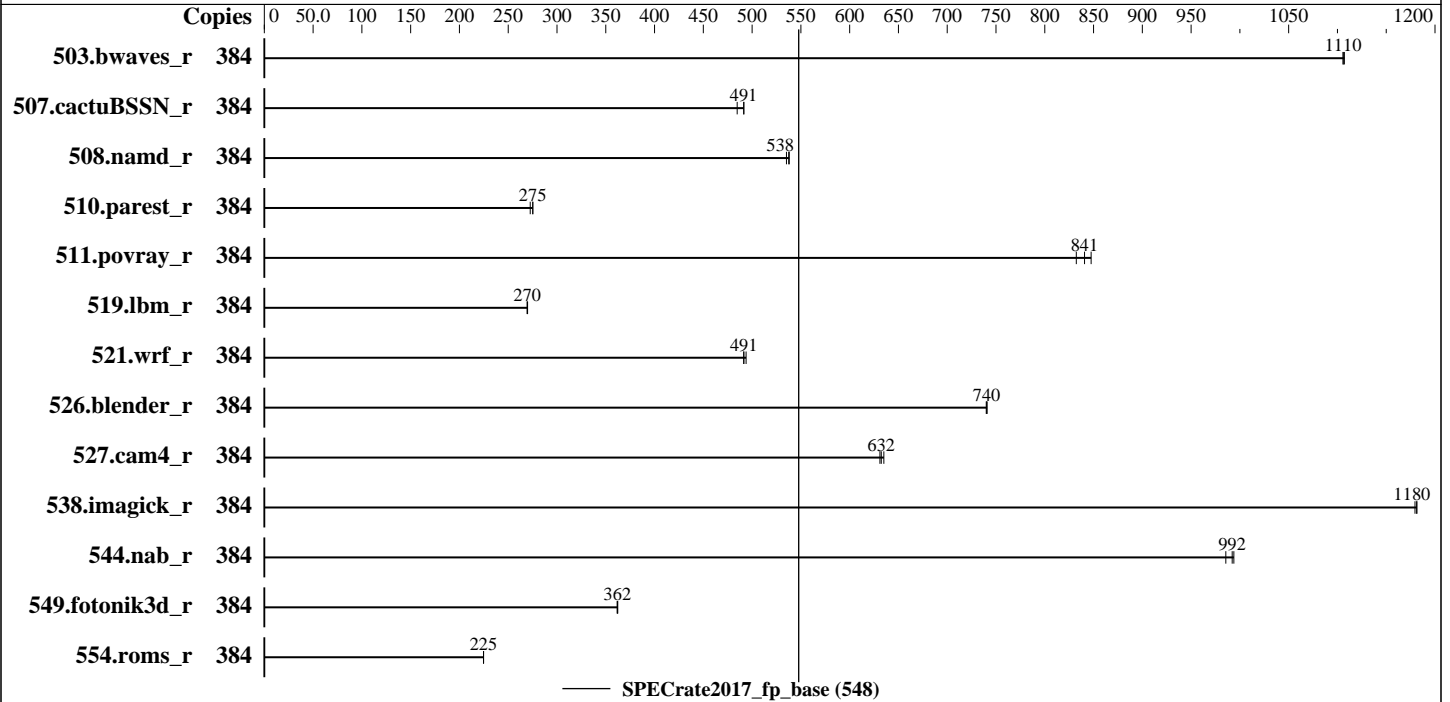

### Hardware

CPU Name: Intel Xeon E7-8890 v4  
 Max MHz.: 3400  
 Nominal: 2200  
 Enabled: 192 cores, 8 chips, 2 threads/core  
 Orderable: 4,8 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 2 TB (64 x 32 GB 2Rx4 PC4-2400T-R, running at 1333)  
 Storage: 3 x 900 GB SAS HDD 10K RPM, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.120-92.70-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Version BLXSV320 released Feb-2018  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: May-2018  
Hardware Availability: Mar-2018  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	<b><u>3482</u></b>	<b><u>1110</u></b>	3482	1110	3478	1110							
507.cactuBSSN_r	384	<b><u>989</u></b>	<b><u>491</u></b>	989	492	1003	485							
508.namd_r	384	<b><u>679</u></b>	<b><u>538</u></b>	682	535	678	538							
510.parest_r	384	3650	275	3686	273	<b><u>3651</u></b>	<b><u>275</u></b>							
511.povray_r	384	<b><u>1066</u></b>	<b><u>841</u></b>	1077	832	1058	848							
519.lbm_r	384	1502	269	<b><u>1501</u></b>	<b><u>270</u></b>	1500	270							
521.wrf_r	384	1742	494	<b><u>1750</u></b>	<b><u>491</u></b>	1750	491							
526.blender_r	384	789	741	<b><u>790</u></b>	<b><u>740</u></b>	790	740							
527.cam4_r	384	1058	635	<b><u>1062</u></b>	<b><u>632</u></b>	1064	631							
538.imagick_r	384	810	1180	808	1180	<b><u>808</u></b>	<b><u>1180</u></b>							
544.nab_r	384	650	994	656	986	<b><u>651</u></b>	<b><u>992</u></b>							
549.fotonik3d_r	384	4137	362	<b><u>4134</u></b>	<b><u>362</u></b>	4131	362							
554.roms_r	384	2716	225	2715	225	<b><u>2716</u></b>	<b><u>225</u></b>							

SPECrate2017\_fp\_base = 548

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Numba balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: May-2018  
Hardware Availability: Mar-2018  
Software Availability: Mar-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Memory Patrol Scrub set to Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-i5c0 Sat Jun 30 19:34:06 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz  
8 "physical id"s (chips)  
384 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 24  
siblings : 48  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 384  
On-line CPU(s) list: 0-383  
Thread(s) per core: 2  
Core(s) per socket: 24  
Socket(s): 8

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: May-2018  
Hardware Availability: Mar-2018  
Software Availability: Mar-2018

## Platform Notes (Continued)

```

NUMA node(s):      8
Vendor ID:         GenuineIntel
CPU family:        6
Model:             79
Model name:        Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
Stepping:          1
CPU MHz:           2199.996
CPU max MHz:       3400.0000
CPU min MHz:       1200.0000
BogoMIPS:          4400.06
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          256K
L3 cache:          61440K
NUMA node0 CPU(s): 0-23,192-215
NUMA node1 CPU(s): 24-47,216-239
NUMA node2 CPU(s): 48-71,240-263
NUMA node3 CPU(s): 72-95,264-287
NUMA node4 CPU(s): 96-119,288-311
NUMA node5 CPU(s): 120-143,312-335
NUMA node6 CPU(s): 144-167,336-359
NUMA node7 CPU(s): 168-191,360-383
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf
eagerfpu mce_recovery pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts
dtherm intel_pt spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdseed adx
smap xsaveopt cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 192 193 194
195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215
node 0 size: 257400 MB
node 0 free: 245342 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237
238 239
node 1 size: 258001 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: May-2018  
Hardware Availability: Mar-2018  
Software Availability: Mar-2018

## Platform Notes (Continued)

```

node 1 free: 248238 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261
262 263
node 2 size: 258001 MB
node 2 free: 248271 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285
286 287
node 3 size: 258001 MB
node 3 free: 248258 MB
node 4 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114
115 116 117 118 119 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304
305 306 307 308 309 310 311
node 4 size: 258001 MB
node 4 free: 248407 MB
node 5 cpus: 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137
138 139 140 141 142 143 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327
328 329 330 331 332 333 334 335
node 5 size: 258001 MB
node 5 free: 248420 MB
node 6 cpus: 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161
162 163 164 165 166 167 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351
352 353 354 355 356 357 358 359
node 6 size: 258001 MB
node 6 free: 248418 MB
node 7 cpus: 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185
186 187 188 189 190 191 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375
376 377 378 379 380 381 382 383
node 7 size: 257833 MB
node 7 free: 248240 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  21  31  21  41  41  51  51
1:  21  10  21  31  41  41  51  51
2:  31  21  10  21  51  51  41  41
3:  21  31  21  10  51  51  41  41
4:  41  41  51  51  10  21  31  21
5:  41  41  51  51  21  10  21  31
6:  51  51  41  41  31  21  10  21
7:  51  51  41  41  21  31  21  10

```

```

From /proc/meminfo
MemTotal:      2112758448 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

## Platform Notes (Continued)

```

/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
    Linux linux-i5c0 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
    x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Jun 30 11:30

SPEC is set to: /home/cpu2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda4        btrfs    2.4T  208G  2.2T   9% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS American Megatrends Inc. BLXSV320 2/23/2018
Memory:
 49x Hynix HMA84GR7MFR4N-UH 32 GB 2 rank 2400, configured at 1333
 9x Micron 36ASF4G72PZ-2G3B1 32 GB 2 rank 2400, configured at 1333
128x NO DIMM NO DIMM
 6x Samsung M393A4K40BB1-CRC 32 GB 2 rank 2400, configured at 1333

(End of data from sysinfo program)

```

## Compiler Version Notes

```

=====
CC 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

## Compiler Version Notes (Continued)

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 511.povray_r(base) 526.blender_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 507.cactuBSSN_r(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: May-2018  
Hardware Availability: Mar-2018  
Software Availability: Mar-2018

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: Mar-2018

Software Availability: Mar-2018

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

`-qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both Fortran and C:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

Benchmarks using both C and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3`

Benchmarks using Fortran, C, and C++:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte`

## Base Other Flags

C benchmarks:

`-m64 -std=c11`

C++ benchmarks:

`-m64`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using both C and C++:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 548

KunLun 9008 (Intel Xeon E7-8890 v4)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3175

**Test Sponsor:** Huawei

**Tested by:** Huawei

**Test Date:** May-2018

**Hardware Availability:** Mar-2018

**Software Availability:** Mar-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-30 07:34:05-0400.

Report generated on 2018-10-31 17:31:21 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.