



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175


Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

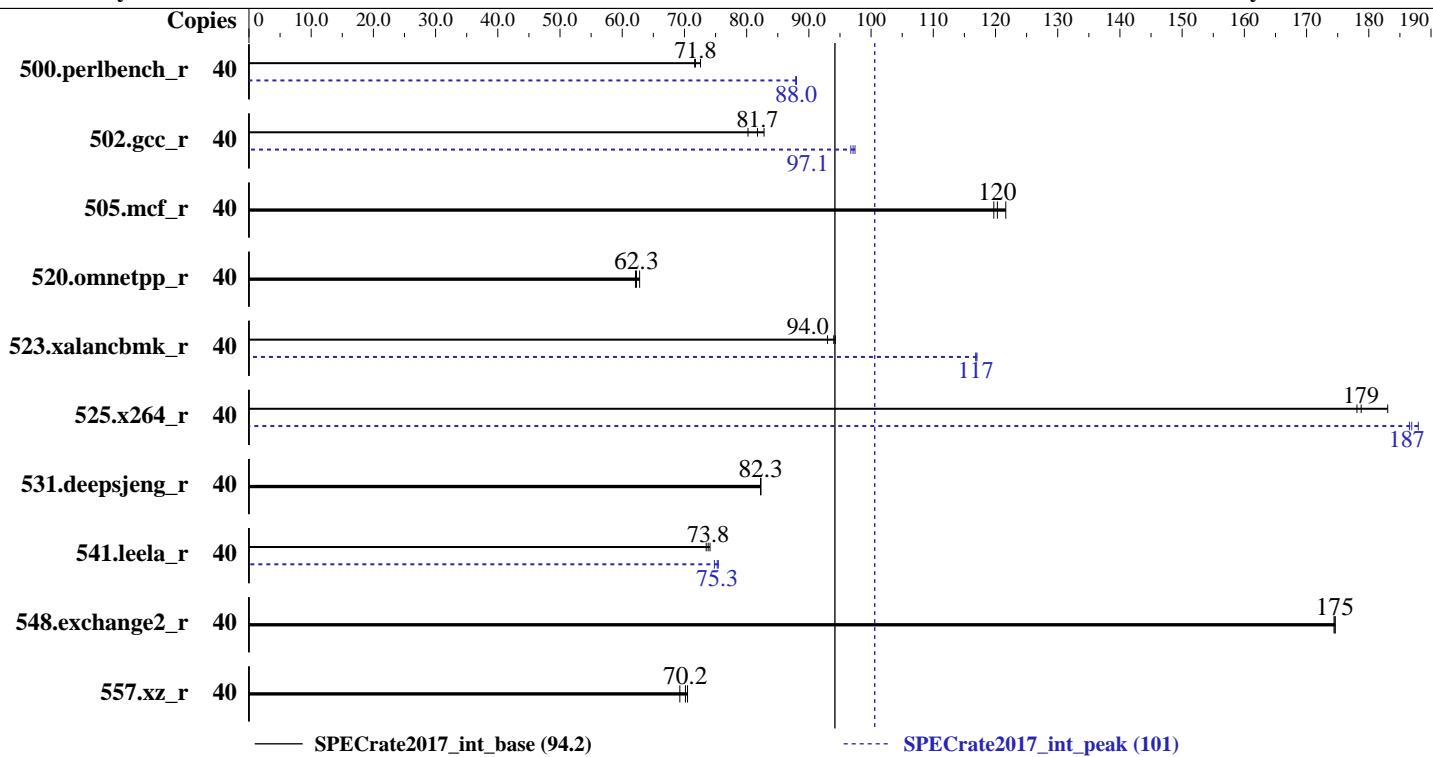

Hardware		Software	
CPU Name:	Intel Xeon Silver 4114	OS:	Red Hat Enterprise Linux Server release 7.4 (Maipo)
Max MHz.:	3000	Compiler:	3.10.0-693.11.6.el7.x86_64 C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Nominal:	2200		Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Enabled:	20 cores, 2 chips, 2 threads/core	Parallel:	No
Orderable:	1,2 chips	Firmware:	Version 0.62 Released Mar-2018
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	xfs
L2:	1 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	13.75 MB I+D on chip per chip	Base Pointers:	64-bit
Other:	None	Peak Pointers:	32/64-bit
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R,, running at 2400)	Other:	jemalloc: jemalloc memory allocator library V5.0.1;
Storage:	1 x 1200 GB SAS, 10000 RPM		
Other:	None		



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	889	71.6	<b>887</b>	<b>71.8</b>	877	72.6	40	<b>724</b>	<b>88.0</b>	724	88.0	725	87.9
502.gcc_r	40	706	80.2	<b>693</b>	<b>81.7</b>	684	82.8	40	<b>581</b>	<b>97.4</b>	<b>583</b>	<b>97.1</b>	585	96.7
505.mcf_r	40	531	122	540	120	<b>537</b>	<b>120</b>	40	531	122	540	120	<b>537</b>	<b>120</b>
520.omnetpp_r	40	<b>843</b>	<b>62.3</b>	845	62.1	836	62.8	40	<b>843</b>	<b>62.3</b>	845	62.1	836	62.8
523.xalancbmk_r	40	448	94.3	454	93.0	<b>449</b>	<b>94.0</b>	40	<b>361</b>	<b>117</b>	362	117	361	117
525.x264_r	40	<b>392</b>	<b>179</b>	393	178	383	183	40	375	187	<b>375</b>	<b>187</b>	373	188
531.deepsjeng_r	40	557	82.2	557	82.3	<b>557</b>	<b>82.3</b>	40	557	82.2	557	82.3	<b>557</b>	<b>82.3</b>
541.leela_r	40	<b>897</b>	<b>73.8</b>	901	73.5	894	74.1	40	<b>880</b>	<b>75.3</b>	878	75.4	885	74.8
548.exchange2_r	40	<b>600</b>	<b>175</b>	601	174	600	175	40	<b>600</b>	<b>175</b>	601	174	600	175
557.xz_r	40	624	69.3	<b>616</b>	<b>70.2</b>	613	70.5	40	624	69.3	<b>616</b>	<b>70.2</b>	613	70.5

SPECrate2017\_int\_base = 94.2

SPECrate2017\_int\_peak = 101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or

<https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Power Policy Set to Performance

XPT Prefetch Set to Enabled

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost.localdomain Fri Jun 1 15:43:29 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
  2 "physical id"s (chips)
  40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 10
  siblings : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                40
On-line CPU(s) list:  0-39
Thread(s) per core:   2
Core(s) per socket:   10
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Silver 4114 CPU @ 2.20GHz
Stepping:               4
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Platform Notes (Continued)

CPU MHz: 2200.000  
BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 14080K  
NUMA node0 CPU(s): 0-9,20-29  
NUMA node1 CPU(s): 10-19,30-39  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 invpcid\_single intel\_pt spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq\_llc cqmq\_occu\_llc cqmq\_mbmb\_total cqmq\_mbmb\_local dtherm ida arat pln pts

/proc/cpuinfo cache data  
cache size : 14080 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29  
node 0 size: 195701 MB  
node 0 free: 190498 MB  
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39  
node 1 size: 196608 MB  
node 1 free: 192029 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 395141240 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.4 (Maipo)"  
ID="rhel"

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Platform Notes (Continued)

```
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-693.11.6.el7.x86_64 #1 SMP Thu Dec 28 14:23:39 EST
2017 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 1 15:41

SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   700G   39G   662G   6%  /


Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.62 03/26/2018
Memory:
 24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)
```

## Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Compiler Version Notes (Continued)

```
=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
      541.leela_r(base)
=====
```

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
      541.leela_r(peak)
=====
```

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====
FC 548.exchange2_r(base, peak)
=====
```

```
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

<b>Huawei</b>	SPECrate2017_int_base = 94.2
Huawei 1288H V5 (Intel Xeon Silver 4114)	<b>SPECrate2017_int_peak = 101</b>
CPU2017 License: 3175	<b>Test Date:</b> Jun-2018
Test Sponsor: Huawei	<b>Hardware Availability:</b> Jul-2017
Tested by: Huawei	<b>Software Availability:</b> Jan-2018

## **Base Portability Flags (Continued)**

541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/ie5.0.1-64/lib -liemalloc
```

## C++ benchmarks

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/jetson-hat/lib -liemalloc
```

Fortran benchmarks

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/ie5.0.1-64/lib -lijemalloc
```

## Base Other Flags

C benchmarks:

-m64 -std=c11

## C++ benchmarks:

-m64

### Fortran benchmarks:

-m64

## Peak Compiler Invocation

C benchmarks:

icc

## C++ benchmarks:

jcpd

### Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc

502.gcc\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc

531.deepsjeng\_r: basepeak = yes

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_int\_base = 94.2

Huawei 1288H V5 (Intel Xeon Silver 4114)

SPECrate2017\_int\_peak = 101

CPU2017 License: 3175

Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2017

Tested by: Huawei

Software Availability: Jan-2018

## Peak Optimization Flags (Continued)

541.leela\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

-m64 -std=c11

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

-m64

523.xalancbmk\_r: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-01 15:43:28-0400.

Report generated on 2018-10-31 17:27:54 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.